

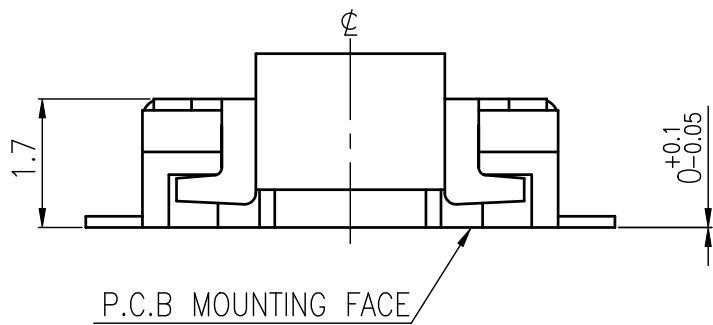
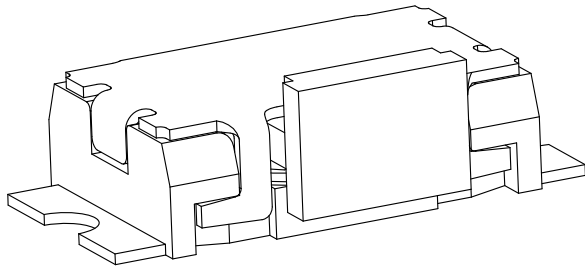



RoHS Compliant

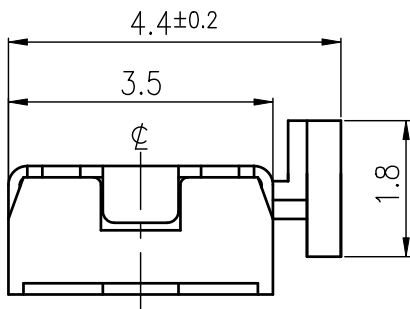


REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2019.11.26	Jane Shen	C			
B				D			
SPECIFICATIONS							
RATING		DC32V 50mA MAX.		TIMING			
CONTACT RESISTANCE		100mΩ MAX.		OPERATION (TORQUE)			
INSULATION RESISTANCE		DC100V-1000MΩ MIN.		STROKE (ANGLE)		0.3±0.15mm	
WITHSTAND VOLTAGE		AC250V-1 MINUTE		LIFE		100,000 Cycles	
REMARKS:							

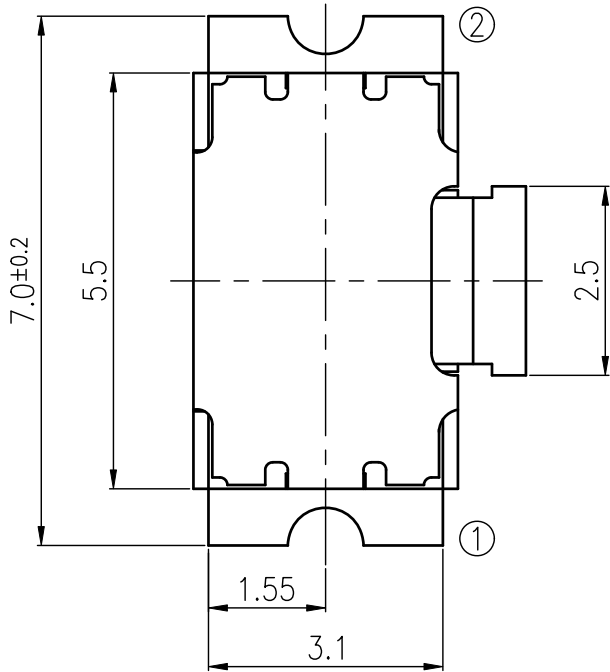

SCHEMATIC



P.C.B LAYOUT

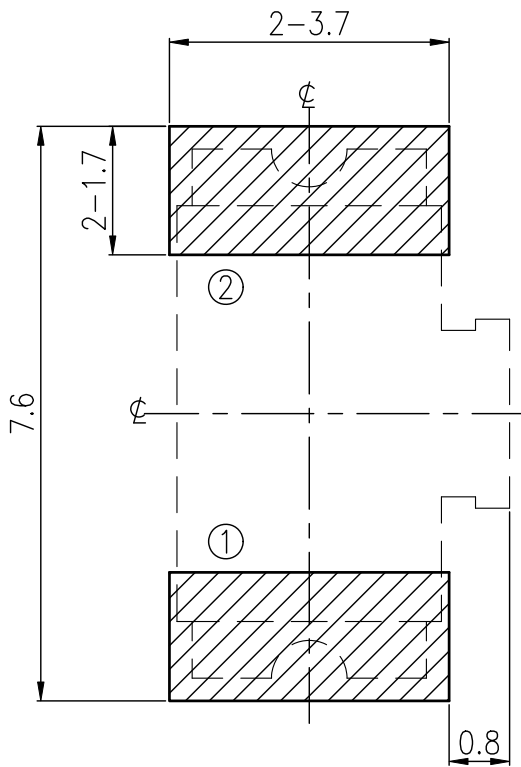

MODEL NO.	OPERATING FORCE
ETC318-AA1G-B200T	200±50gf
ETC318-AA1G-B250T	250±50gf
ETC318-AA1G-B400T	400±100gf


TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.1			SIGNATURES		DATE	MODEL	
			DRAWER	Jane Shen	2019.11.26	TITLE	TACT SWITCH
			CHECKED	<i>Landry Su</i>	2019.11.26		
	UNIT mm	SCALE 10/1	REVIEWED			NO.	See Model No.
			APPROVALS		Qiuyuan Chuang		

TAIWAN MISAKI ELECTRONICS CO., LTD.

THE PACKING SPECIFICATIONS


RoHS Compliant

1.STRUCTURE AND MATERIALS

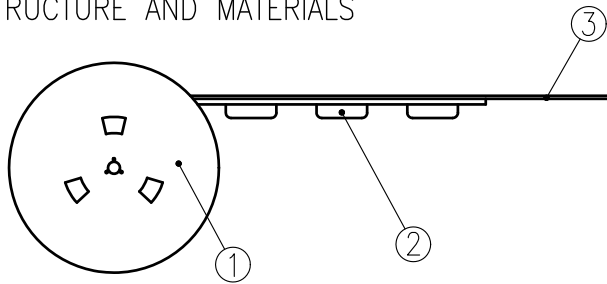

③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE
NO.	PARTS NAME	MATERIALS

- PACKAGING QUANTITY : 3,000 PCS/REEL
- MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.
- SHORTAGE LESS THAN 10 PCS A REEL IS ACCETABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.
- STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 130 gf AND STRIPPING ANGLE SHOULD BE WITHIN 165° ~ 180° .
- THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.
- TAPE AND REEL PER EIA-481
- DIMENSIONS :

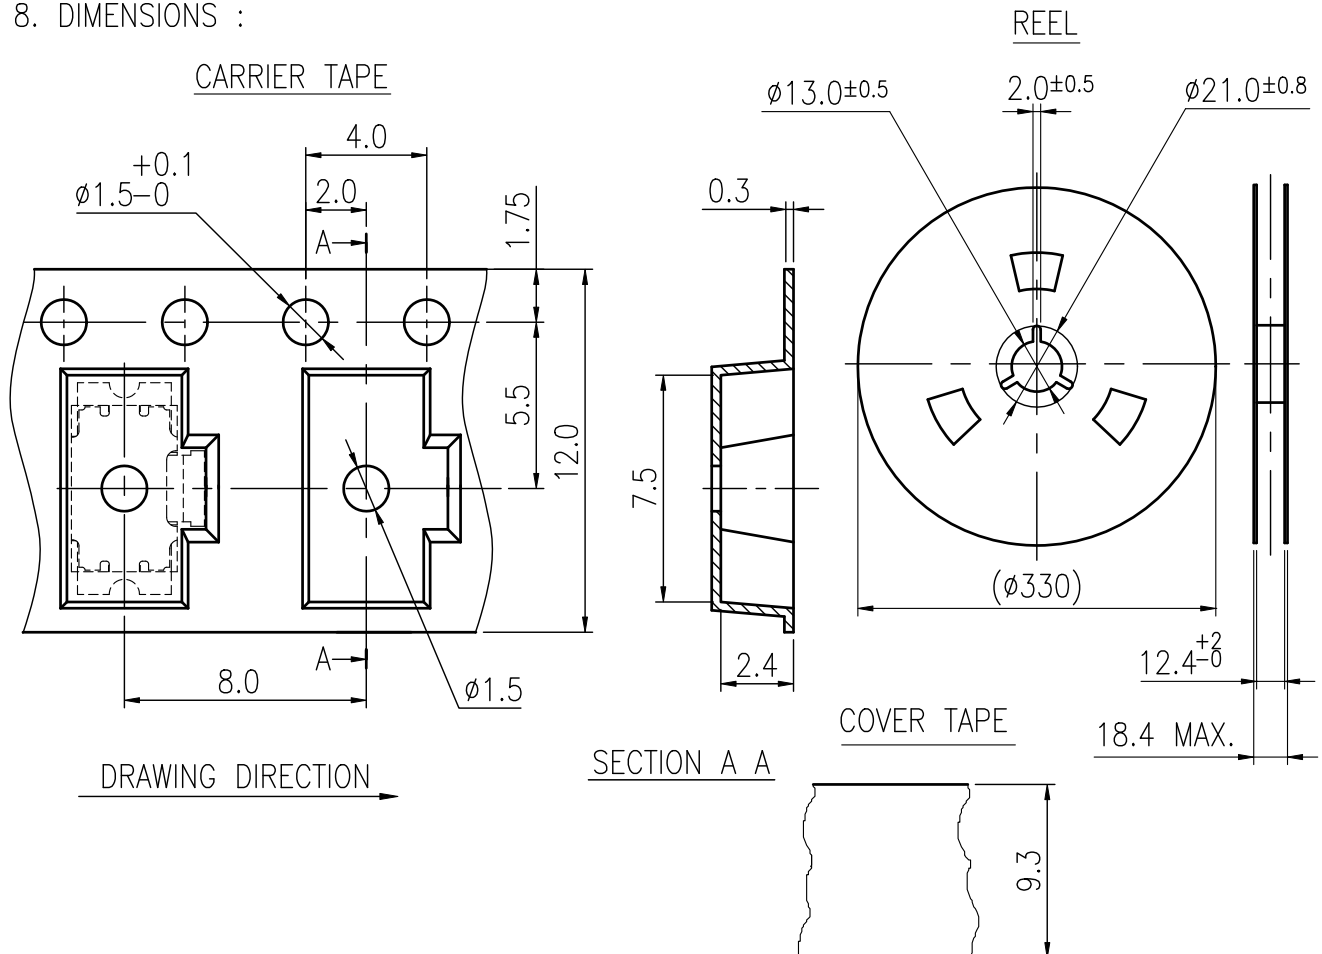

				APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
							Jane Shen	NTC_318-AA_G-A,B
								PAGINATE.
								1/1
								SPEC NO.
								P-810
SYM	DISCRPTION	DATE	APPROVED					

TAIWAN MISAKI ELECTRONICS CO.,LTD.