
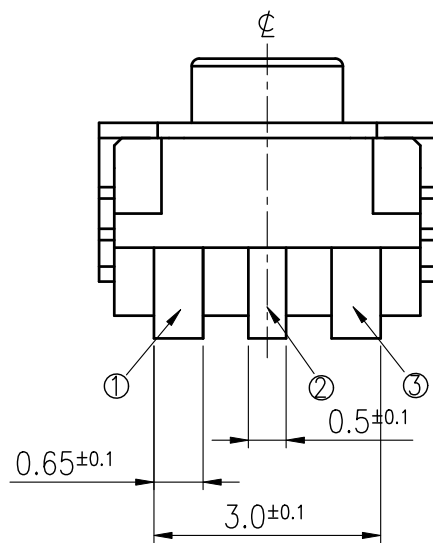
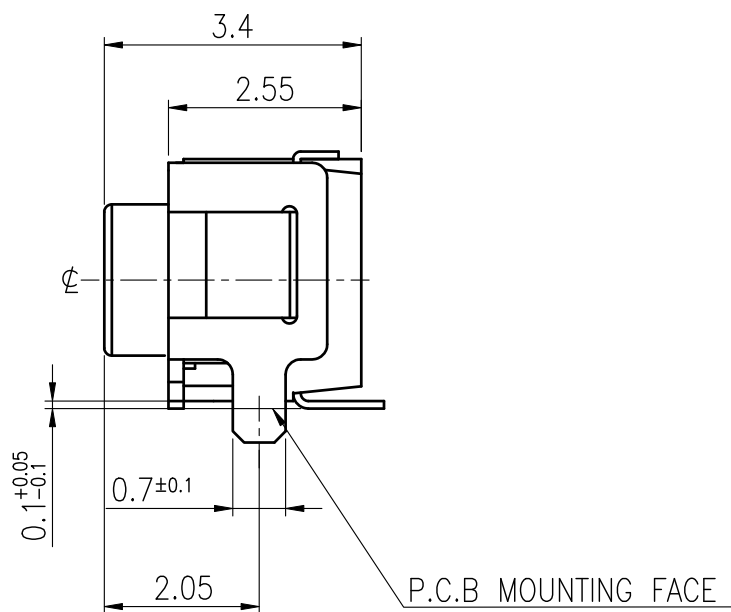
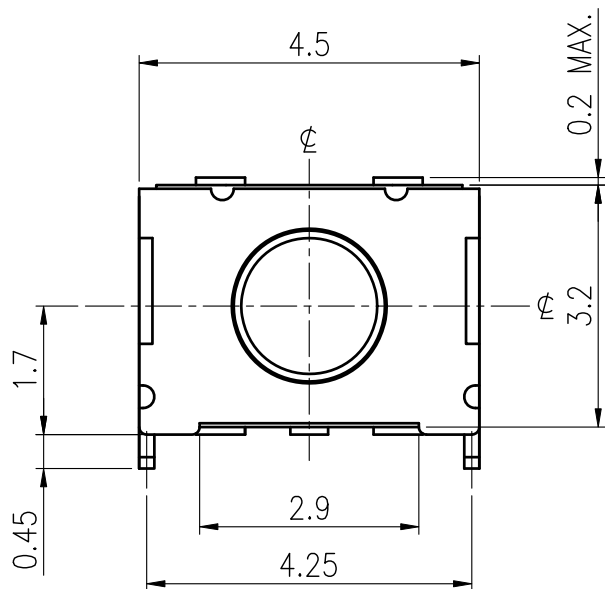
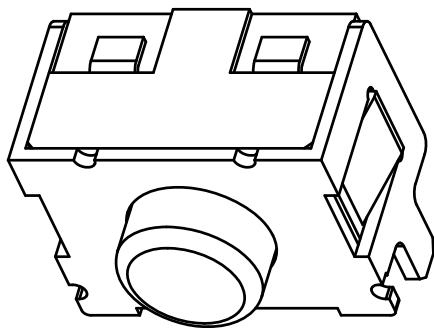


RoHS Compliant

T-MEC
TAIWAN MISAKI ELECTRONICS CO., LTD.
ISSUED
2013.11.04
RD DCC

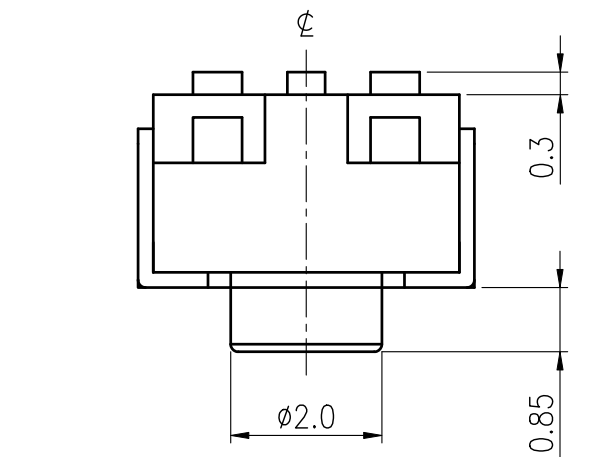



REVISIONS

Rev	DESCRIPTION	DATE	DRAWER	REV	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2013.10.29	Jane Shen	C			
B				D			

SPECIFICATIONS

RATING	DC12V 50mA	TIMING	
CONTACT RESISTANCE	500mΩ MAX.	OPERATION (TORQUE)	160±50 gf
INSULATION RESISTANCE	DC500V-100MΩ MIN.	STROKE (ANGLE)	0.2±0.1mm
WITHSTAND VOLTAGE	AC250V-1 MINUTE	CONTACT RESISTANCE	1Ω MAX.
REMARKS:		(AFTER 100,000 CYCLES LIFE TEST)	

SCHEMATIC

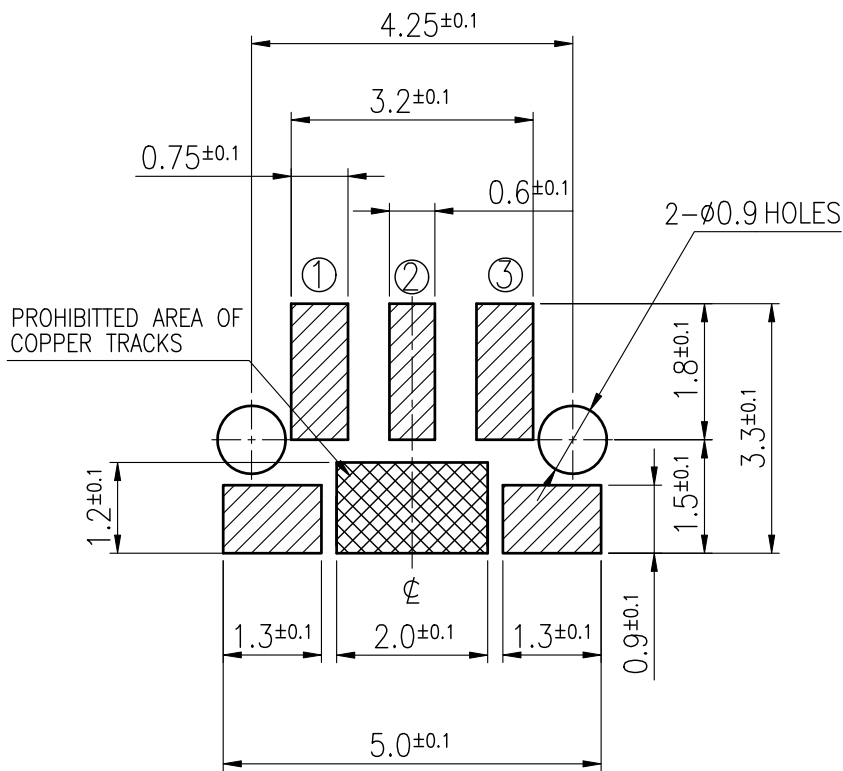

HATCHED AREA SHOWS SOLDERING LAND
(TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.1)


TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.2	SIGNATURES		DATE	MODEL
	DRAWN	Jane Shen	2013.10.29	TITLE TACT SWITCH
	CHECKED	Jamie Li	2013.10.29	
	UNIT	mm	SCALE	10/1
	REVIEWED			
APPROVALS			Dennis Hung	2013.10.30

TAIWAN MISAKI ELECTRONICS CO., LTD.

THE PACKING SPECIFICATIONS


RoHS Compliant

1. STRUCTURE AND MATERIALS

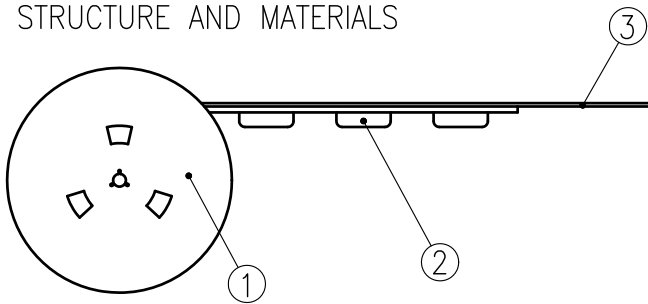

③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE
NO.	PARTS NAME	MATERIALS

- PACKAGING QUANTITY : 1,900 PCS/REEL.
- MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.
- SHORTAGE LESS THAN 10 PCS A REEL IS ACCERABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.
- STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 130 gf AND STRIPPING ANGLE SHOULD BE WITHIN 165°~180°.
- THE PRODUCT IN THE POCKER OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.
- TAPE AND REEL PER EIA-481
- DIMENSIONS :

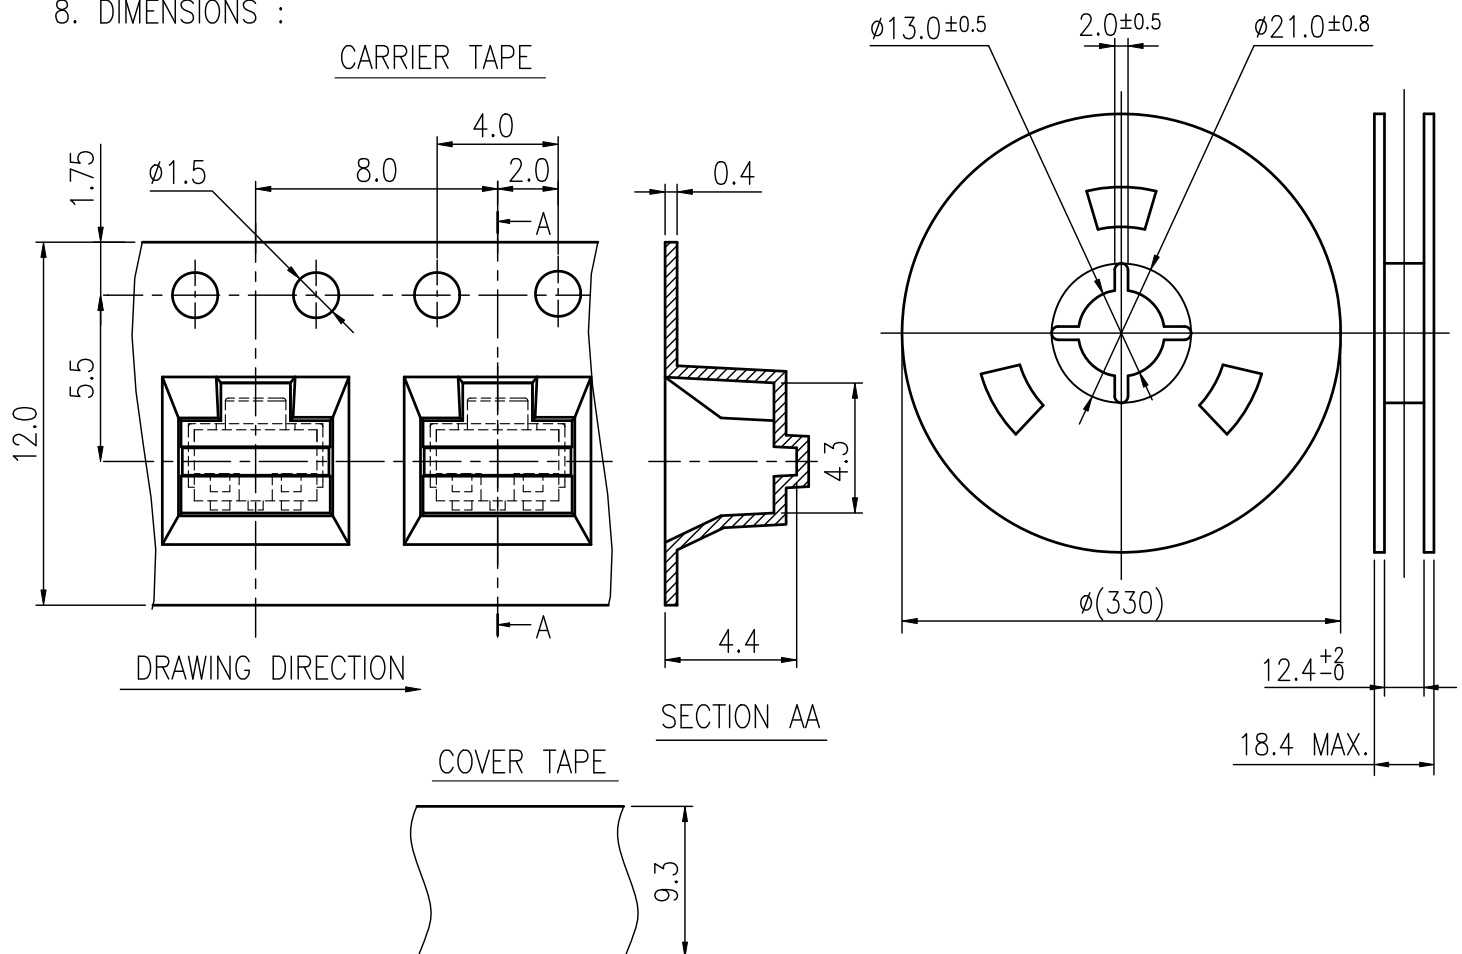

				APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
							Jane Shen	NTC325-(A,D)A1J-
				Qiuyuan Chuang				PAGINATE.
								1/1
								SPEC NO.
								P-455
SYM	DISCRIPTION	DATE	APPROVED					

TAIWAN MISAKI ELECTRONICS CO.,LTD.