
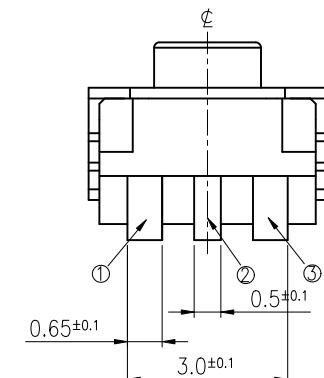
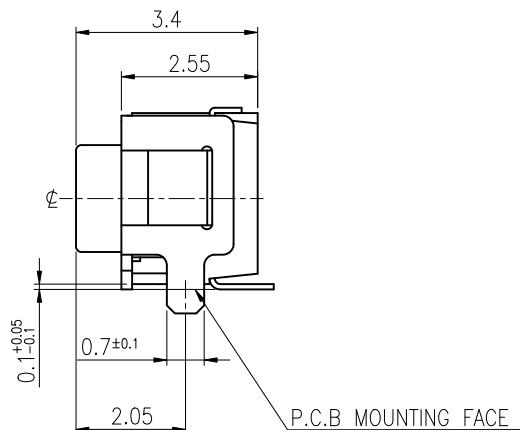
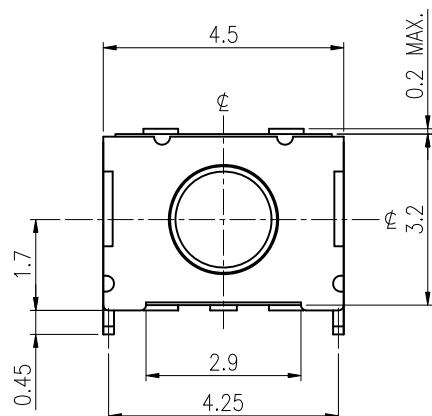
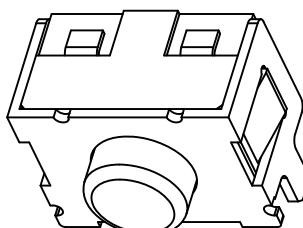




RoHS Compliant

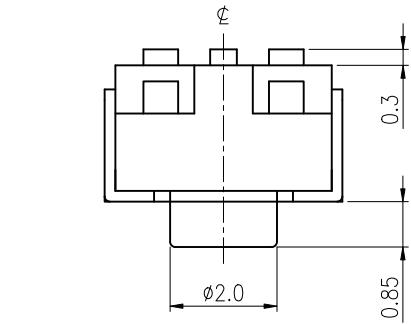

REVISIONS		DATE	DRAWER	REV	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2014.01.09	Jane Shen	C			
B				D			

SPECIFICATIONS							
RATING		DC12V 50mA		TIMING			
CONTACT RESISTANCE		500mΩ MAX.		OPERATION (TORQUE)		200±50 gf	
INSULATION RESISTANCE		DC500V-100MΩ MIN.		STROKE (ANGLE)		0.2±0.1mm	
WITHSTAND VOLTAGE		AC250V-1 MINUTE		LIFE		1,000,000 CYCLES	
REMARKS:							

SCHEMATIC

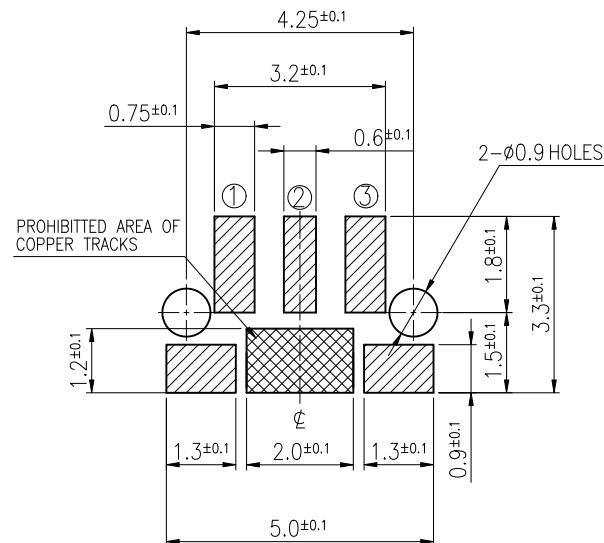


HATCHED AREA SHOWS SOLDERING LAND  
(TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.1)

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.2			SIGNATURES	DATE	MODEL
DRAWN	Jane Shen		2014.01.09		TITLE
CHECKED					TACT SWITCH
REVIEWED					NO.
APPROVALS	Dennis Hung		2014.01.09		ETC325-DA1J-A200TX
TAIWAN MISAKI ELECTRONICS CO., LTD.					

# THE PACKING SPECIFICATIONS


RoHS Compliant

## 1. STRUCTURE AND MATERIALS

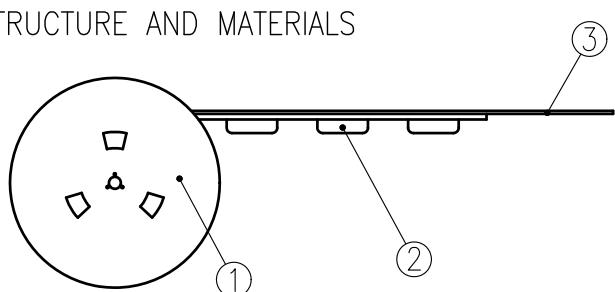

NO.	PARTS NAME	MATERIALS
③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE

- PACKAGING QUANTITY : 1,900 PCS/REEL
- MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.
- SHORTAGE LESS THAN 10 PCS A REEL IS ACCEPTABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.
- STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 130 gf AND STRIPPING ANGLE SHOULD BE WITHIN  $165^\circ \sim 180^\circ$ .
- THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.
- TAPE AND REEL PER EIA-481
- DIMENSIONS :

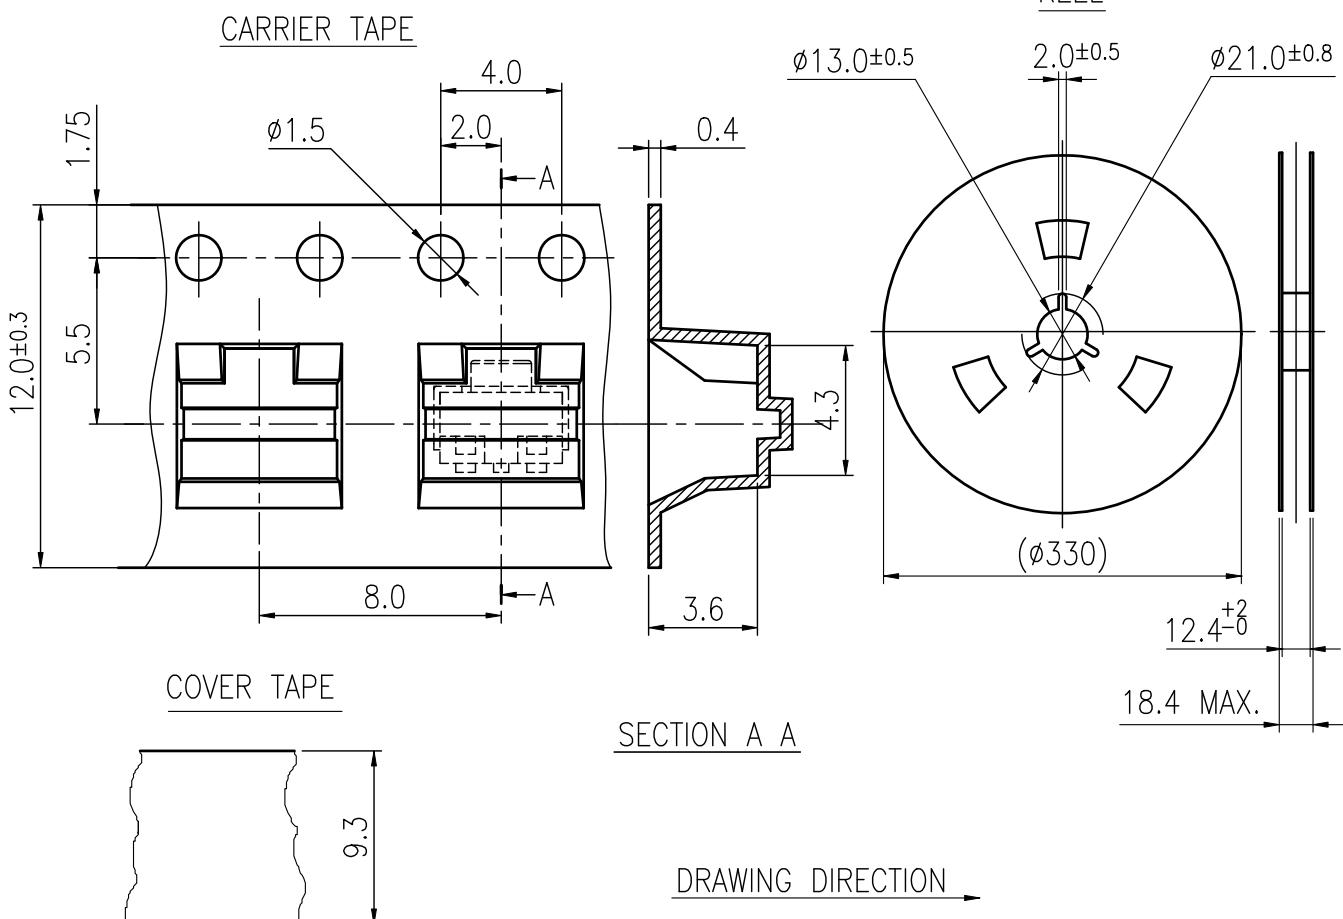

SYM	DESCRIPTION	DATE	APPROVED	APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
								NTC_325-_A1J SEIRES
								PAGINATE. 1/1 SPEC NO. P-603