

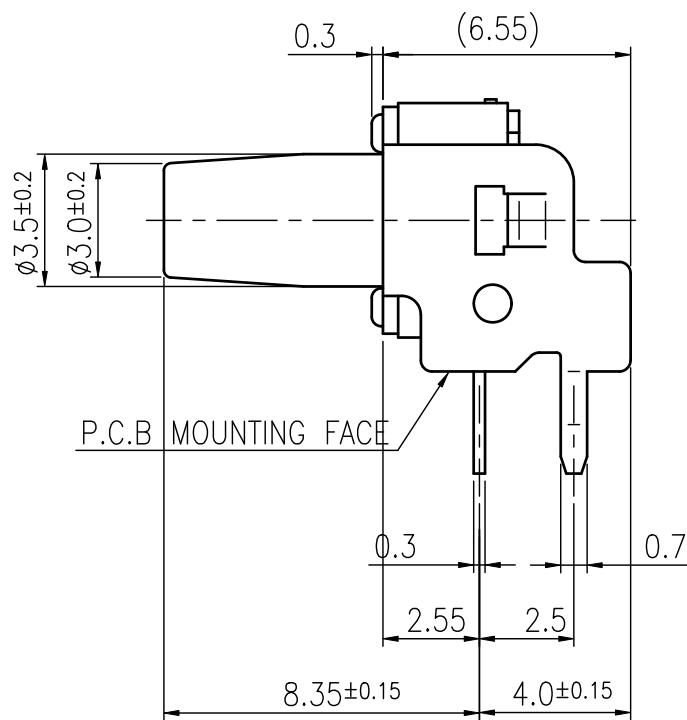
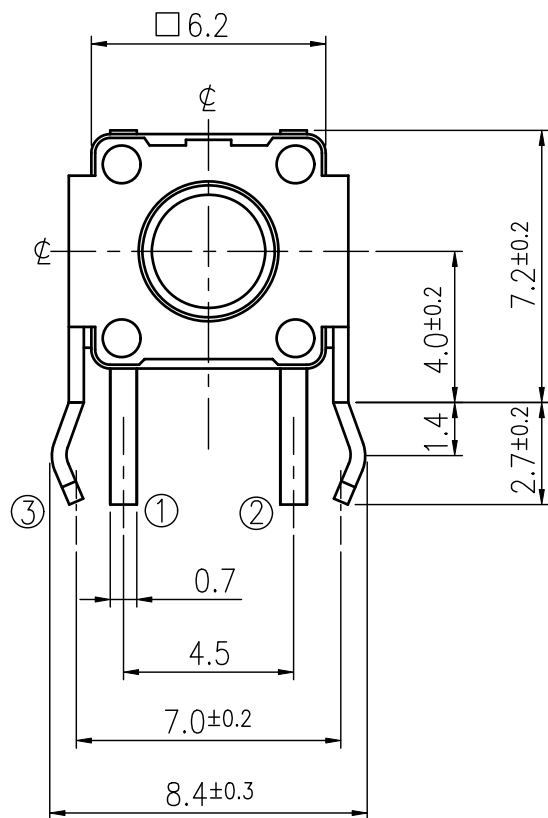


RoHS Compliant

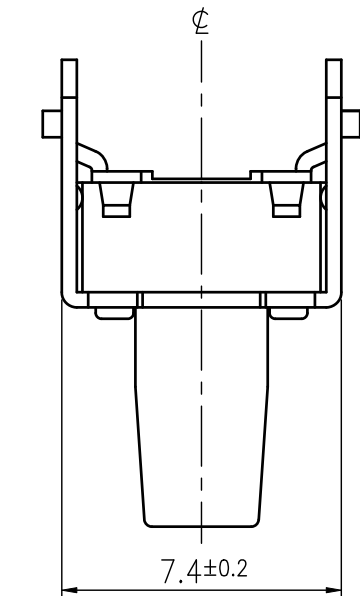


REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2018.10.01	Jane Shen	C			
B				D			
SPECIFICATIONS							
RATING		DC12V 50mA		TIMING			
CONTACT RESISTANCE		100mΩ MAX.		OPERATION (TORQUE)		160±50gf	
INSULATION RESISTANCE		DC500V - 100MΩ MIN.		STROKE (ANGLE)		0.25 ^{+0.2} _{-0.1} mm	
WITHSTAND VOLTAGE		AC250V - 1 MINUTE.		LIFE		1,000,000 CYCLES	
REMARKS:							

SCHEMATIC

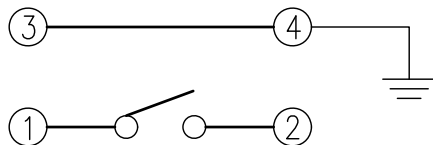

P.C.B. LAYOUT

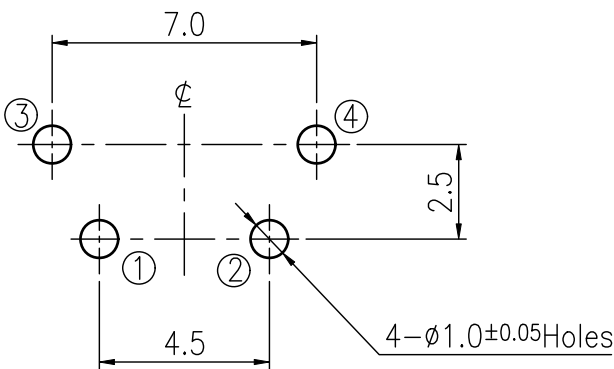

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.1			SIGNATURES		DATE	MODEL
	UNIT mm	SCALE 5/1	DRAWER	Jane Shen	2018.10.01	TITLE TACT SWITCH
			CHECKED	<i>Landry Su</i>	2018.10.01	
			REVIEWED			NO. ETCX304-APD-C16001
			APPROVALS	<i>Dennis Hung</i>	2018.10.01	

TAIWAN MISAKI ELECTRONICS CO., LTD.