


THE PACKING SPECIFICATIONS

RoHS Compliant

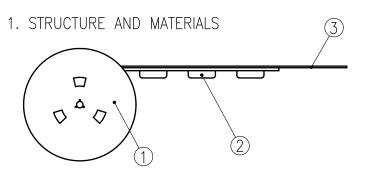

3	COVER TAPE	POLYESTER
2	CARRIER TAPE	POLYSTYRENE
1	REEL	POLYSTYRENE
NO.	PARTS NAME	MATERIALS

- 2. PACKAGING QUANTITY: 1,800 PCS/REEL.
- 3. MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.
- 4. SHORTAGE LESS THAN 10 PCS A REEL IS ACCERABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.
- 5. STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 130 gf AND STRIPPING ANGLE SHOULD BE WITHIN 165°~180°.
- 6. THE PRODUCT IN THE POCKER OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.
- 7. TAPE AND REEL PER EIA-481

