


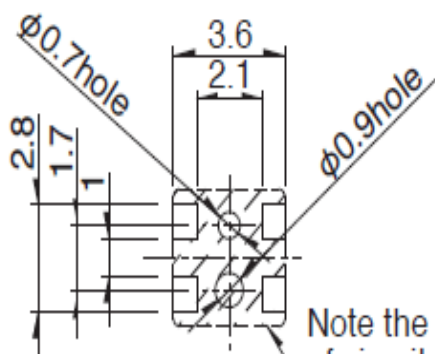

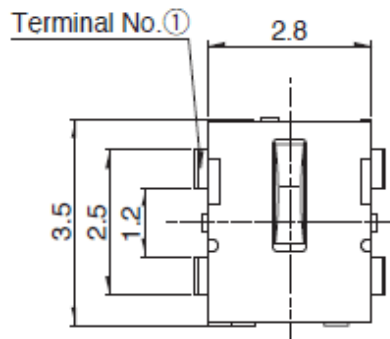
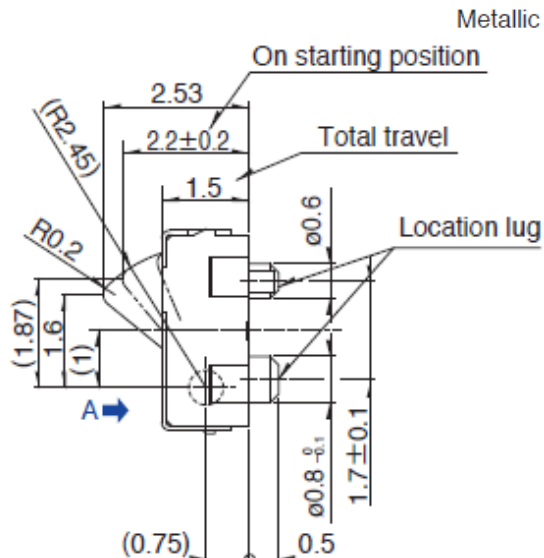




Note the arrangement of circuit patterns



Metallic plane (common to the terminal ①②,  
1) from surface,  
dent of portion: (0.05)

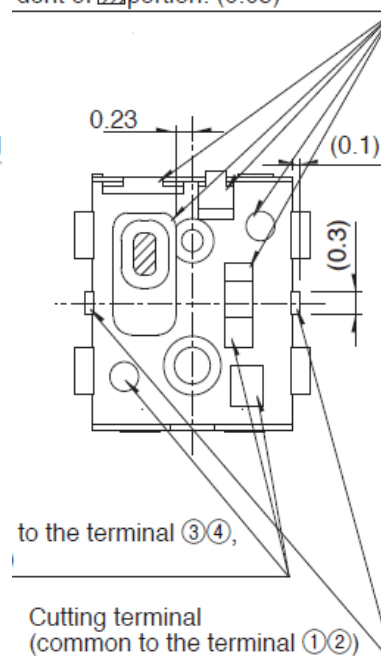

- 1.端子形状 For PC board (Reflow)
- 2.动作力 0.4N max.
- 3.框架 Without terminal
- 4.定位销 有
- 5.使用温度范围 -40°C to +85°C
- 6.最大额定/最小额定(电阻负载) 1mA 5V DC/50  $\mu$ A 3V DC
- 7.接触电阻(初期/寿命后) 2  $\Omega$  max./5  $\Omega$  max.
- 8.绝缘电阻 100M  $\Omega$  min. 100V DC
- 9.耐电压 100V AC for 1 minute
- 10.端子强度 1N for 1 minute
- 11.操作部强度 5N
- 12.无负载寿命 50,000 cycles 5  $\Omega$  max.
- 13.负载寿命(最大额定负载) 50,000 cycles 5  $\Omega$  max.
- 14.耐寒性能 -40°C 96h
- 15.耐热性能 85°C 96h
- 16.耐湿性能 40°C, 90 to 95%RH 96h

UNLESS OTHERWISE,  
GENERAL TOLERANCE:

X.xxx  $\pm 0.10$   
X.xx  $\pm 0.20$   
X.x  $\pm 0.30$   
X.  $\pm 0.38$

ANGULAR:

X.xx  $\pm 1^\circ$   
X.x  $\pm 3^\circ$   
X.  $\pm 5^\circ$

**KKK** 东莞市洋瀚实业有限公司  
DONGGUANSHI YANGHAN INDUSTRIAL CO., LTD

TITLE:

P/N: DS-005S

MODEL: Detector Switches

DRAW NO.:

客户图

THIRD ANGLE PROJECTION

UNIT:

SCALE:

SIZE:

SHEET:



mm

1:1

A4

1/1

20121107001

X

NEW DRAWING

2010.10..17

Rock

DESIGN

CHECK

APPROVAL

林凯南

2013.10.17

ECN NO.

REV.

DESCRIPTION

DATE

CHANGE