

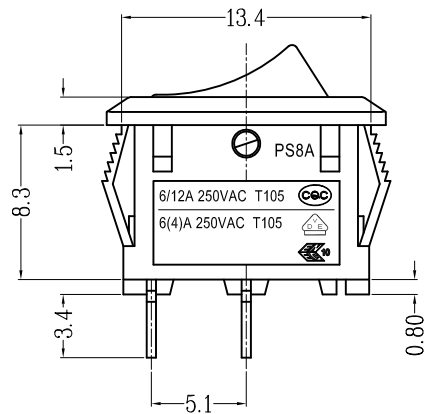
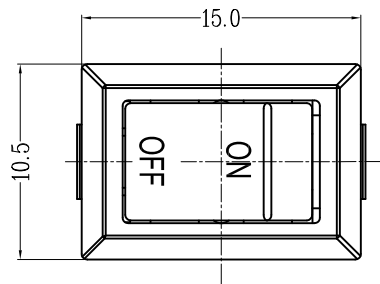
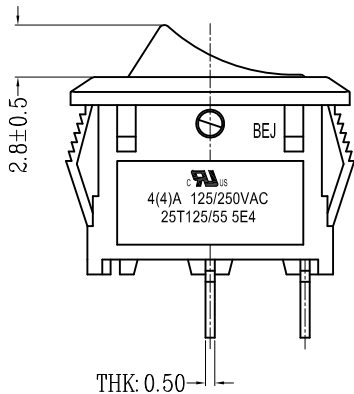
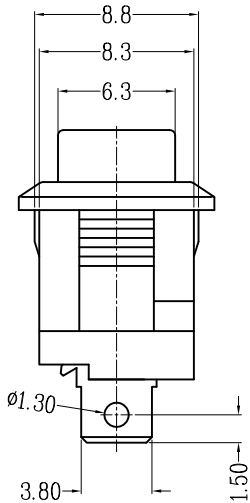



- 1、FUNCTION: OFF-ON
2、RATING: UL: 4(4)A 125/250VAC 25T125/55 5E4
ENEC VDE: 6(4)A 250VAC T105
CQC: 6/12A 250VAC T105
3、OPERATION FORCE: 700±400g.f
4、CONTACT RESISTANCE: ≤ 50 mΩ
5、INSULATION RESISTANCE ≥ 100 MΩ
6、DIELECTRIC WITHSTAND: TERMINAL TO BUTTON 3000VAC/10mA/1MINUTE
TERMINAL TO TERMINAL 1500VAC/10mA/1MINUTE
7、CIRCUIT DIAGRAM:



8. SUGGESTED PANEL HOLE SIZE

PANEL THICKNESS	DIM.X	DIM.Y
0.75-1.25	13.5/13.6	9.0
1.25-2.0	13.7/13.8	9.0
2.0-3.0	13.9/14.0	9.0



TOLERANCE UNLESS SPECIFIED					
X: ±0.30 .XX: ±0.15 ANGULAR: ±3.0°					
PROJECTION: 		V3.0			
ISSUE		DATE		DESCRIPTIONS OF REVISION	
TITLE:ROCKER SWITCH		UNIT: mm		SCALE: NOT SCALE	
MODEL: PS8A-2M-B1B5-1H15-38		FUNCTION: ON-OFF		DRWG NO.: BEJ-FH-W0770	
		DWN.		杨 梅	2020-12-02
		CHK'D.		臧慧玲	2020-12-02
		APPD.		冯 辉	2020-12-02