

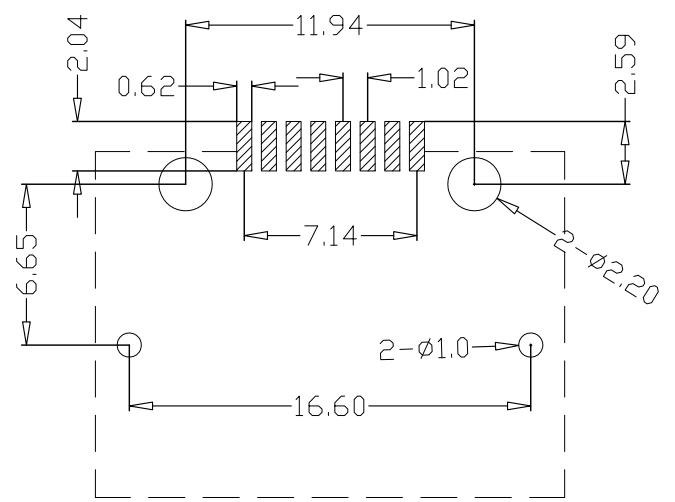
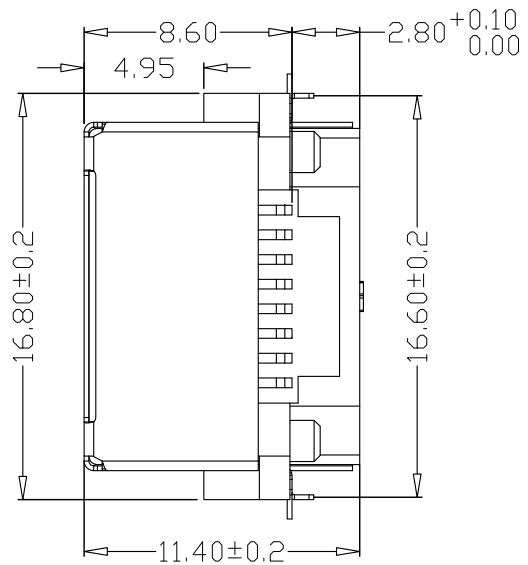
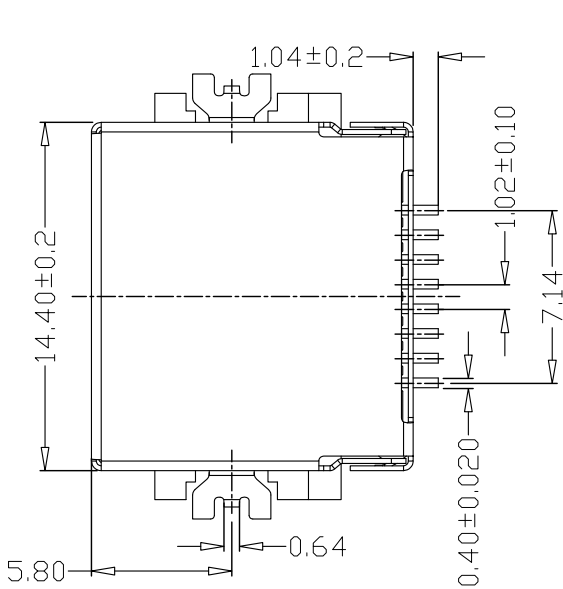


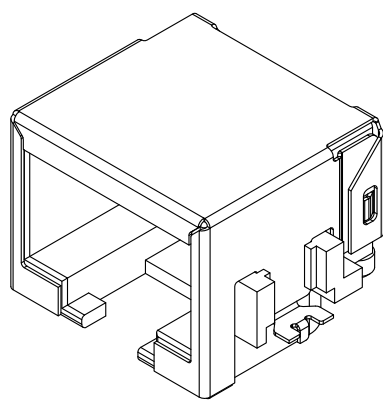

RECOMMENDED P.C.B LAYOUT
Tolerance:±0.05

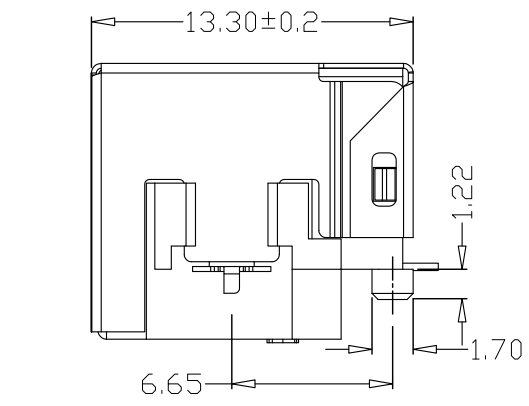

- 备注:
- 1. 塑胶材料: 见表格;
 - 2. 毛边最大0.05mm;
 - 3. 未注R角最大0.15mm;
 - 4. 端子C5191-H T= 0.30
半金锡, 镍底50-80U", 锡100-120U"镀金普通U"
 - 5. 铜壳:C2680-H, T=0.20±0.01mm. 镀镍30-50U"

5	1060-208033	RJ45 8P8C 全包沉板SMT式 H=8.6	PA9T WHITE(白)
4	1060-208032	RJ45 8P8C 全包沉板SMT式 H=8.6	PA9T Orange(橙)
3	1060-208031	RJ45 8P8C 全包沉板SMT式 H=8.6	PA9T Yellow(黄)
2	1060-208026	RJ45 8P8C 全包沉板SMT式 H=8.6 卷装	LCP BLACK(黑)
1	1060-208001	RJ45 8P8C 全包沉板SMT式 H=8.6	LCP BLACK(黑)
N0.	PART NUMBER	NAME	DESCRIPTION

MM
(INCH)

公差: TOLERANCES

MM
.0 ± 0.20
.00 ± 0.15
.000 ± 0.075

MM
±
±
±

角度 (ANGLES) ± 1.5°

第三角视图

绘图: MIN-D2013/07.10
(Designed)

审核:
(Checked)

批准:
(Approved)

材料: SEE NOTES
(Material)

比例: 1:1
(SCALE)

东莞市鹏辉电子有限公司
PengHui Electronics Co.,Ltd

系列 (SERIES)
RJ

名称 (NAME)
RJ45单颗 全包 H8.6(13.9)

图号 (DWG NO.):
料号 (PART NO): SEE TABLE

单位 (UNIT): MM
共 (SHEET) 1 页
第 (OF) 1 页

版本 REV.
A2