


78L08

■ Three-Terminal Positive Voltage Regulator

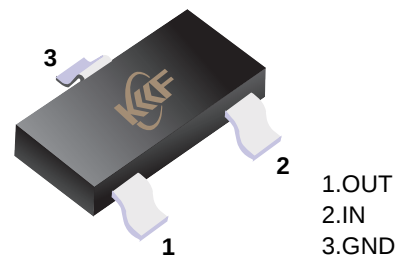

■ Simplified outline(SOT-23)

■ Features

- Maximum Output current I_o : 0.1A
- Output Voltage V_o : 8V
- Continuous Total Dissipation P_D : 0.35W ($T_a = 25^\circ\text{C}$)


■ Absolute Maximum Ratings (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Rating	Unit
Input Voltage	V_i	30	V
Operating Junction Temperature Range	T_{OPR}	$-55 \sim +125$	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	$-55 \sim +150$	$^\circ\text{C}$

■ Electrical Characteristics ($V_i=14\text{V}$, $I_o=40\text{mA}$, $C_i=0.33\mu\text{F}$, $C_o=0.1\mu\text{F}$, unless otherwise specified)


Parameter	Symbol	Testconditons	Min	Typ	Max	Unit
Output Voltage	V_o	$T_J = 25^\circ\text{C}$	7.7	8.0	8.3	V
		$T_J = 0 \sim 125^\circ\text{C}$, $10.5\text{V} \leq V_i \leq 23\text{V}$, $I_o=1\text{mA} \sim 40\text{mA}$	7.6	8.0	8.4	V
		$T_J = 0 \sim 125^\circ\text{C}$, $I_o=1\text{mA} \sim 70\text{mA}$	7.6	8.0	8.4	V
Load Regulation	ΔV_o	$T_J = 25^\circ\text{C}$, $I_o=1\text{mA} \sim 100\text{mA}$		18	80	mV
		$T_J = 25^\circ\text{C}$, $I_o=1\text{mA} \sim 40\text{mA}$		10	40	mV
Line Regulation	ΔV_o	$T_J = 25^\circ\text{C}$, $10.5\text{V} \leq V_i \leq 23\text{V}$		42	175	mV
		$T_J = 25^\circ\text{C}$, $11\text{V} \leq V_i \leq 23\text{V}$		36	125	mV
Quiescent Current	I_q	$T_J = 25^\circ\text{C}$		4	6	mA
Quiescent current Change	ΔI_q	$T_J = 0 \sim 125^\circ\text{C}$, $11\text{V} \leq V_i \leq 23\text{V}$			1.5	mA
		$T_J = 0 \sim 125^\circ\text{C}$, $1\text{mA} \leq I_o \leq 40\text{mA}$			0.1	mA
Output Noise Voltage	V_N	$T_J = 25^\circ\text{C}$, $10\text{Hz} \leq f \leq 100\text{KHz}$		54		μV
Ripple Rejection	RR	$T_J = 0 \sim 125^\circ\text{C}$, $13\text{V} \leq V_i \leq 23\text{V}$, $f = 120\text{Hz}$	37	46		dB
Dropout Voltage	V_D	$T_J = 25^\circ\text{C}$		1.7		V

■ Typical Application

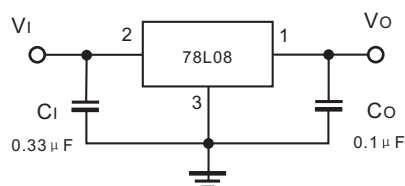


Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.


■ Typical Characteristics

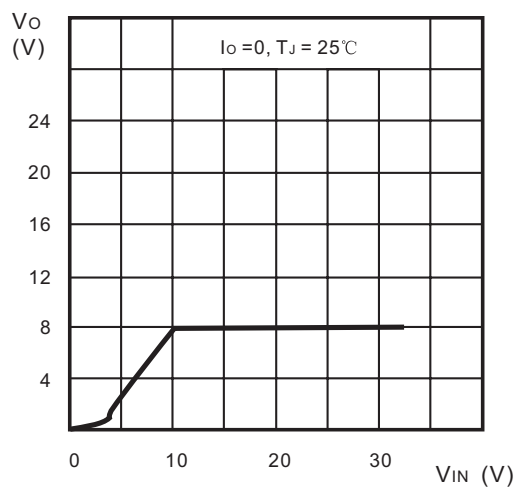


Output Characteristics

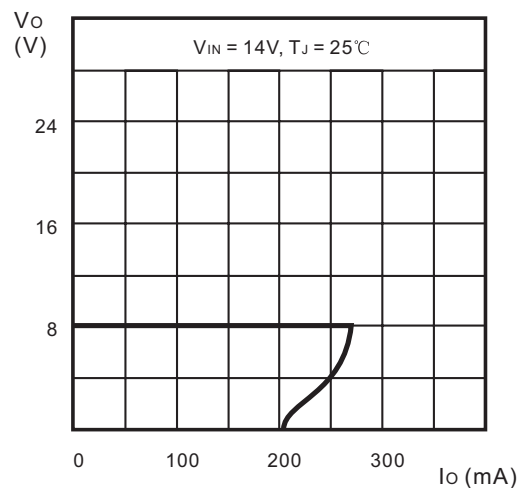

Load Characteristics

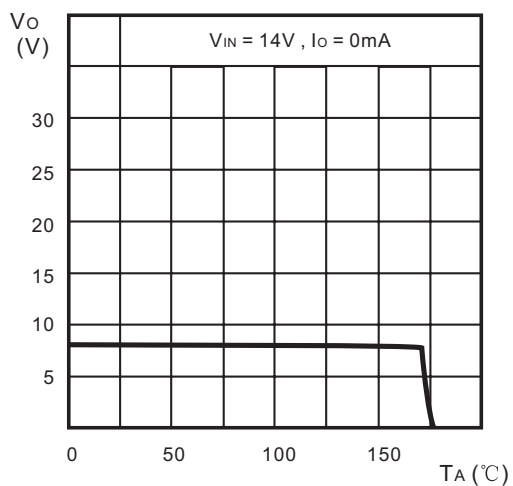


Thermal Shutdown

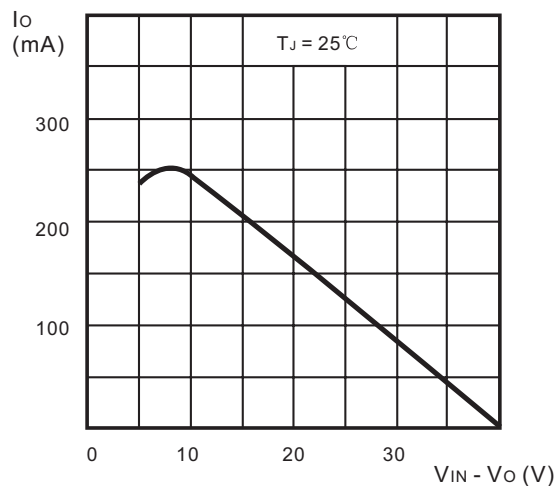

Short Circuit Output Current

■ SOT-23

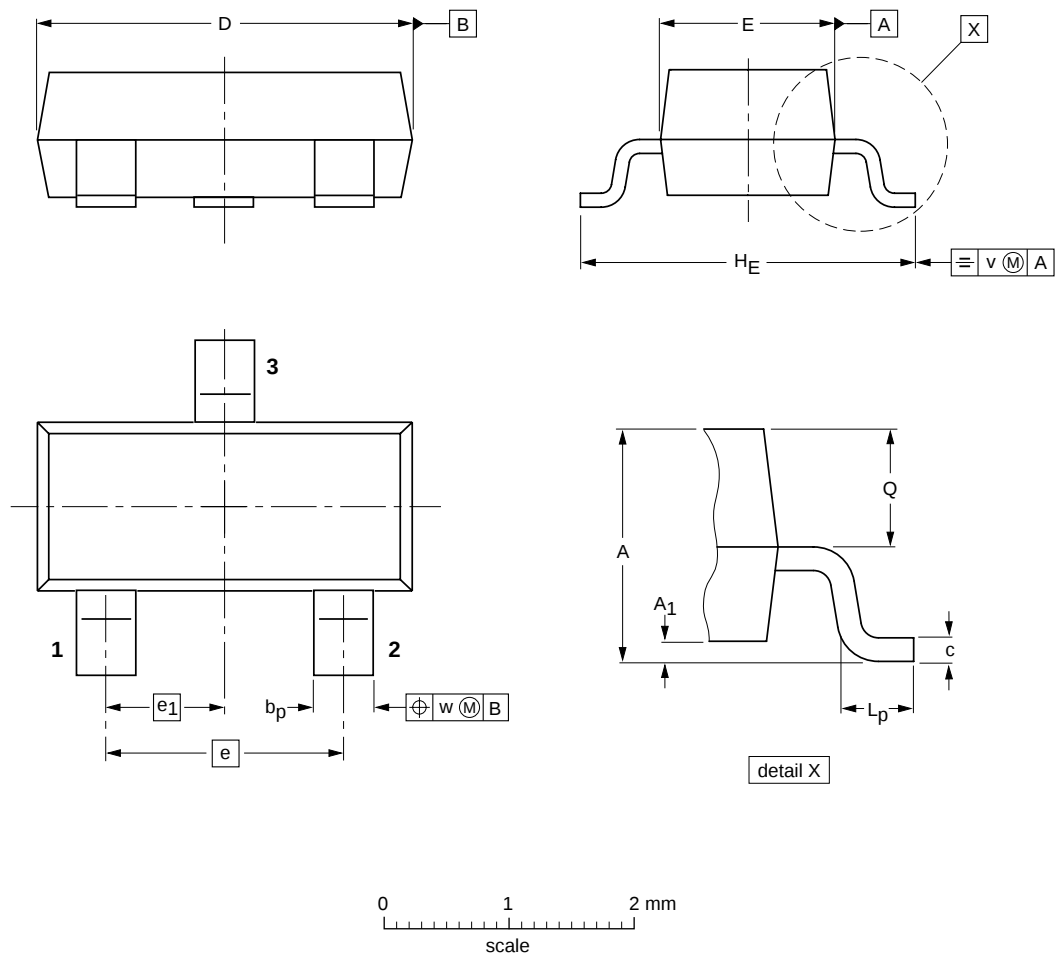

DIMENSIONS (mm are the original dimensions)

UNIT	A	A ₁ max.	b _p	c	D	E	e	e ₁	H _E	L _p	Q	v	w
mm	1.1 0.9	0.1	0.48 0.38	0.15 0.09	3.0 2.8	1.4 1.2	1.9	0.95	2.5 2.1	0.45 0.15	0.55 0.45	0.2	0.1