


P-Channel 20V (D-S) MOSFET

GENERAL DESCRIPTION

The ME2305 is the P-Channel logic enhancement mode power field effect transistors are produced using high cell density, DMOS trench technology. This high density process is especially tailored to minimize on-state resistance. These devices are particularly suited for low voltage application such as cellular phone and notebook computer power management and other battery powered circuits where high-side switching, and low in-line power loss are needed in a very small outline surface mount package.

PIN CONFIGURATION

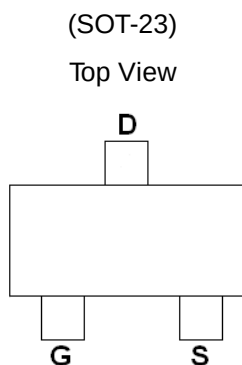


FEATURES

- $R_{DS(ON)} \leq 62m\Omega @ V_{GS} = -10V$
- $R_{DS(ON)} \leq 72m\Omega @ V_{GS} = -4.5V$
- $R_{DS(ON)} \leq 91m\Omega @ V_{GS} = -2.5V$
- $R_{DS(ON)} \leq 120m\Omega @ V_{GS} = -1.8V$
- Super high density cell design for extremely low $R_{DS(ON)}$
- Exceptional on-resistance and maximum DC current capability

APPLICATIONS

- Power Management in Note book
- Portable Equipment
- Battery Powered System
- DC/DC Converter
- Load Switch
- DSC
- LCD Display inverter



P-Channel MOSFET

Ordering Information: ME2305 (Pb-free)

ME2305-G (Green product-Halogen free)

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$ Unless Otherwise Noted)

Parameter		Symbol	Maximum Ratings	Unit
Drain-Source Voltage		V_{DS}	-20	V
Gate-Source Voltage		V_{GS}	± 8	V
Continuous Drain Current	$T_A = 25^\circ\text{C}$	I_D	-4	A
	$T_A = 70^\circ\text{C}$		-3.1	
Pulsed Drain Current		I_{DM}	-15	A
Maximum Power Dissipation	$T_A = 25^\circ\text{C}$	P_D	1.4	W
	$T_A = 70^\circ\text{C}$		0.9	
Operating Junction Temperature		T_J	-55 to 150	$^\circ\text{C}$
Thermal Resistance-Junction to Ambient*		$R_{\theta JA}$	90	$^\circ\text{C/W}$

*The device mounted on 1in^2 FR4 board with 2 oz copper

DCC
正式發行

P-Channel 20V (D-S) MOSFET

Electrical Characteristics (T_A=25°C Unless Otherwise Specified)

Symbol	Parameter	Limit	Min	Typ	Max	Unit
STATIC						
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =-250 μA	-0.4		-1.0	V
I _{GSS}	Gate Leakage Current	V _{DS} =0V, V _{GS} =±8V			±100	nA
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =-20V, V _{GS} =0V			-1	μA
R _{DS(ON)}	Drain-Source On-State Resistance ^a	V _{GS} =-10V, I _D = -4.2A		52	62	mΩ
		V _{GS} =-4.5V, I _D = -3.4A		60	72	
		V _{GS} =-2.5V, I _D = -2.5A		70	91	
		V _{GS} =-1.8V, I _D = -1.7A		90	120	
V _{SD}	Diode Forward Voltage	I _S =-1.2A, V _{GS} =0V		-0.8		V
DYNAMIC						
Q _g	Total Gate Charge	V _{DS} =-15V, V _{GS} =-10V, I _D =-4.2A		20		nC
Q _g	Total Gate Charge	V _{DS} =-15V, V _{GS} =-4.5V, I _D =-4.2A		10		
Q _{gs}	Gate-Source Charge			2.8		
Q _{gd}	Gate-Drain Charge			2.5		
C _{iss}	Input capacitance	V _{DS} =-15V, V _{GS} =0V, f=1MHz		745		pF
C _{oss}	Output Capacitance			65		
C _{rss}	Reverse Transfer Capacitance			21		
t _{d(on)}	Turn-On Delay Time	V _{DD} =-15V, R _L =15Ω V _{GEN} =-10V, R _G =6Ω		32		ns
t _r	Turn-On Rise Time			18		
t _{d(off)}	Turn-Off Delay Time			57		
t _f	Turn-Off Fall Time			4.5		







Notes: a. Pulse test: pulse width ≤ 300μs, duty cycle ≤ 2%, Guaranteed by design, not subject to production testing.

b. Matsuki Electric/ Force mos reserves the right to improve product design, functions and reliability without notice.

DCC
正式發行





P-Channel 20V (D-S) MOSFET

Typical Characteristics (T_J = 25°C Noted)

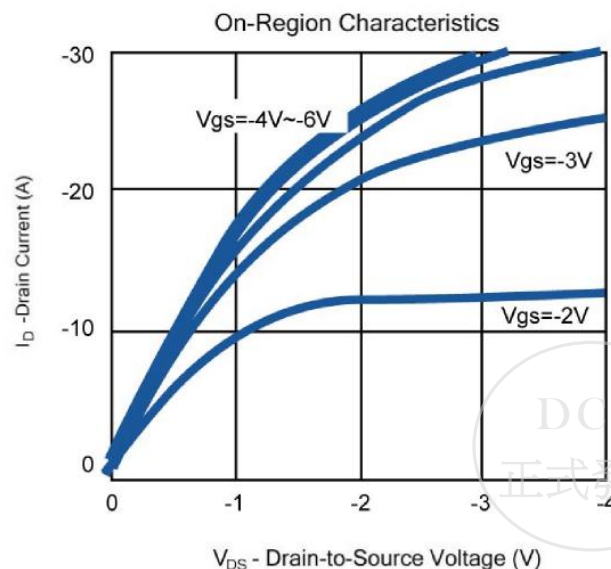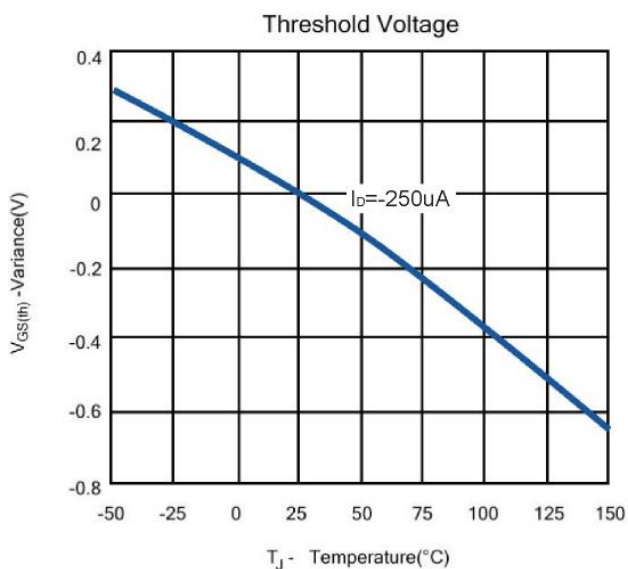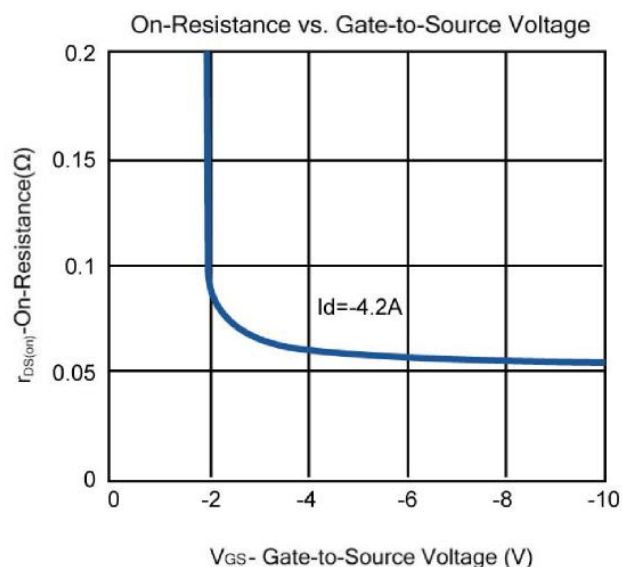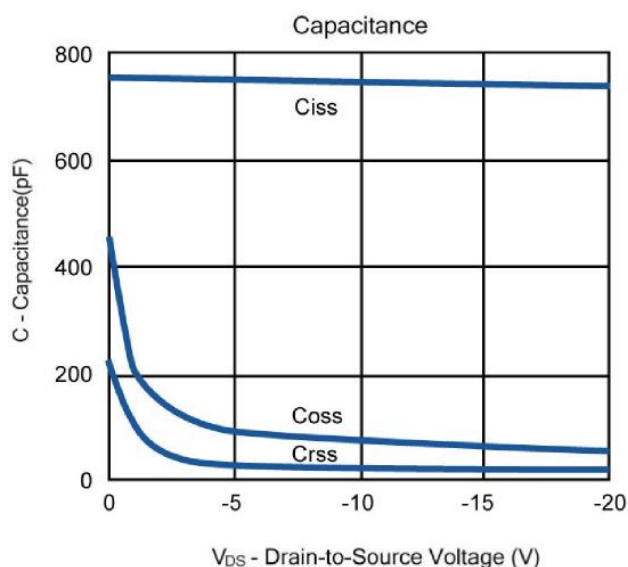
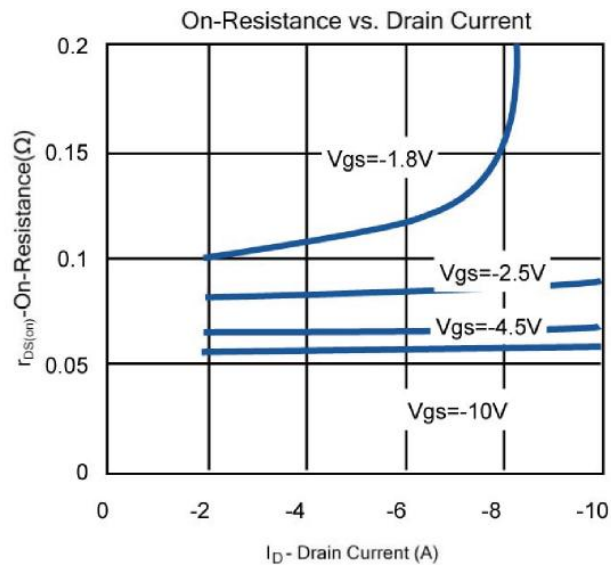
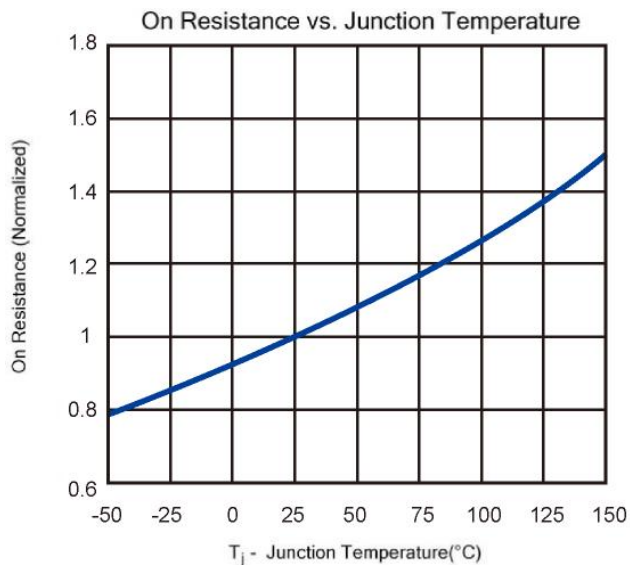


P-Channel 20V (D-S) MOSFET

Typical Characteristics (T_J = 25°C Noted)

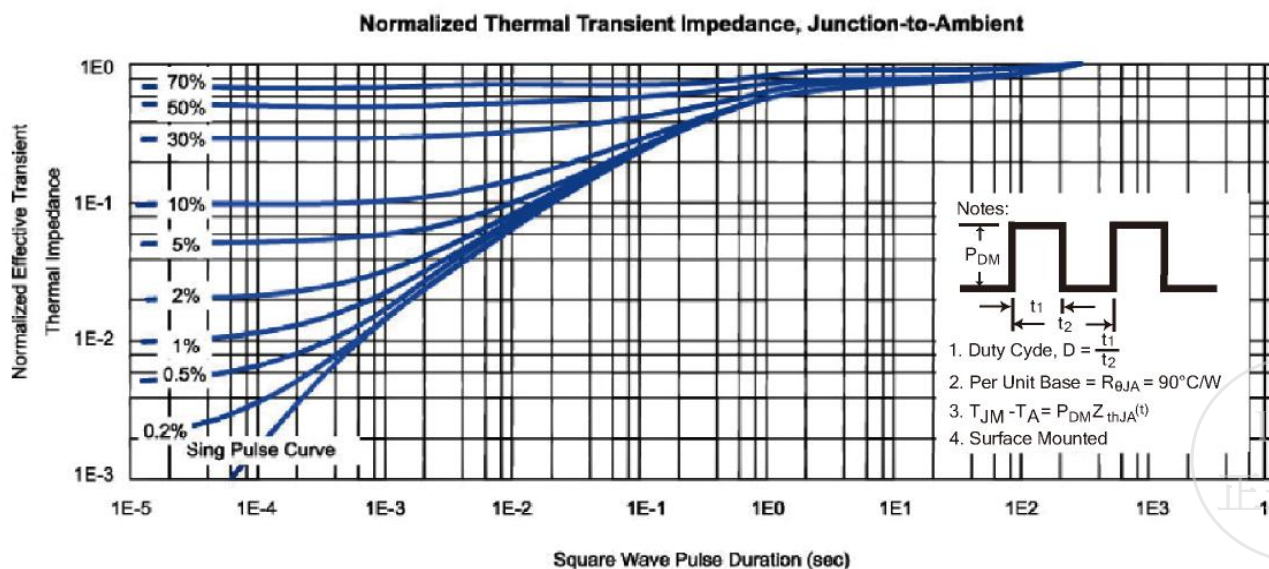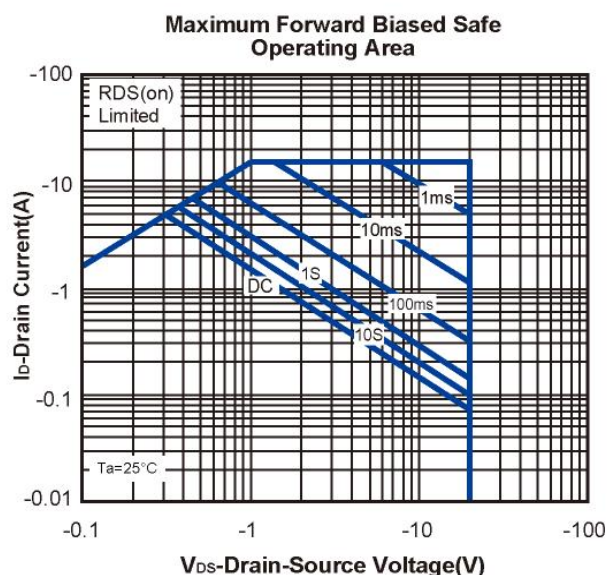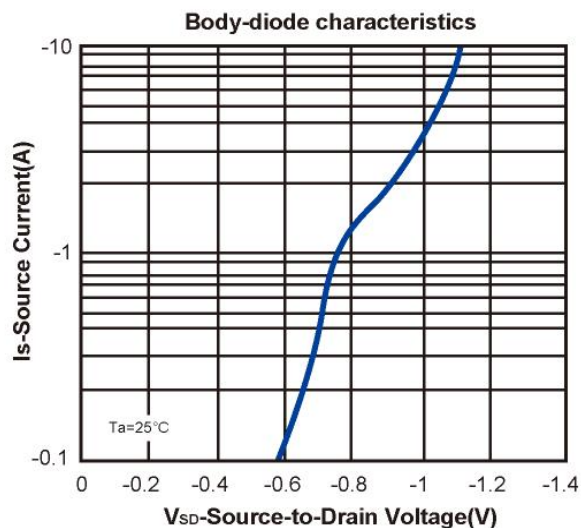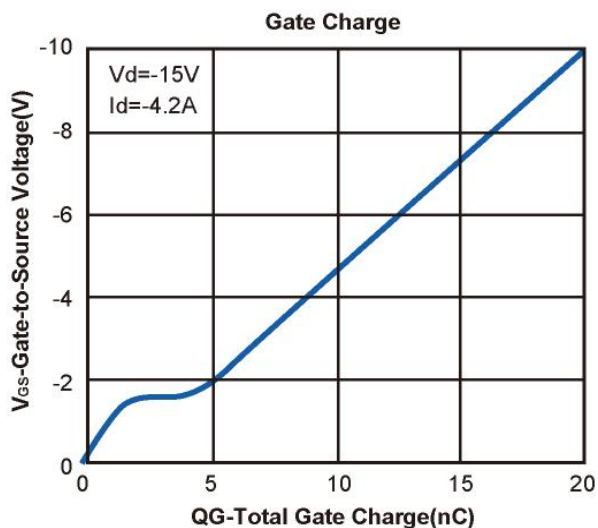

SOT-23 Package Outline

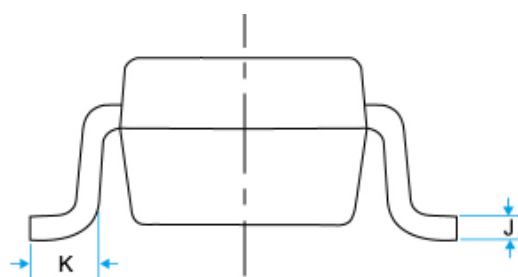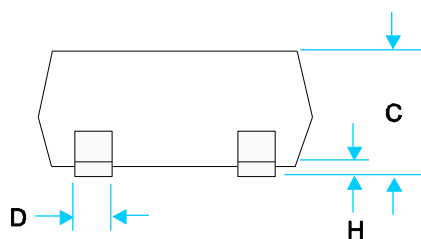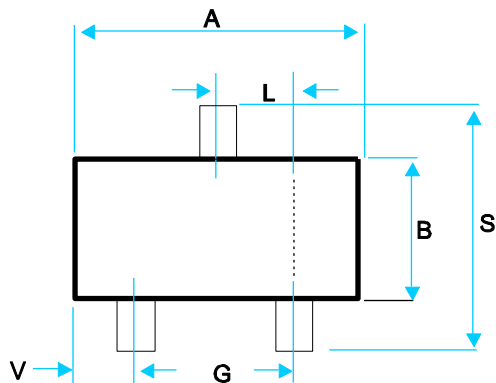

DIM	MILLIMETERS (mm)	
	MIN	MAX
A	2.800	3.00
B	1.200	1.70
C	0.900	1.30
D	0.350	0.50
G	1.780	2.04
H	0.010	0.15
J	0.085	0.20
K	0.300	0.65
L	0.890	1.02
S	2.100	3.00
V	0.450	0.60

DCC
正式發行