

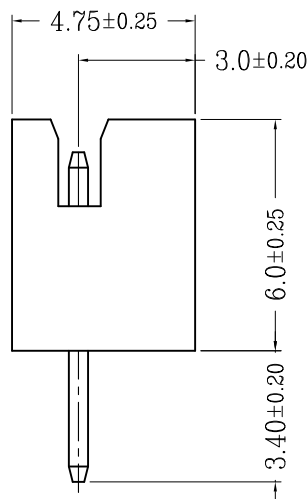
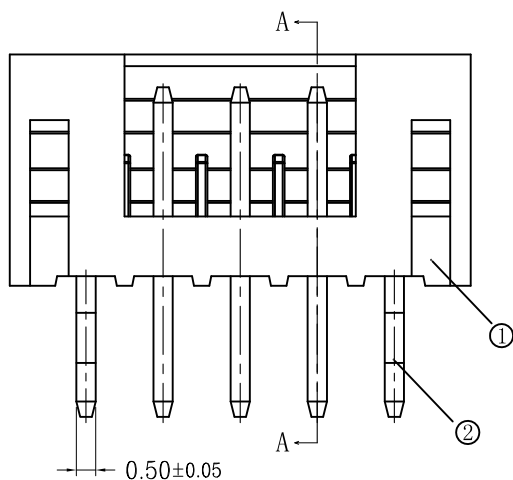
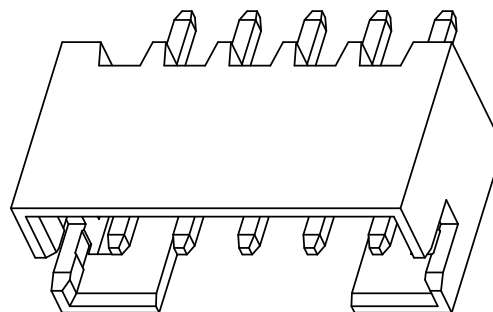



序号	品名	材质
①	PH2.0弯针WTB胶芯	米色 PA66 UL94V-0 白色 红色
②	PH2.0直针WTB端子	铜合金/表面镀锡

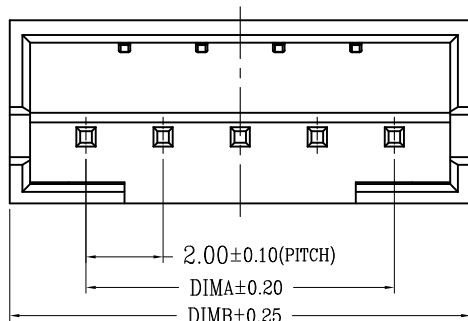


TYPE 1(无K脚)

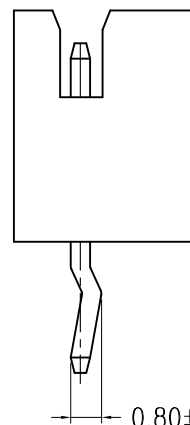

TYPE 2(打K脚)

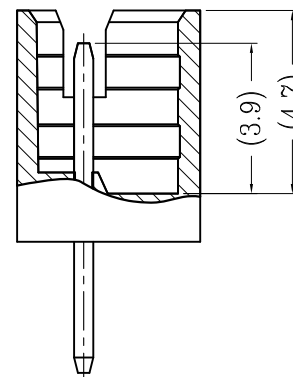

SECTION A-A

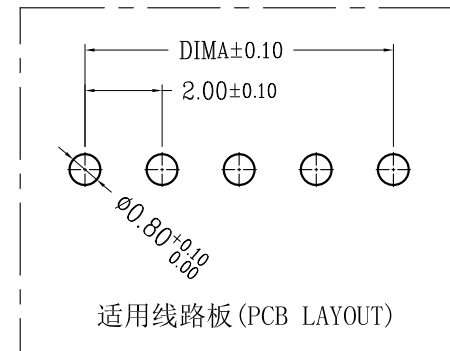

CKT	A	B	CKT	A	B
2	2.0	6.0	12	22.0	26.0
3	4.0	8.0	13	24.0	28.0
4	6.0	10.0	14	26.0	30.0
5	8.0	12.0	15	28.0	32.0
6	10.0	14.0	16	30.0	34.0
7	12.0	16.0	17	32.0	36.0
8	14.0	18.0	18	34.0	38.0
9	16.0	20.0	19	36.0	40.0
10	18.0	22.0	20	38.0	42.0
11	20.0	24.0			

技术指标(Technical Index):

1. 工作温度(Temperature range): $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$.
2. 额定电压(Rated voltage): 250V DC/AC(rms).
3. 额定电流(Rated current): 2.0A AC, DC.
4. 接触电阻(Contact resistance): $\leq 25\text{m}\Omega$.
5. 耐压值(Withstanding voltage): 500V AC/minute.
6. 绝缘电阻(Insulation resistance): $\geq 1000\text{M}\Omega$.

NO:	PARTICULR	BY	DATE
REVISIONS			
1			
2			
3			
4			
5			
6			
7			
8			
9			

MODEL: PH2.0-FZ-nP		DRAWN BY : <i>Leiqin</i>		DATE:		GENERAL TOLERANCE: (UNLESS SPECIFIED) X. ±0.30mm X.* ± 3° X.X ±0.25mm X.X* ± 2° X.XX ±0.20mm X.XX* ± 1° X.XXX±0.10mm X.XXX* ± 0.5°
TITLE : 针座2.0		CHECKED BY : <i>Liwei</i>		DATE:		
DRAWING NO:	REV. : A	APPROVED BY: <i>Wuxin</i>		DATE:		
SHEET: 1 OF 1	SCALE: 3:1	SIZE: A4	UNIT : mm			
 深圳市吉威电子有限公司 SZJUSTWELL ELECTRONICS CO., LTD						MEASURE POINT: QUADRANT POINT (QP) TANGENCY POINT (TP) INTERSECTION POINT (IP)



深圳市吉威电子有限公司
SZJUSTWELL ELECTRONICS CO., LTD