

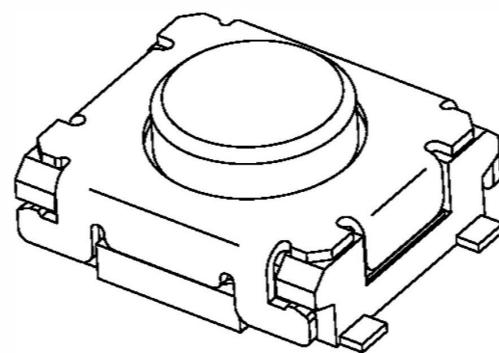
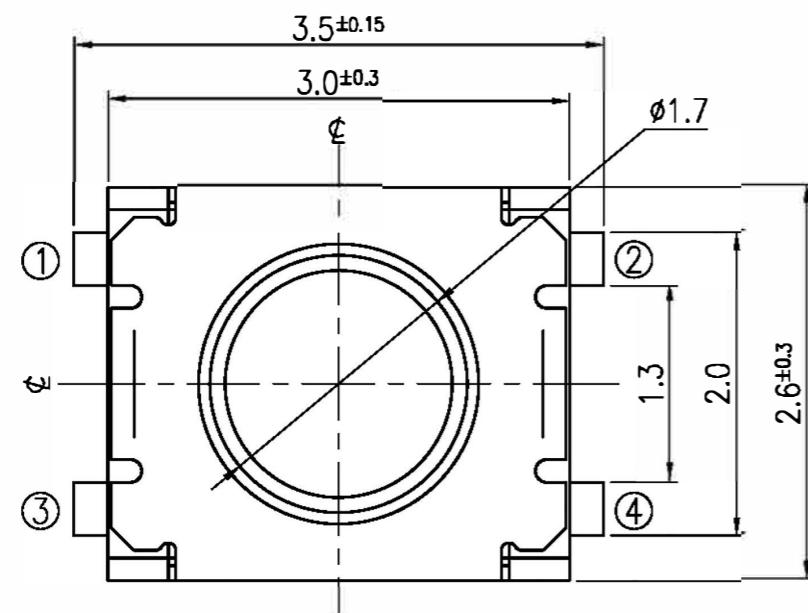
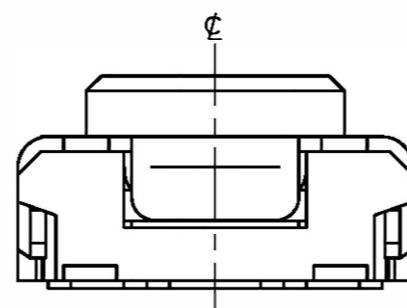


RoHS Compliant


For Reference Only

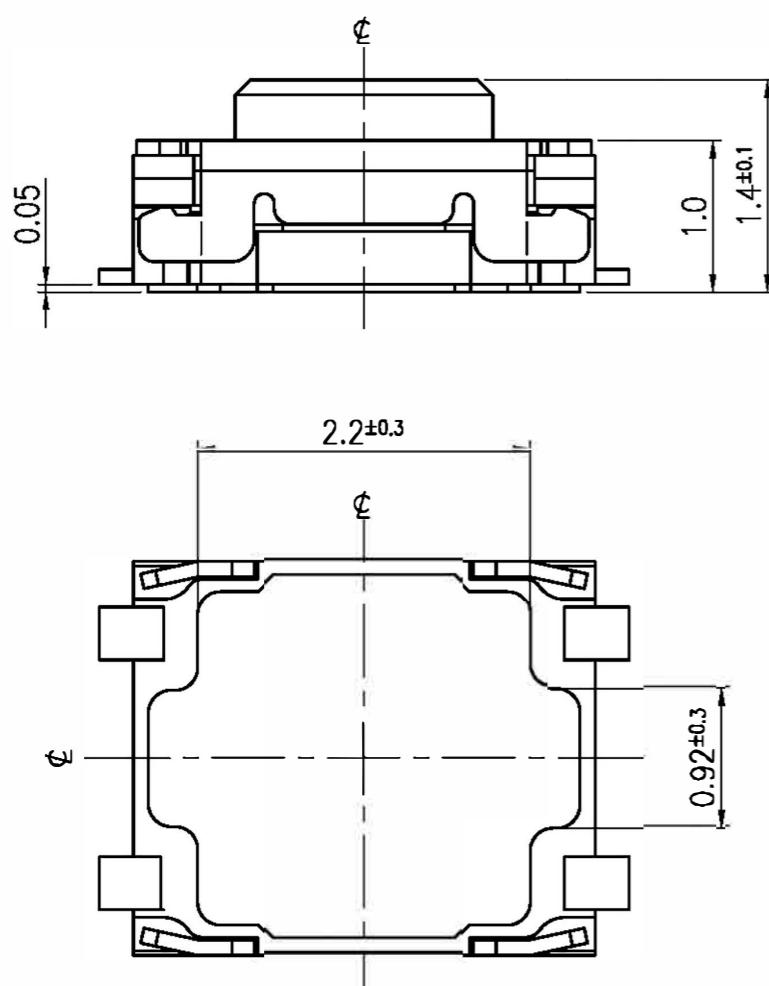

REVISI		REVISI	
Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2012.09.12	Catherine Lee
B			
SPECIFICATIONS			
RATING	DC12V 50mA.	TIMING	
CONTACT RESISTANCE	100mΩ MAX.	OPERATION (TORQUE)	450 ± 80gf
INSULATION RESISTANCE	DC500V - 100MΩ MIN.	STROKE (ANGLE)	0.15 ± 0.1 mm
WITHSTAND VOLTAGE	AC250V - 1 MINUTE.	CONTACT RESISTANCE	2Ω MAX.
REMARKS:	(AFTER 100,000 CYCLES LIFE TEST)		

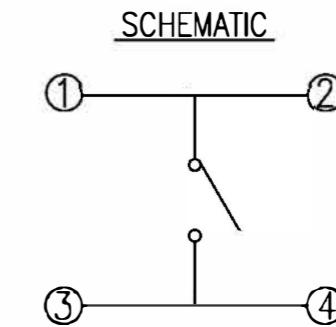


P.C.B MOUNTING FACE

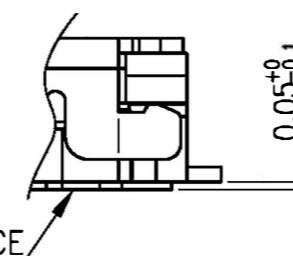

TERMINALS DETAIL

P.C.B MOUNTING PLAN

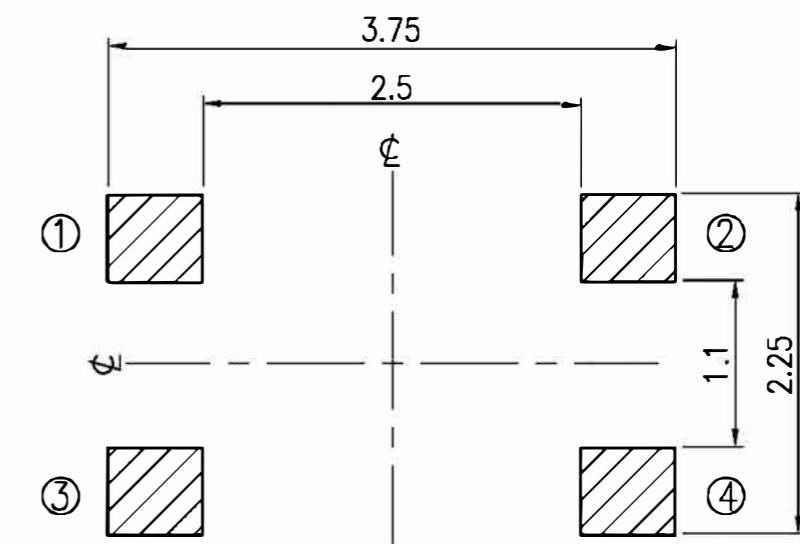

HATCHED AREA SHOWS SOLDERING LAND


TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.1			SIGNATURES	DATE	MODEL
DRAWER	Catherine Lee	2012.09.12	TITLE		
CHECKED			TACT SWITCH		
	UNIT mm	SCALE 20/1	REVIEWED		NO.
			APPROVALS		ETC021-AA1G-A450T

TAIWAN MISAKI ELECTRONICS CO., LTD.

THE PACKING SPECIFICATIONS


RoHS Compliant

1. STRUCTURE AND MATERIALS

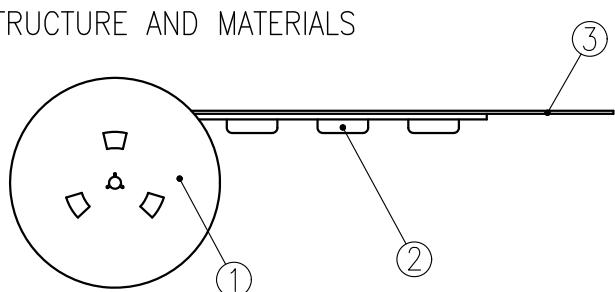

NO.	PARTS NAME	MATERIALS
③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE

- PACKAGING QUANTITY : 4,500 PCS/REEL
- MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.
- SHORTAGE LESS THAN 10 PCS A REEL IS ACCEPTABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.
- STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 70 gf AND STRIPPING ANGLE SHOULD BE WITHIN $165^\circ \sim 180^\circ$.
- THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.
- TAPE AND REEL PER EIA-481.
- DIMENSIONS :

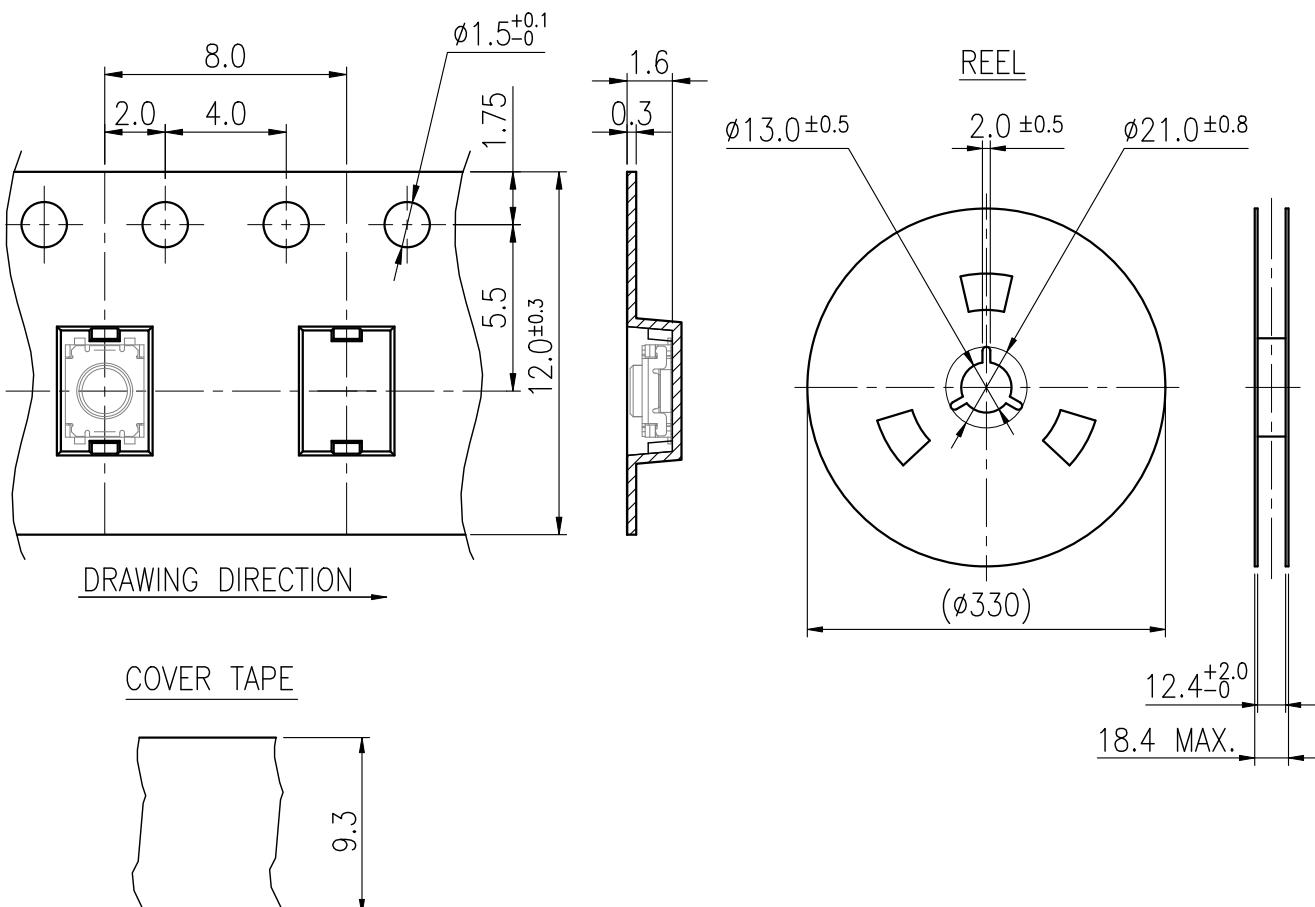

SYM	DESCRIPTION	DATE	APPROVED	APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
				Dennis Hung 2012.05.15			Catherine Lee 2012.05.15	NTC021-AA1G-A400T
								PAGINATE. 1/1
								SPEC NO. P-705