
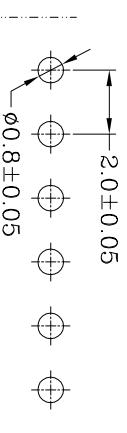
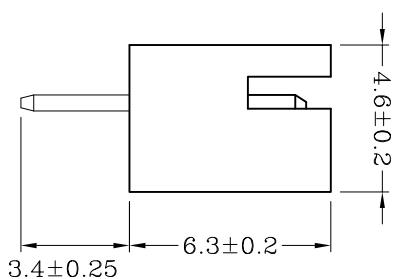


■ 技术参数 SPECIFICATIONS

- ◆ 适用线规: AWG#30~#24
- ◆ Applicable Wire: AWG#30~#24
- ◆ 额定电压: 100V DC,AC(rms)
- ◆ Rated voltage: 100V DC,AC(rms)
- ◆ 额定电流: 2A (AWG #24)
- ◆ Rated Current: 2A (AWG #24)
- ◆ 耐压值: 800V AC/minute
- ◆ 工作温度: -25°C ~ +85°C
- ◆ Working Temp : -25°C ~ +85°C
- ◆ 绝缘电阻: ≥1000 MΩ
- ◆ Insulation resistance: ≥1000 MΩ
- ◆ 接触电阻: ≤10mΩ
- ◆ Contact resistance: ≤10mΩ

■ 材料 MATERIAL

◆ Housings: Nylon66, UL94-V0

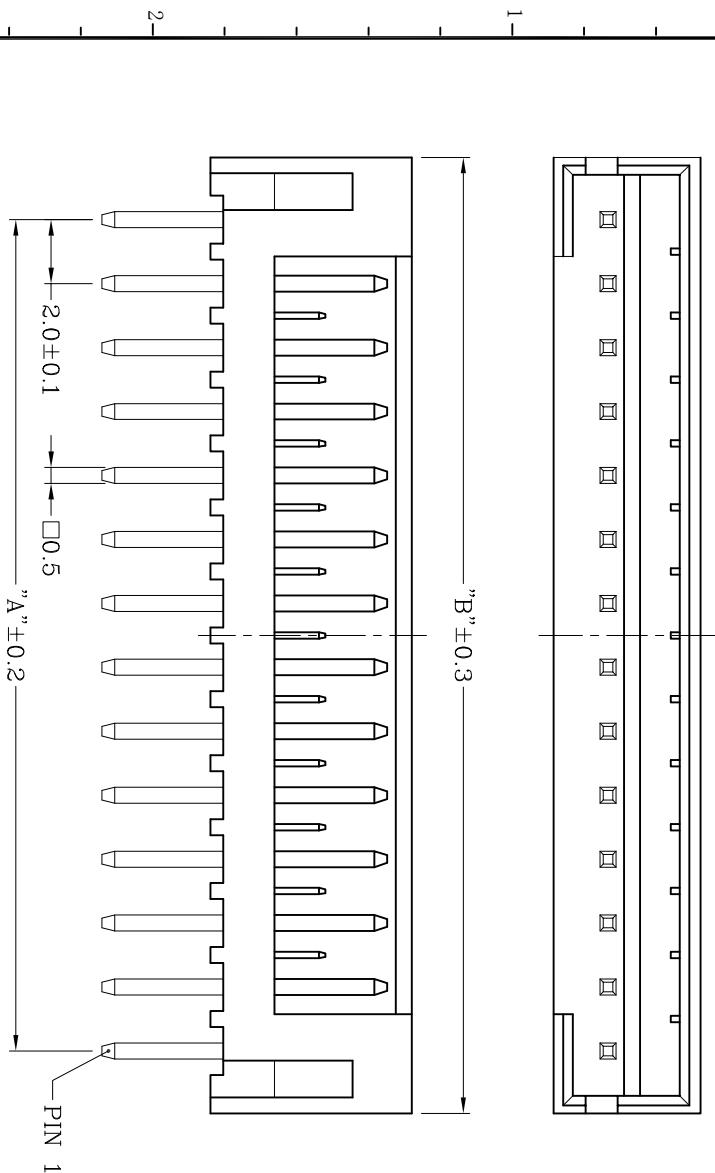

P.C.B LAYOUT

Poles	2	3	4	5	6	7	8
DIM.A	2.00	4.00	6.00	8.00	10.00	12.00	14.00
DIM.B	5.90	7.90	9.90	11.90	13.90	15.90	17.90

Poles	9	10	11	12	13	14	15	16
DIM.A	16.00	18.00	20.00	22.00	24.00	26.00	28.00	30.00
DIM.B	19.90	21.90	23.90	25.90	27.90	29.90	31.90	33.90

KKG

GENERAL TOLERANCE SCALE: 4.5:1

DRAWN:

DATE:

DWG. NO. :

E:\DWG\Production\PH2.0

TITLE:

A

CHECK:

DATE:

PARTS NO. :

成品图

APPROVE:

DATE:

PH2.0-NA

SHEET:

1/1

A

B

C

D

E

3

2

1