
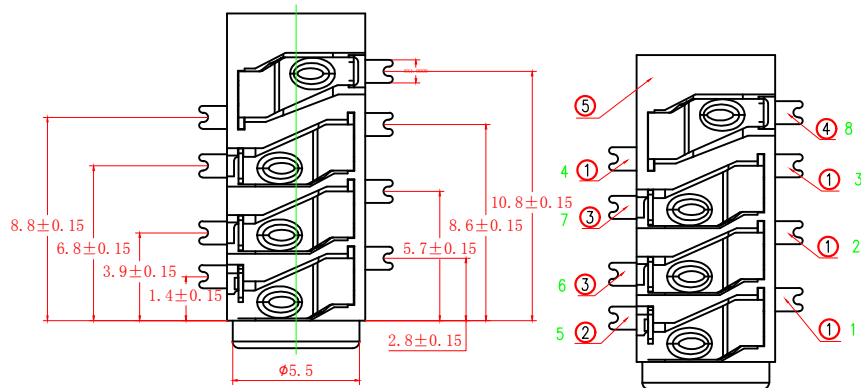
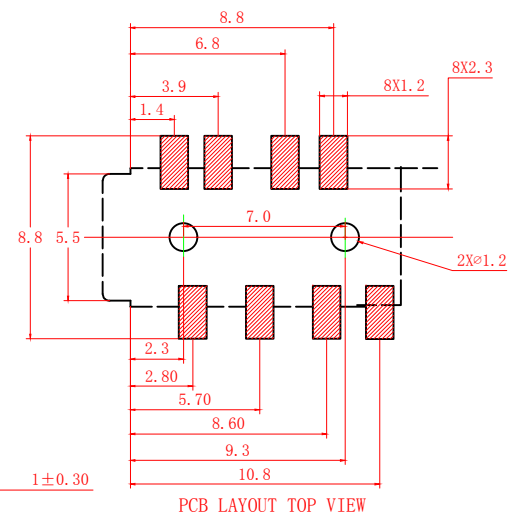


CIRCUIT DIAGRAM

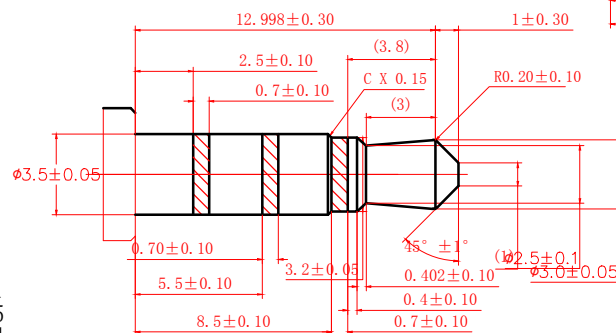

PCB LAYOUT TOP VIEW

SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M \Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.

No.	PART NAME	QTY	MATERIAL (THICK, COLOR)	REMARK
①	HOUSING KKG-PJ-393-L3	1	PA9T (Black)	
②	TERMINAL KKG-PJ-393-4Q1S	1	PHOSPHOR BRONZE t=0.20	Ag-Plated
③	TERMINAL KKG-PJ-393-3Q1S	2	PHOSPHOR BRONZE t=0.20	Ag-Plated
④	TERMINAL KKG-PJ-393-2Q1S	1	PHOSPHOR BRONZE t=0.20	Ag-Plated
⑤	TERMINAL KKG-PJ-393-1Q1S	4	PHOSPHOR BRONZE t=0.25	Ag-Plated



PART NO. KKG-PJ-393-8P

3.5 PHONE JACK

APPROVED BY	SCALE	UNIT	TOLERANCE	LTR	NAME	DATE	LTR	REVISION RECORD	NAME	DATE
JOHNNY		mm	.0 ±0.30	△	LUCKY	08/14/09	△			
CHECKED BY	PROJ	VER NO.	.00 ±0.20	△			△			
JAY	① ②	A3	.000 ±0.10	△			△			
DRAWN BY	DATE	SIZE	ANGLE	△				CUSTOMER		
ANGUS		A4	0° ±1°	△						
			.0° ±	△				Conforms to The RoHS Instruction		
			SHEET 1/1	△						