



RoHS
Compliant



ZONE	E C N . N O .	DESCRIPTION	DRAWING	DATE
A		INITIAL	林生财	2023.10.19



NOTES

1. CURRENT RATING: 0.5A/DC 12V.
2. CONTACT RESISTANCE: 50mΩ MAX.
3. INSULATION RESISTANCE: 100MΩ MIN.
4. DIELECTRIC WITHSTANDING: 500V AC MIN.
5. DURABILITY: 5000 CYCLES MIN.
6. CONNECTOR MATING FORCES: 3~30N.
7. CONNECTOR UNMATING FORCES: 3~30N.
8. SALT SPRAY: 24HOUR
9. WATERPROOF LEVEL: IP67.
10. OPERATING TEMPERATURE: -25°C TO +85°C.

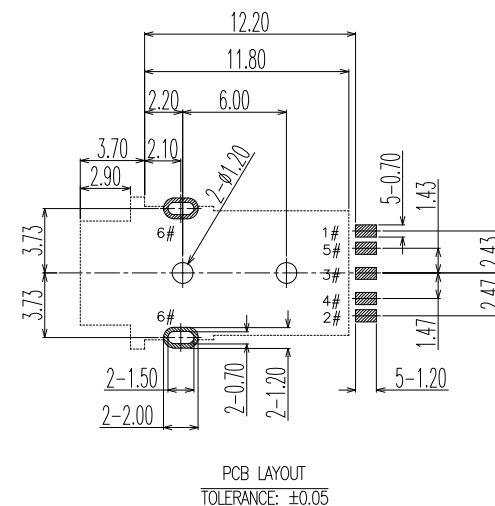

PCB LAYOUT
TOLERANCE: ±0.05

⑨	GLUE	1	EPOXY; BLACK
⑧	COVER	1	HIGH TEMPERATURE PLASTICS; BLACK
⑦	HOUSING	1	HIGH TEMPERATURE PLASTICS; BLACK
⑥	TERMINAL 6#	1	PHOSPHOR BRONZE; NICKEL UNDERPLATING OVERALL, Sn(BRIGHT) PLATING
⑤	TERMINAL 5#	1	PHOSPHOR BRONZE; NICKEL UNDERPLATING OVERALL, GOLD FLASH PLATING
④	TERMINAL 4#	1	PHOSPHOR BRONZE; NICKEL UNDERPLATING OVERALL, GOLD FLASH PLATING
③	TERMINAL 3#	1	PHOSPHOR BRONZE; NICKEL UNDERPLATING OVERALL, GOLD FLASH PLATING
②	TERMINAL 2#	1	PHOSPHOR BRONZE; NICKEL UNDERPLATING OVERALL, GOLD FLASH PLATING
①	TERMINAL 1#	1	PHOSPHOR BRONZE; NICKEL UNDERPLATING OVERALL, GOLD FLASH PLATING
ITEM	NAME	Q'TY	DESCRIPTION

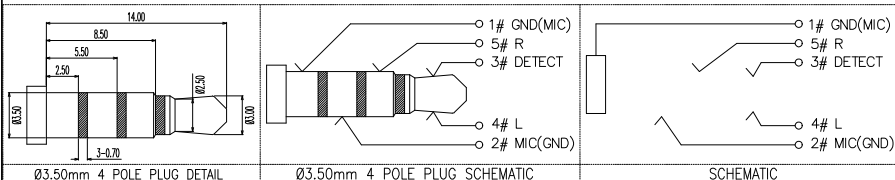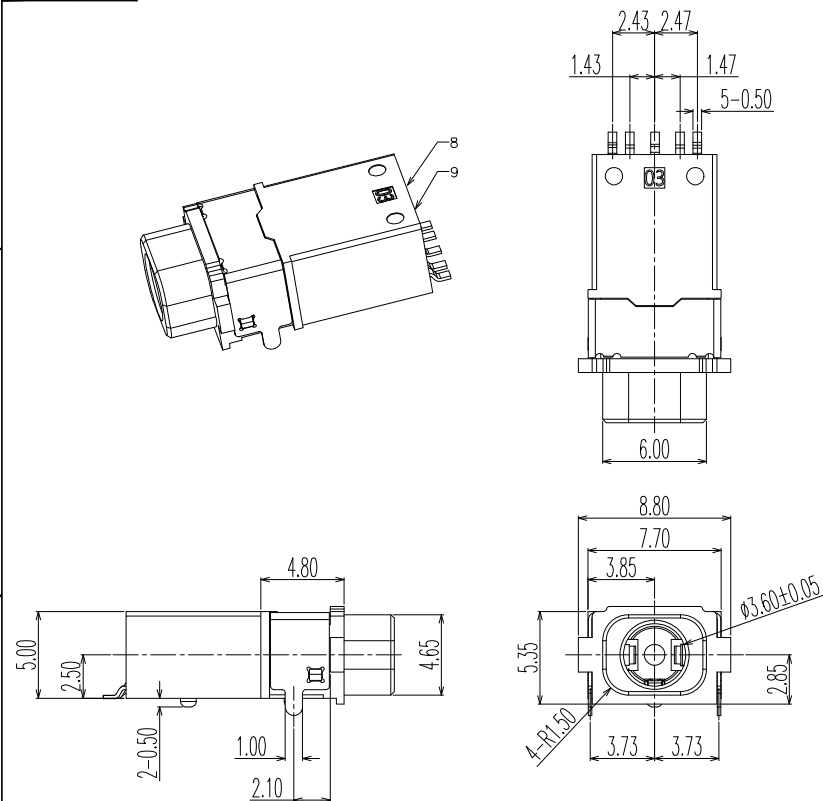

DRAWING:	林生财	DATE:	2023.10.19	SCALE	1:1
CHECK:	李宏鑫	DATE:	2023.10.19	MATERIAL	*
APPROVAL:	杨进宝	DATE:	2023.10.19	DWG. NO.	
DRAWING NO.	PJ-9339-F R1.5			SHEET	1/1

PART NAME	WATERPROOF Ø3.5 PHONE JACK	TOLERANCE UNLESS	0.0±0.25	0.°±2°	UNIT:	
PART NO.	PJ-9339-F	OTHERWISE SPECIFIED:	0.00±0.15	0.0°±1°	mm	
			0.000±0.10	0.00°±0.5°		