


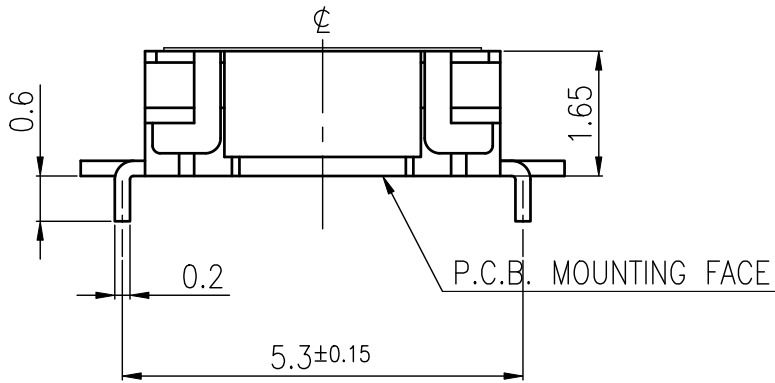
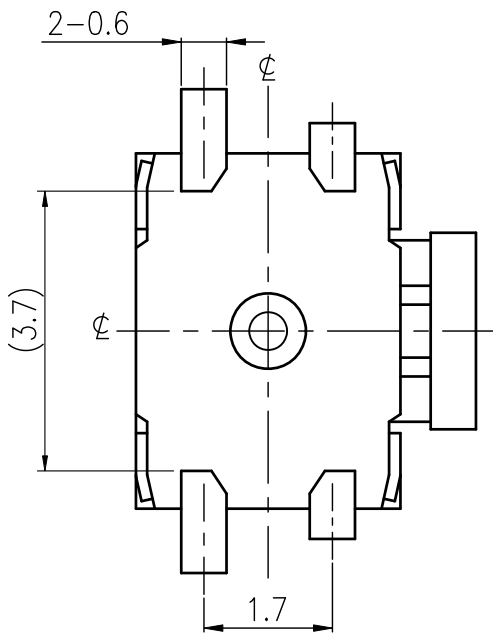
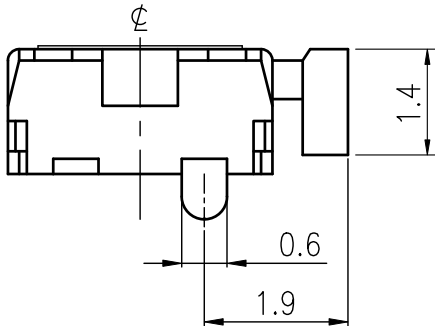


RoHS Compliant

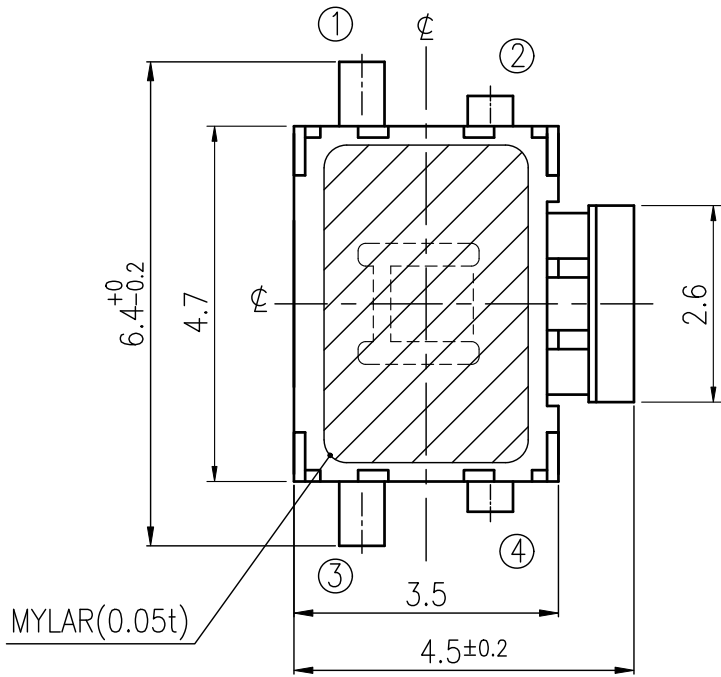


P.C.B MOUNTING PLAN

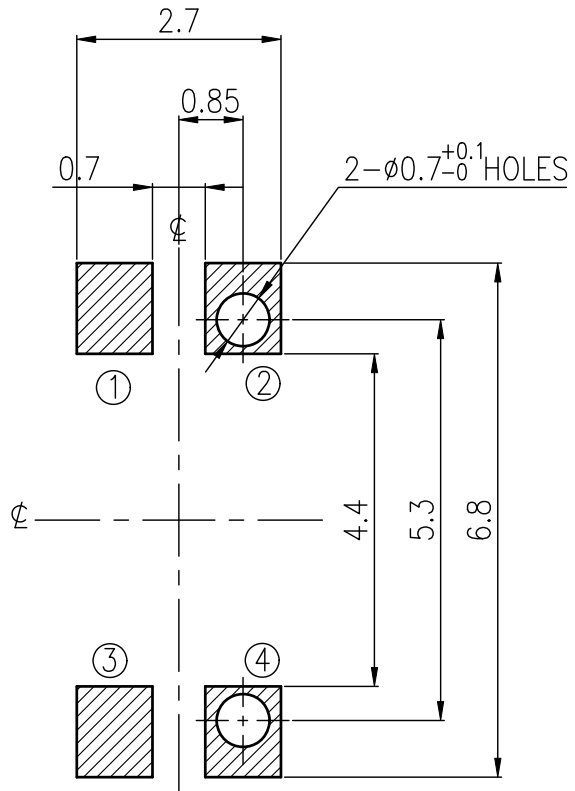

HATCHED AREA SHOWS SOLDERING LAND

REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2016.07.01	Jane Shen	C			
B				D			
SPECIFICATIONS							
RATING		DC12V 50mA		TIMING			
CONTACT RESISTANCE		100mΩ MAX.		OPERATION (TORQUE)		180±50gf	
INSULATION RESISTANCE		DC500V–100MΩ MIN.		STROKE (ANGLE)		0.25±0.1mm	
WITHSTAND VOLTAGE		AC250V– MINUTE		CONTACT RESISTANCE		1 Ω MAX.	
REMARKS:				(AFTER 100,000 CYCLES LIFE TEST)			


TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.1			SIGNATURES		DATE	MODEL	
			DRAWER	Jane Shen	2016.07.01	TITLE TACT SWITCH	
			CHECKED				
	UNIT mm	SCALE 10/1	REVIEWED			NO. ETC316-AD1T-A180TX	
			APPROVALS <i>Dennis Hung</i>		2016.07.01		

TAIWAN MISAKI ELECTRONICS CO., LTD.

THE PACKING SPECIFICATIONS

RoHS Compliant



1.STRUCTURE AND MATERIALS

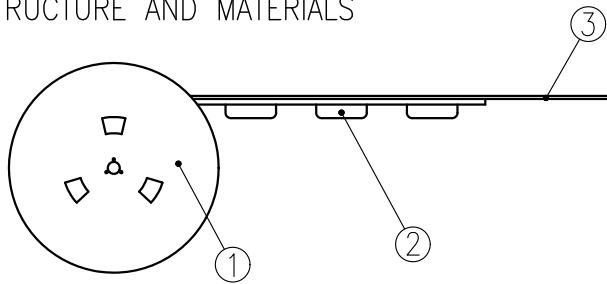

③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE
NO.	PARTS NAME	MATERIALS


- PACKAGING QUANTITY : 2,000 PCS/REEL
- MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.
- SHORTAGE LESS THAN 10 PCS A REEL IS ACCETABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.
- STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO **130** gf AND STRIPPING ANGLE SHOULD BE WITHIN 165° ~ 180 °.
- THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.
- TAPE AND REEL PER EIA-481
- DIMENSIONS :

CARRIER TAPE

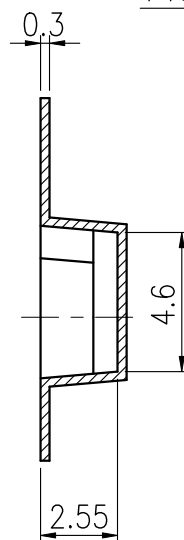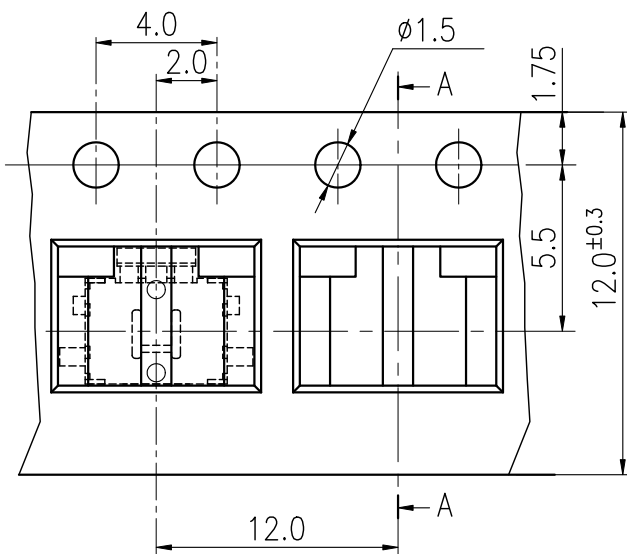


SECTION A A

REEL

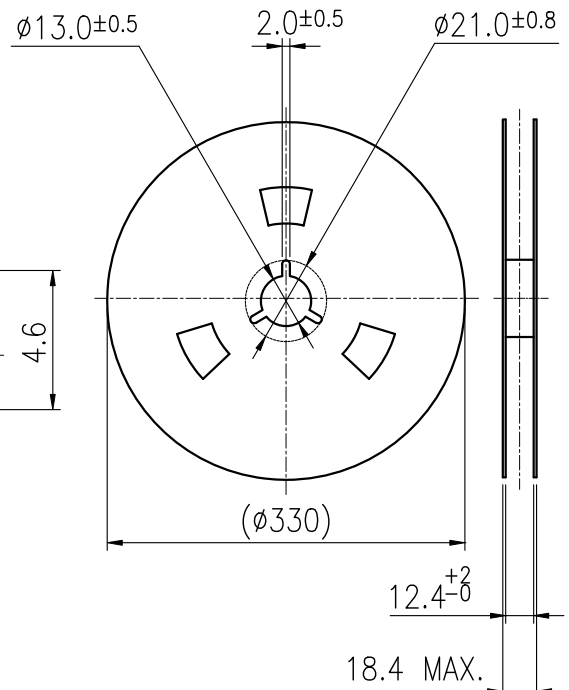

COVER TAPE



DRAWING DIRECTION →

				APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
								NTC316-AD1T-A
								PAGINATE.
								1/1
								SPEC NO.
								P-672
SYM	DISCRPTION	DATE	APPROVED					

TAIWAN MISAKI ELECTRONICS CO.,LTD.