
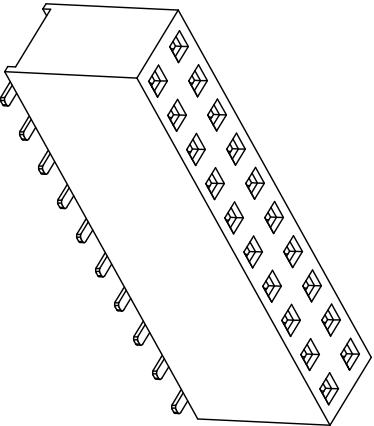




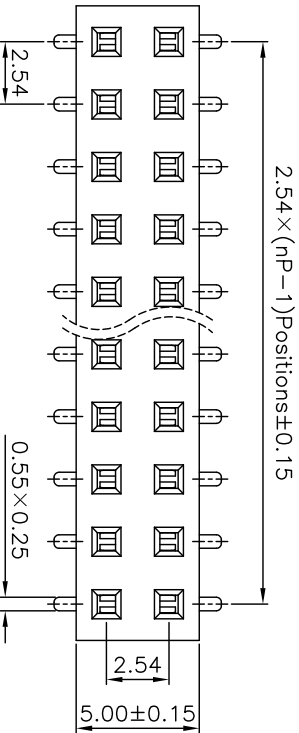


3D VIEW


SPECIFICATIONS

Rated Current : 3.0AMP
Contact Resistance : 20mΩ Max
Withstand Voltage : 500V AC/DC
Insulation Resistance : 1000MΩ Min
Operation Temperature : -40°C to +108°C

Contact Material : Brass
Contact Plating : Au or Sn Over Ni
Insulator Material : Polyester(UL94V-0)
Standard : PA6T
Max Processing Temp :
230°C for 5-10 seconds

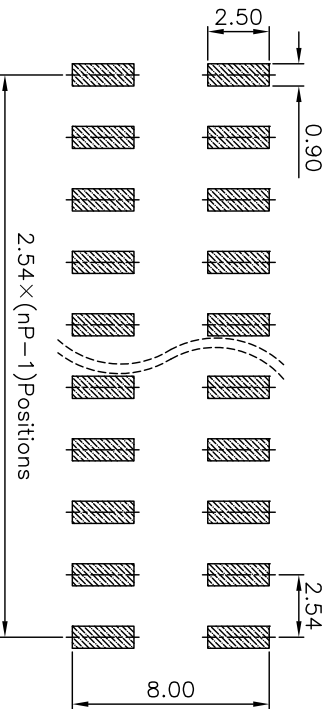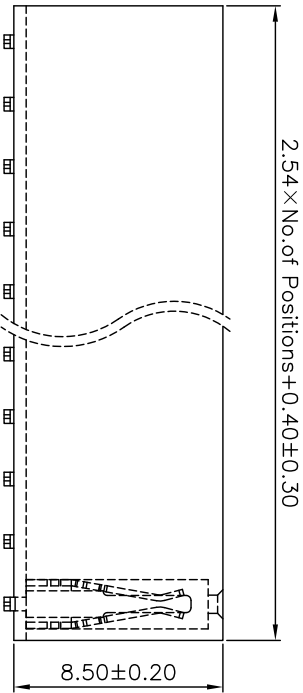

P.C.B LAYOUT

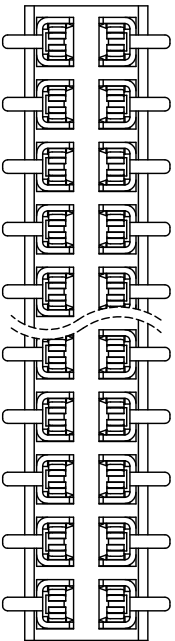

MODEL: F2.54S-8.5×5.0-2×nP	DRAWN BY : Leiqin	DATE:	GENERAL TOLERANCE: (UNLESS SPECIFIED)
TITLE : 2.54间距8.5高双排贴片排母	CHECKED BY : Liwei	DATE:	X. ±0.30mm X.* ± 3'
DRAWING NO:	REV. : A	DATE:	X.X ±0.25mm X.X* ± 2'
SHEET: 1 OF 1	APPROVED BY: Wuxin	DATE:	X.XX ±0.20mm X.XX* ± 1'
SCALE: 3:1	SIZE: A4	UNIT : mm	X.XXX±0.10mm X.XXX* ± 0.5'



深圳市吉威电子有限公司
深圳市元吉威电子有限公司

SZJUSTWELL

MEASURE POINT:
QUADRANT POINT (QP)
TANGENCY POINT (TP)
INTERSECTION POINT (IP)

NO:	PARTICULAR	BY	DATE
REVISIONS			

1

2

3

4

5

6

7

8

<http://www.szjustwell.com> 0755-33000755