




REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A	N/A		INITIAL RELEASE		

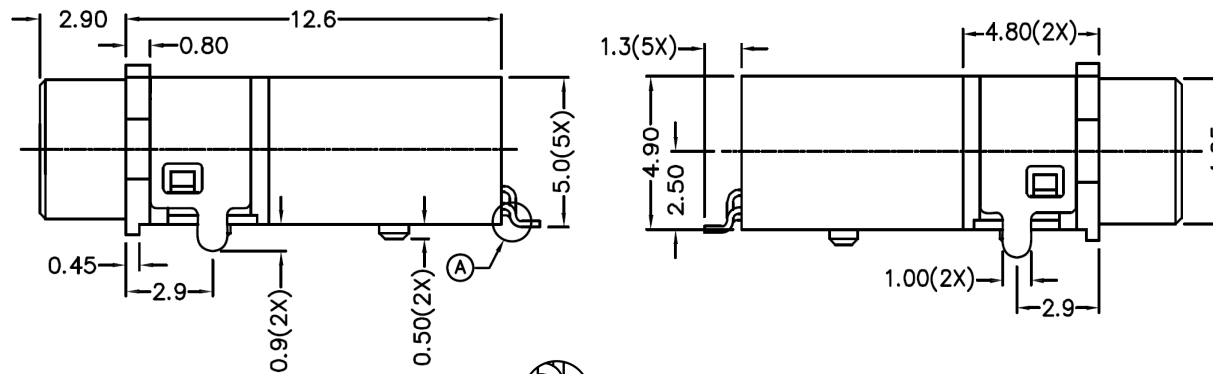



A DETAIL COPLANARITY

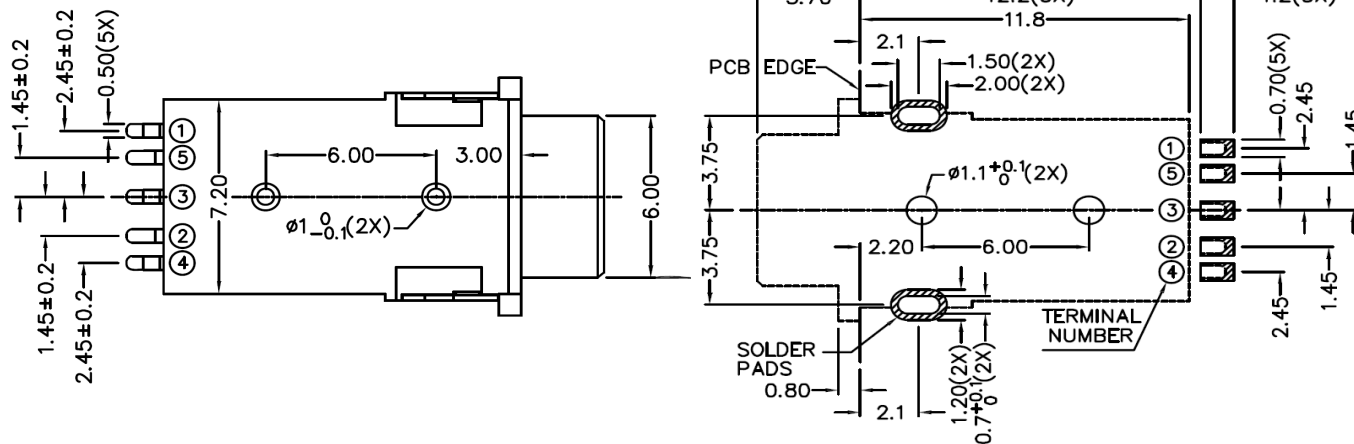

RECOMMEND PCB LAYOUT (TOP VIEW)

TOLERANCE: ±0.05

MATTER	RoHs (PPM)
Cd	≤ 100
Pb	≤ 1000
Hg	≤ 1000
Cr6+	≤ 1000
PBB	≤ 1000
PBDE	≤ 1000



UNLESS OTHERWISE STATED			
X.X	±0.25	mm	±0.5'
X.XX	±0.15	UNIT	mm
REV	A/01	SCALE	4:1
SIZE	A4	SHEET	1 OF 1



NOTES:

- 1.CONTACT CURRENT RATING:12V 1A.
2. CONTACT RESISTANCE: 50mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.500V DC;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 29.4N (3.00Kgf) MAX.;
7. CONNECTOR UNMATING FORCES: 2.94N(0.30Kgf) MIN.;
8. THE PRODUCT MACHINE WITH A GAP THAT:
THE FINISHED MACHINE WITH SOCKET BEFORE/
UP/DOWN/LEFT/RIGHT SIDE OF 5,PROTECTION GAP
FIRST PROPOSED THE DESING OF 0.15mm

9	BOND			
8	TERMINAL		Au PLATED	
7	COVER	HIGH TEMP	UL 94V-0	BLACK
6	HOUSING	HIGH TEMP	UL 94V-0	BLACK
5	TERMINAL 5	COPPER ALLOY	Au PLATED	
4	TERMINAL 4	COPPER ALLOY	Au PLATED	
3	TERMINAL 3	COPPER ALLOY	Au PLATED	
2	TERMINAL 2	COPPER ALLOY	Au PLATED	
1	TERMINAL 1	COPPER ALLOY	Au PLATED	
NO.	DESCRIPTION	MATERIAL	REMARK	COLOR



DONGGUAN YANGHAN INDUSTRIAL CO.,LTD

DRAWN	DATE	TITLE	03.5mm Waterproof Jack
OUXH	2012.12.14	MODEL	PJ-9339
CHK'D DATE		REV.:	A
APP'VD DATE		SCALE:	1:1
SIZE:	A4	SHEET:	1/2