

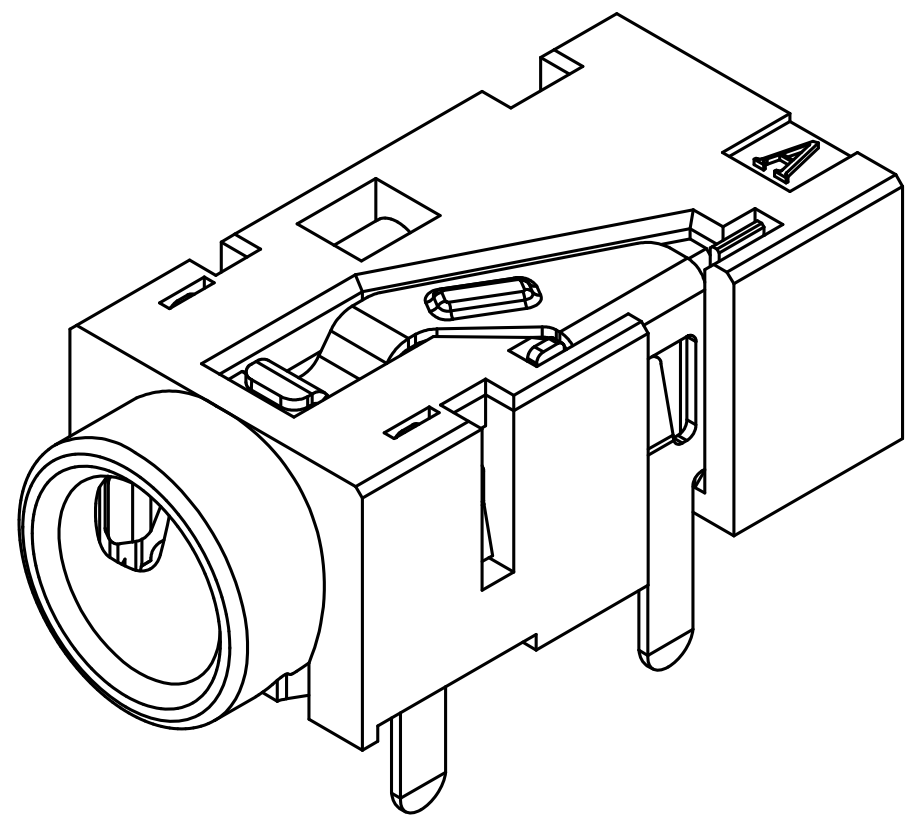
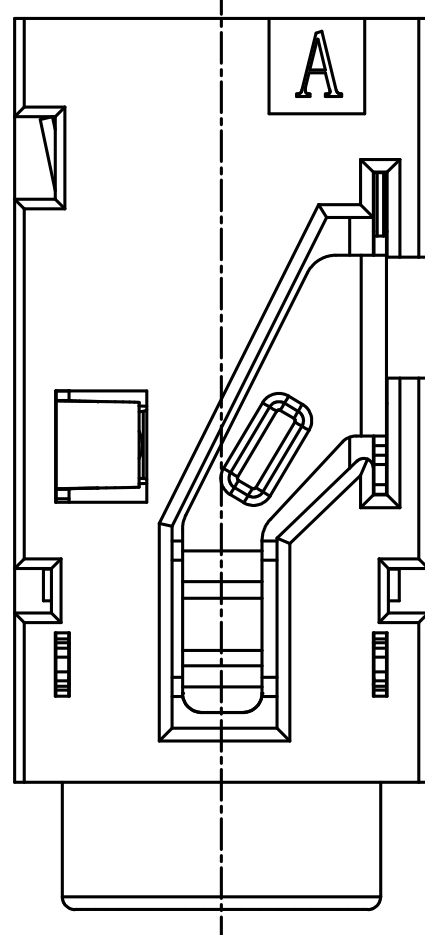
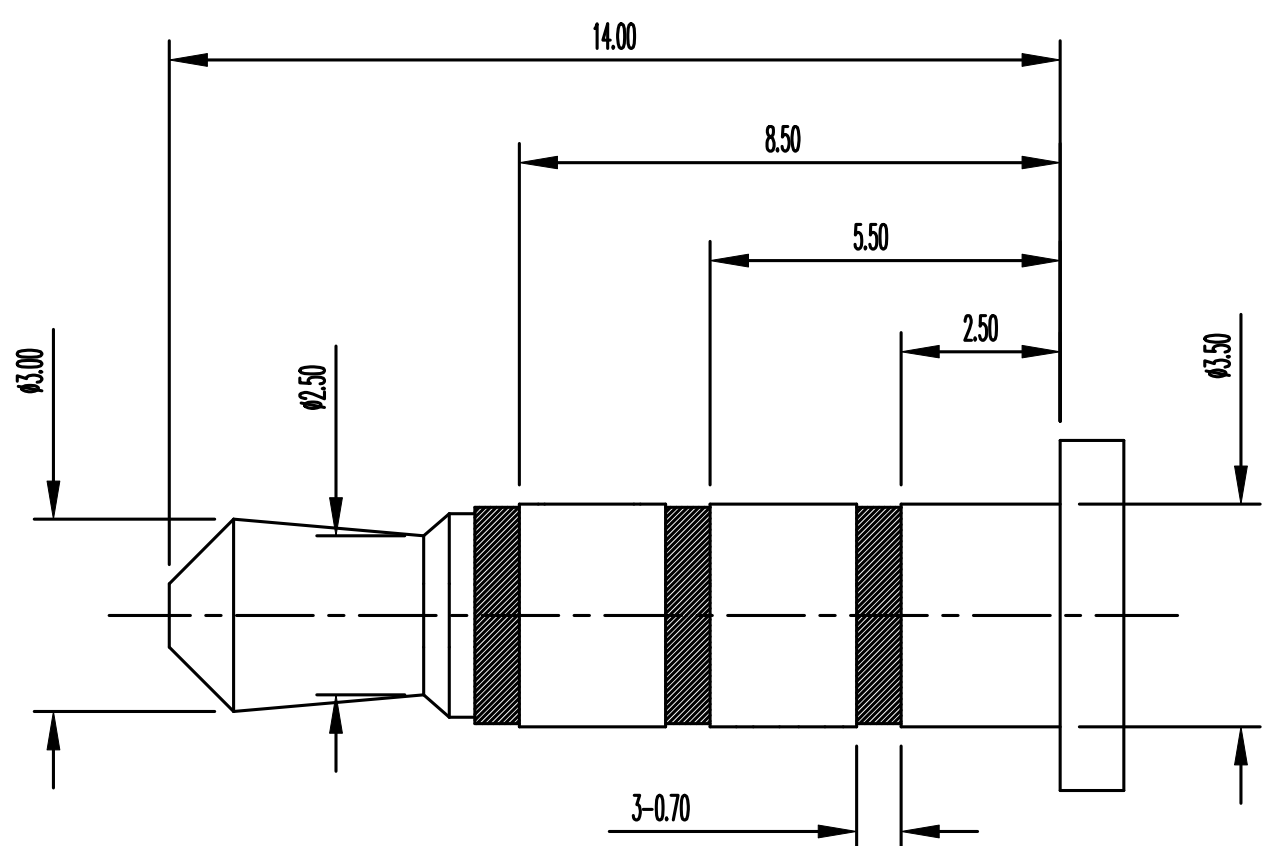
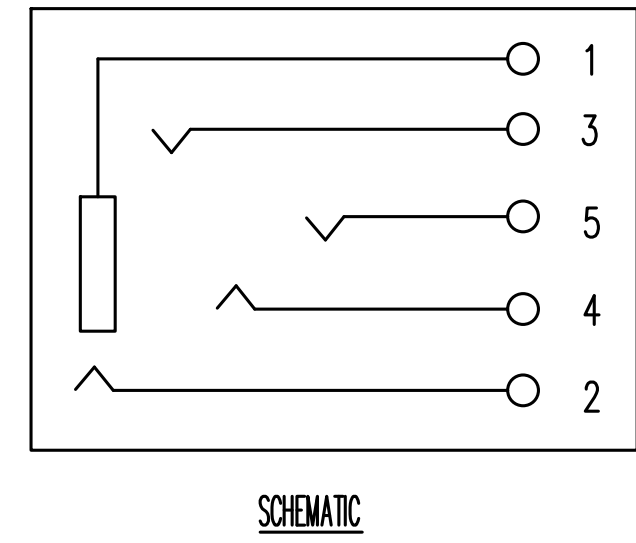
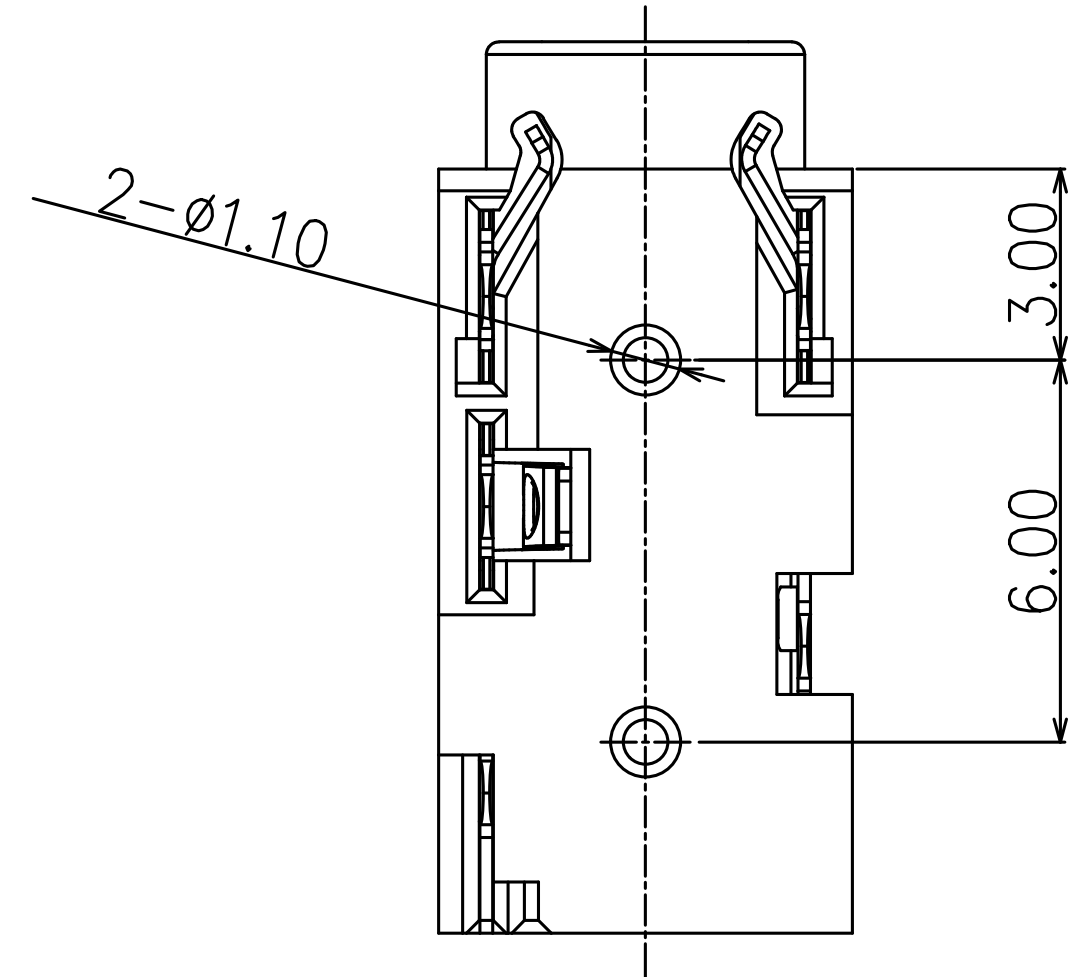
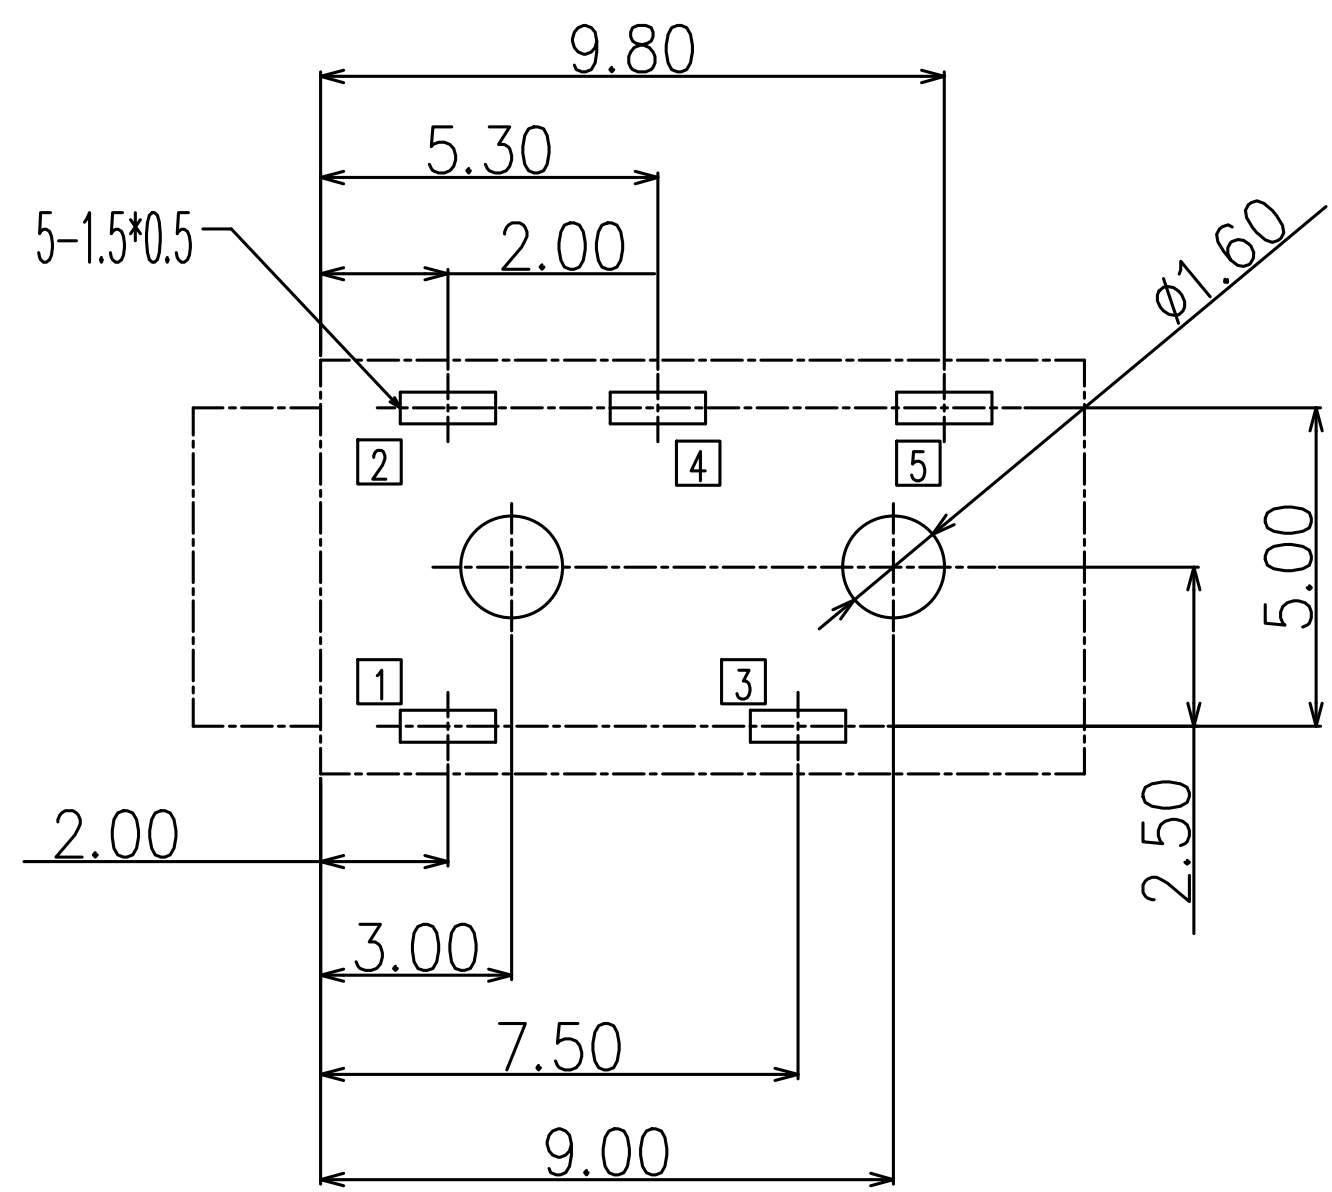


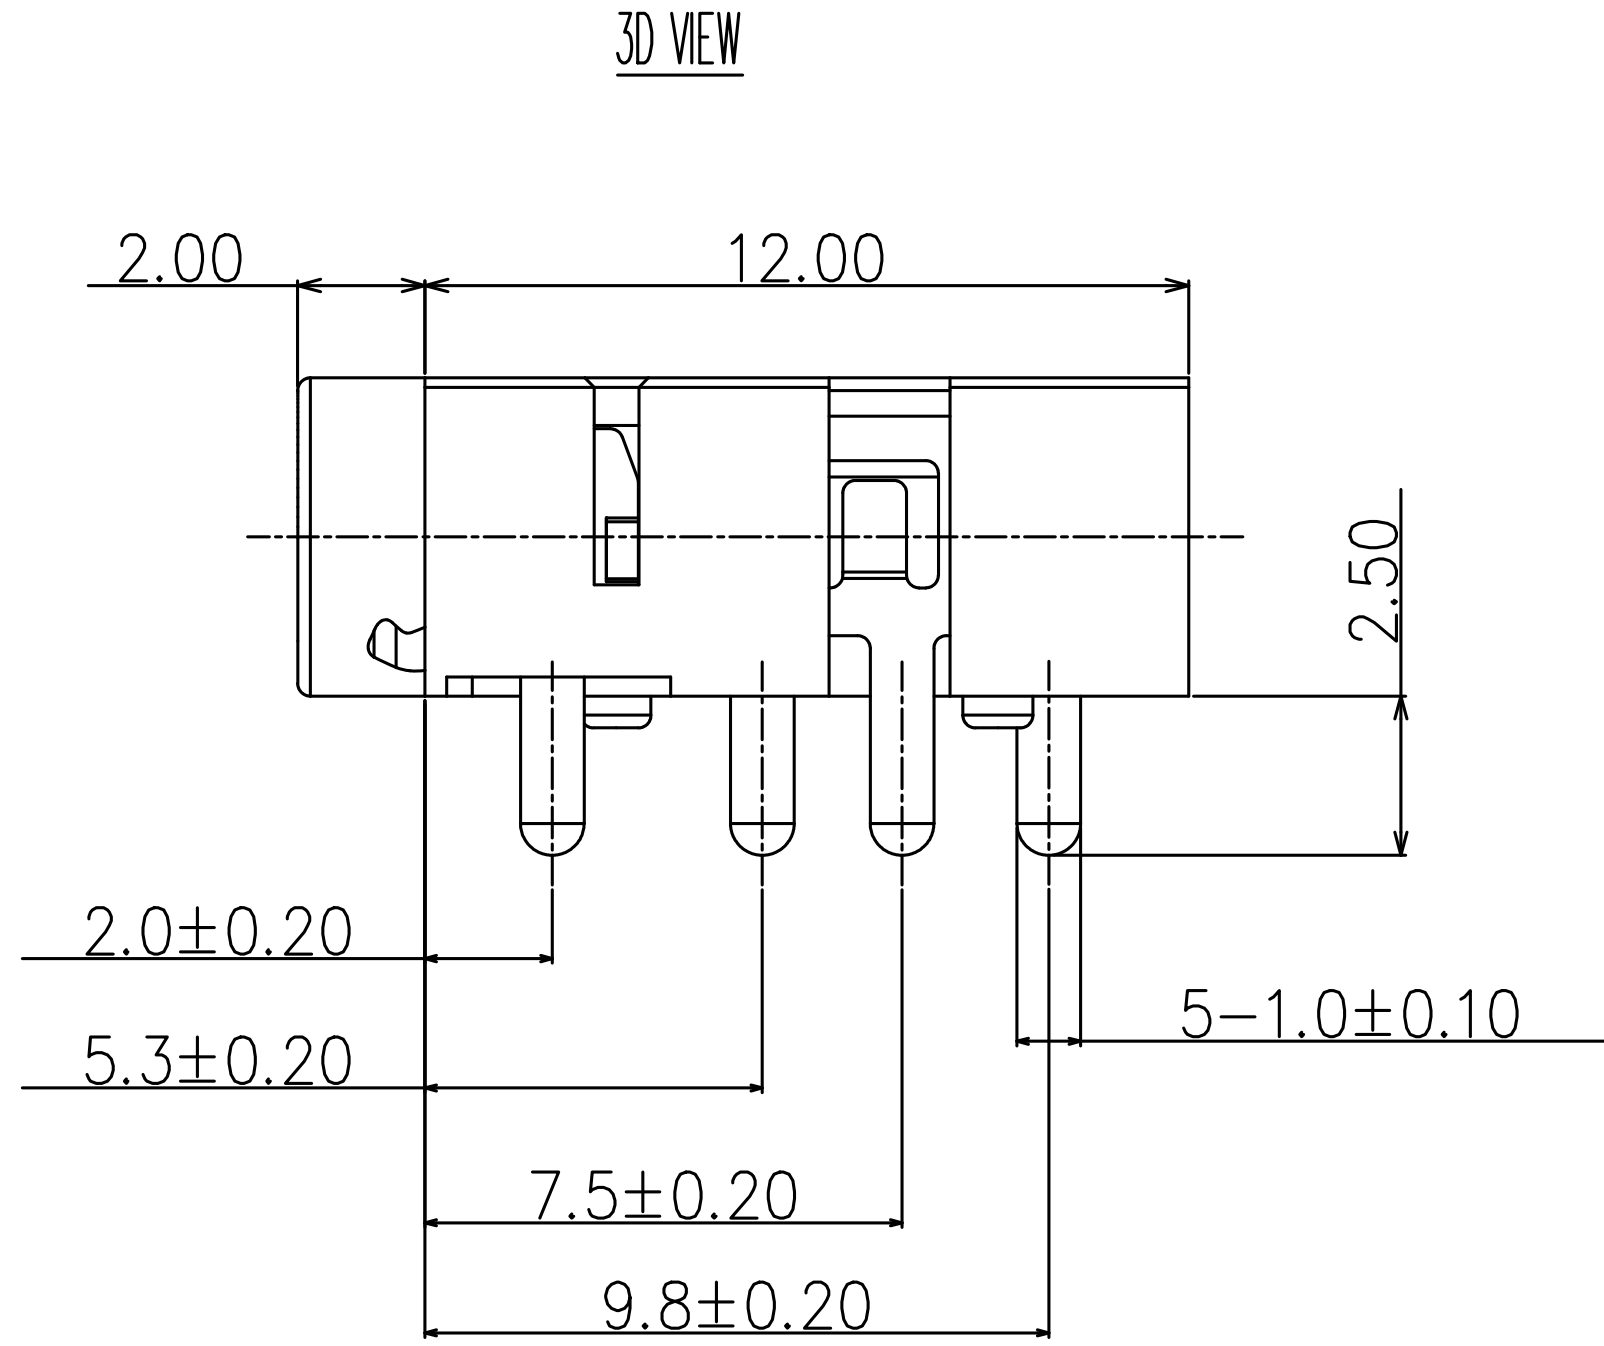

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 1000Ω MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 29.4N (3.00Kgf) MAX.;
7. CONNECTOR UNMATING FORCES: 2.94N(0.30Kgf) MIN.;

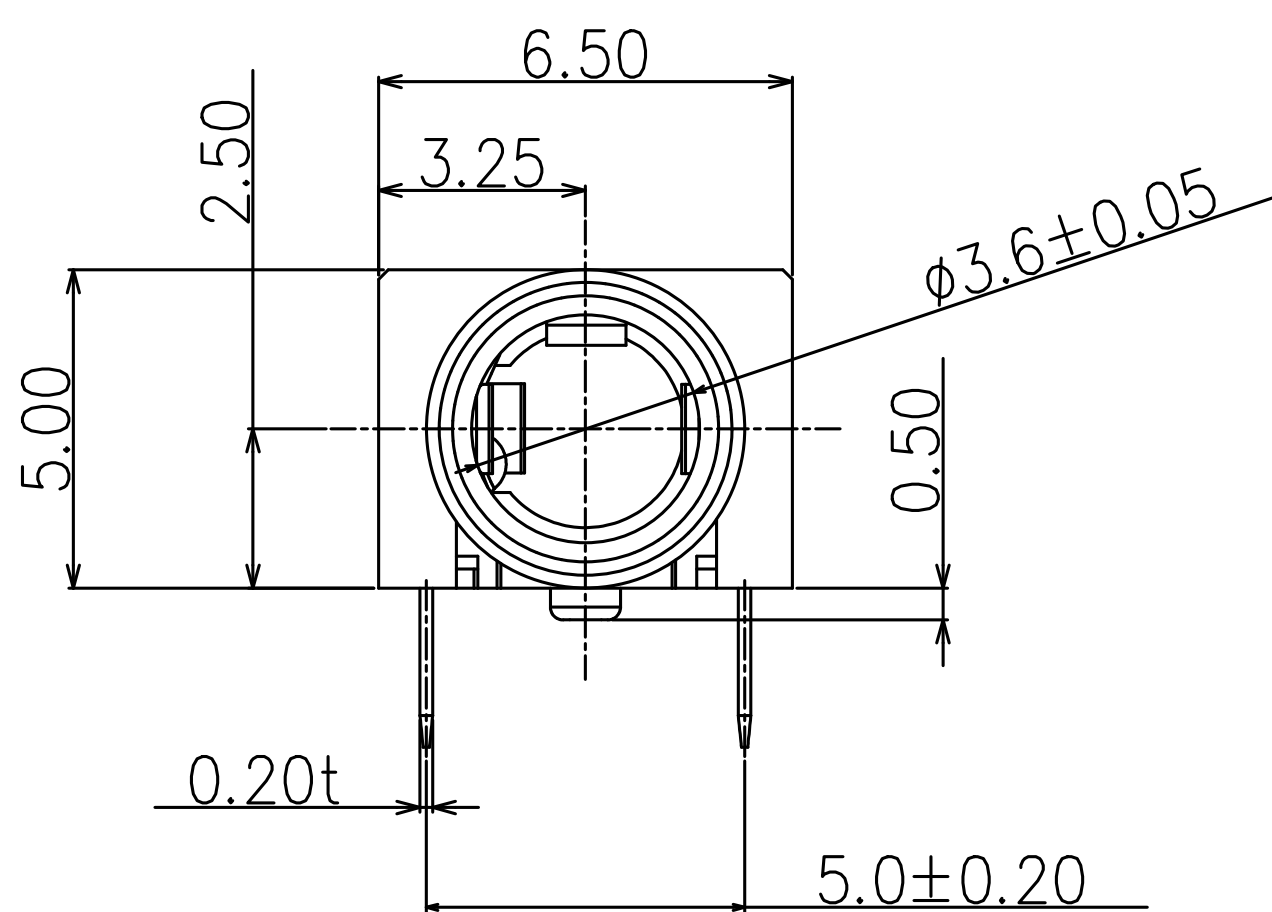

(φ3.50mm 4 POLE PLUG DETAIL DRAWING)

6	CONTACT 5#	1	PHOSPHOR BRONZE; THE BOTTOM OF THE NICKEL; THE WHOLE SILVER PLATED.	
5	CONTACT 4#	1	PHOSPHOR BRONZE; THE BOTTOM OF THE NICKEL; THE WHOLE SILVER PLATED.	
4	CONTACT 3#	1	PHOSPHOR BRONZE; THE BOTTOM OF THE NICKEL; THE WHOLE SILVER PLATED.	
3	CONTACT 2#	1	PHOSPHOR BRONZE; THE BOTTOM OF THE NICKEL; THE WHOLE SILVER PLATED.	
2	CONTACT 1#	1	PHOSPHOR BRONZE; THE BOTTOM OF THE NICKEL; THE WHOLE SILVER PLATED.	
1	HOUSING	1	PA9T BLACK	UL94V-2
ITEM	NAME	Q'TY	DESCRIPTION	NOTE

MEASURE POINT: QUADRANT POINT TANGENCY POINT INTERSECTION POINT		QP TP IP					
UNLESS OTHERWISE SPECIFIED, TOLERANCE: X. ±0.25 X.x ±0.20 X.xx ±0.15 X.xxx ±0.10 ANGULAR ±3°		DESIGN: Lucky	DATE 2017/06/10	TITLE: φ3.5mm PHONE JACK H=5.0 mm DIP TYPE CONNECTOR			
		CHECKED	DATE				
		APPROVED	DATE				
PART NO. PJ-327F 零件				REV.: X1	SCALE: 1:1	UNIT: mm	
DRAWING NO.				SIZE: A4	SHEET: 1/1		