

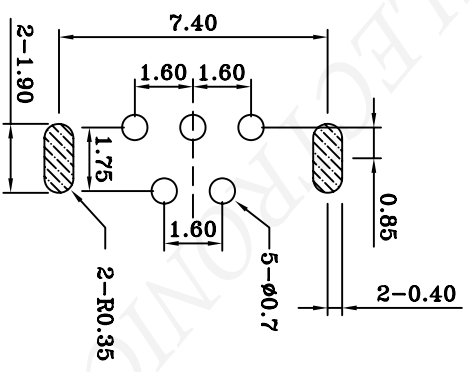
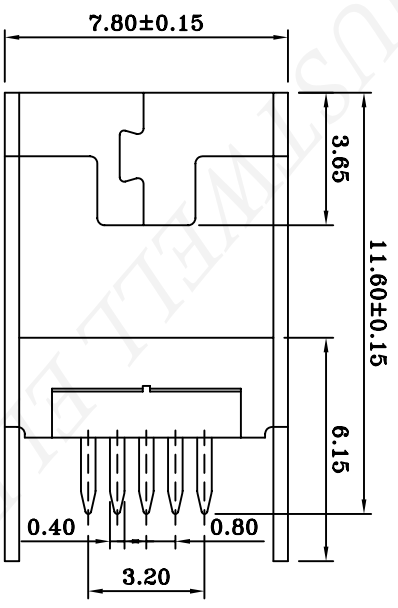
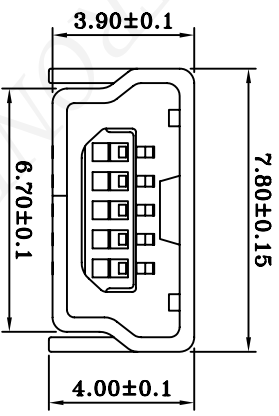


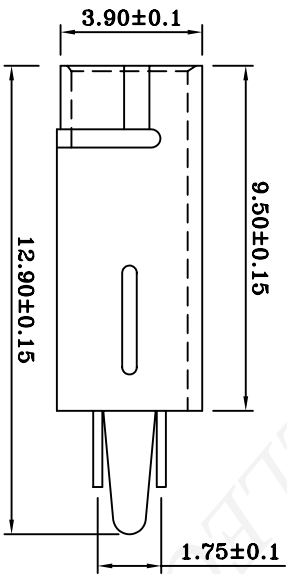

RECOMMENDED
P.C.B LAYOUT

- Electrical:**
Contact Resistance: 30mΩ max
Insulation Resisance: 100MΩ min
Dielectric Withstanding Voltage:
AC 100V AT Sea Level
- Matorial:**
Housing: Hing Temperature
Thermoplastics,LCP
Contact: Copper Alloy
Shell: Copper Alloy
Finish:
Contact: Plated Gold in Mating Area;
Tin On Solder Tails
Shell: Nickel Plating

NO:	PARTICULAR	BY	DATE
REVISIONS			
1			

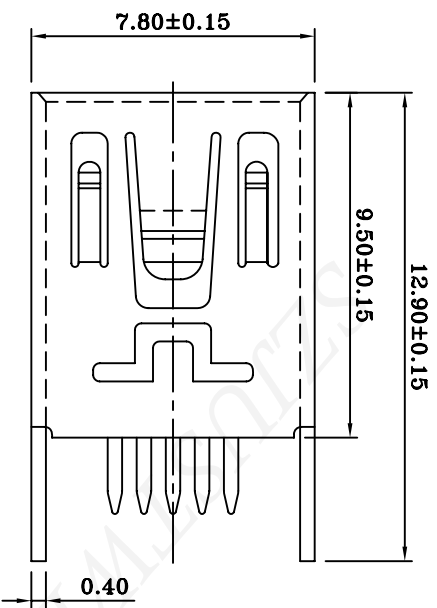

MODEL :	USB MN5-011	TOLERANCE: ±0.2	DRAWN BY: <i>Leiqin</i>	99.04.27
TITLE:	USB JACK	UNIT: mm	CHECKED BY: Liwei	99.04.30
DRWG NO:	MINI USB 5P	SCALE: 5:1	APPROVED BY: Wuxin	99.04.30