

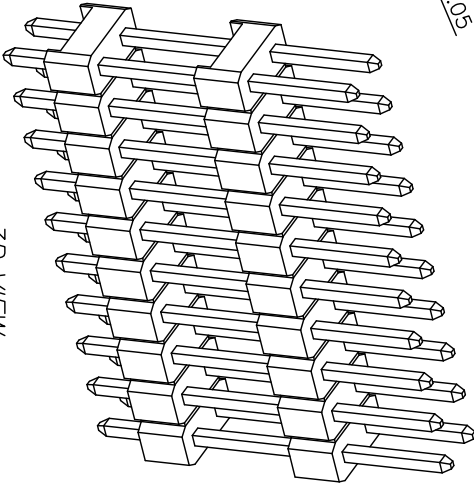


P.C.B LAYOUT

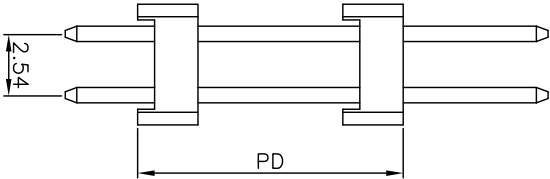


3D VIEW

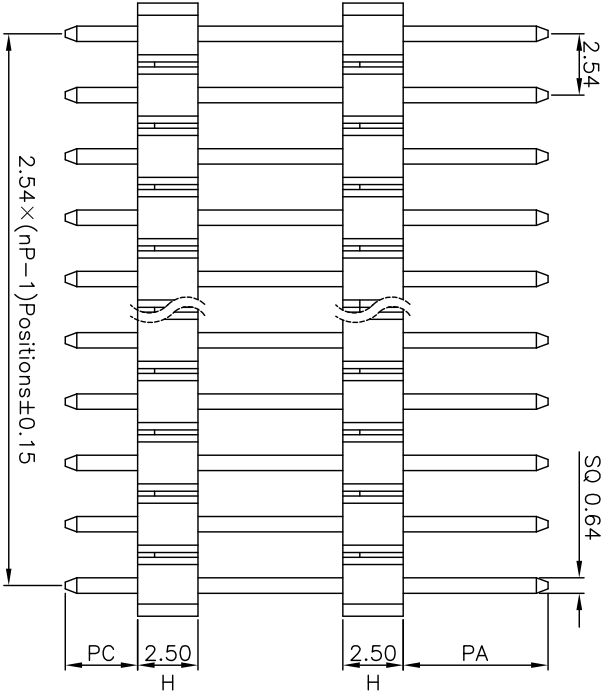

SPECIFICATIONS

Rated Current : 3.0AMP
Contact Resistance : 20mΩ Max
Withstand Voltage : 500V AC/DC
Insulation Resistance : 1000MQ Min
Operation Temperature : -40°C to +108°C

Contact Material : Brass
Contact Plating : Au or Sn Over Ni
Insulator Material : Polyester(UL94V-0)
Standard : PA6T
Max Processing Temp : 230°C for 5-10 seconds

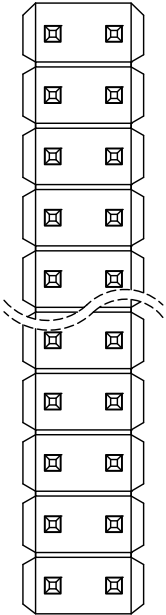

MODEL : 2.54-2×nP-H2.5-PAxx/PCxx/PDxx	DRAWN BY : Leiqin	DATE:	GENERAL TOLERANCE: (UNLESS SPECIFIED)
TITLE : 双层双排塑高2.5直插排针	CHECKED BY : Liwei	DATE:	X. ±0.30mm X.* ± 3°
DRAWING NO:	REV. : A	DATE:	X.X ±0.25mm X.X* ± 2°
SHEET: 1 OF 1	SCALE: 3:1	DATE:	X.XX ±0.20mm X.XX* ± 1°
SIZE: A4	UNIT : mm	DATE:	X.XXX±0.10mm X.XXX* ± 0.5°



深圳市吉威电子有限公司
SZJUSTWELL

MEASURE POINT:
QUADRANT POINT (QP)
TANGENCY POINT (TP)
INTERSECTION POINT (IP)

NO:	PARTICULAR	BY	DATE
REVISIONS			