
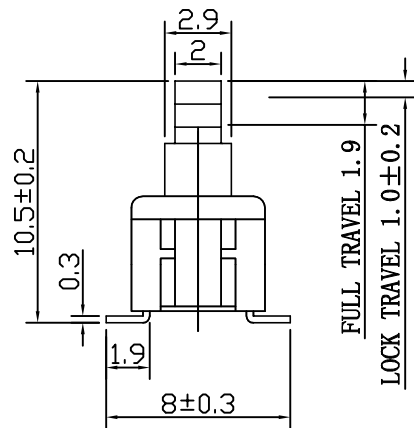
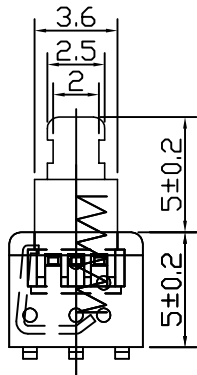







P. C. B LAYOUT



ELECTRICAL CHARACTERISTICS

1. RATING: DC 12V 0.05A
2. CONTACT RESISTANCE: 100mΩ MAX
3. INSULATION RESISTANCE: 100MΩ MIN
4. DIELECTRIC STRENGTH: AC 250V (50~60Hz)/60S

MECHANICAL CHARACTERISTICS

1. PRACTICAL TEMPERATURE RANG: -40℃~+85℃
2. OPERATING FORCE: 180±50gf
3. MECHANICAL LIFE: 30,000 cycles

8				
7	LOCK PIN	SUS WIRE	1	NATURAL
6	TERMINAL	BRASS	6	Ag PLATED
5	CASE	PPA	1	GRAY
4	SPRING	SUS WIRE	1	NATURAL
3	CONTACT	BRONZE	2	Ag PLATED
2	KNOB	PPA	1	WHITE
1	COVER	PPA	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING

DONGGUAN CITY JINBEILI ELECTRICAL TECHNOLOGY CO., LTD.

GENERAL TOLERANCE 未指的公差		TITLE		
X. ± 0.5	X. ° ± 5°	名称 PB60L180S1.9		
.X ± 0.3	.X ° ± 2°	PART NO. 零件编号		
.XX ± 0.2	.XX ° ± 1°			
.XXX ± 0.1	.XXX ° ± 0.5°	DWG NO. 图纸编号		PROJ. 图样编号
APPROVAL 审批		CHECKED 核准		REV.
DRAWN 设计		UNIT 单位 (mm)		SCALE 比例
ROBIN				1:1