
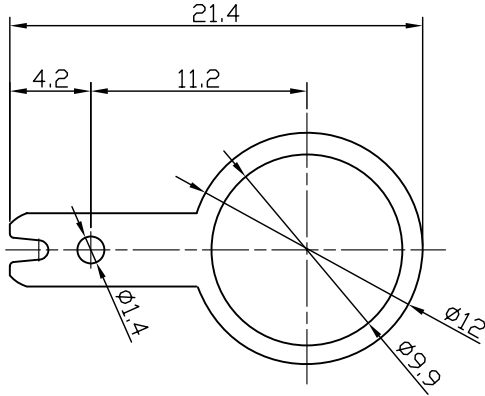
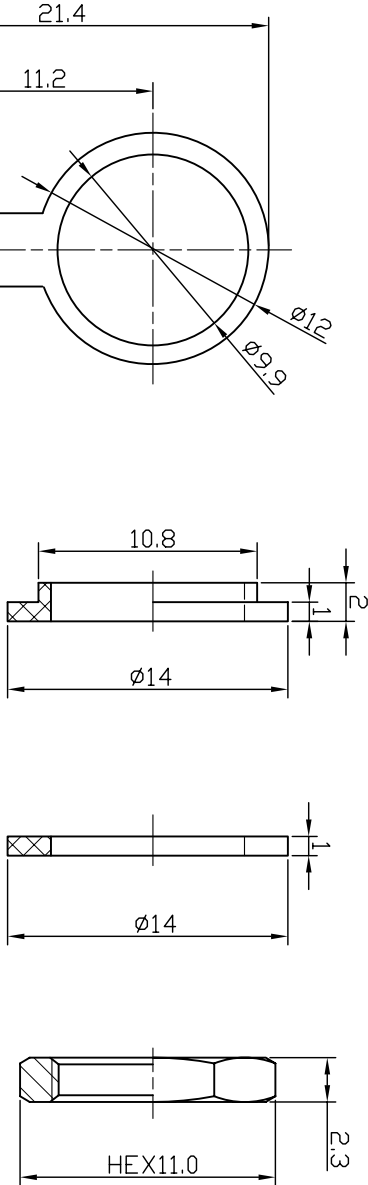


LTR.	REV.	RECORD	DATE
A 0	FIRST		APR.10.2007

1. MATERIAL
- 1.1 INSULATOR:POM,COLOR:WHITE OR RED.
- 1.2 BODY:BRASS ALLOY.
- 1.3 PIN:BRASS.
- 1.4 SOLDERING LUG:BRASS.
- 1.5 SCREW:BRASS ALLOY.
- 1.6 WASHER:POM,COLOR:WHITE OR RED.
2. FINISH
- 2.1 PIN :Gold Flash PLATED.
- 2.2 BODY:Gold Flash PLATED.
- 2.3 SOLDERING LUG:Nickel PLATED.
- 2.4 SCREW:Nickel PLATED.
- 3.ELECTRICAL CHARACTERISTICS
- 3.1 WORKING VOLTAGE: AC 250V.
- 3.2 WITHSTAND VOLTAGE:1000V,50Hz,rms.
- 3.3 INSULATION RESISTANCE:
1,000M OHM MIN.
- 3.4 IMPEDENCE:75 OHM.
- 4.ENVIRONMENTAL
- 4.1 WORKING TEMPERATURE:
-25°C~+65°C.
- 4.2 RELATIVE HUMIDITY:MAX 90%(40°

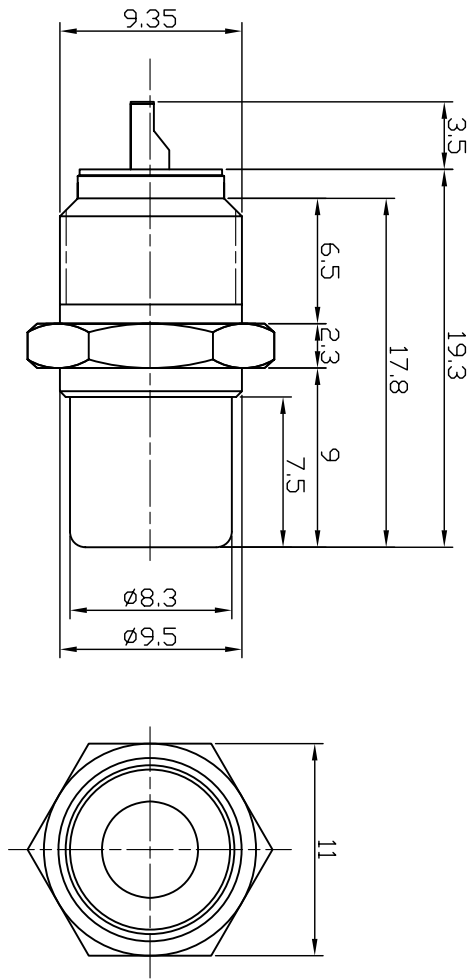

AUTHORITY		SIGNATURE		DATE		DESCRIPTION	DWG.ND.	TOLERANCE UNLESS OTHERWISE SPECIFIED			
DWN.		LILY		2011.02.12				RCA-001-20X			
CHK.						UNIT: mm	L INEAR				
APVD.								ANGLES			
DWG KIND:	CUSTOMER				REV.	A 0	SCALE	3:1	SHEET	1 OF 1	