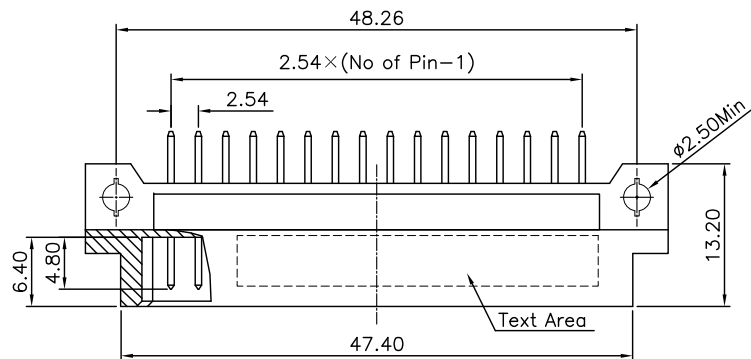


MATERIAL:

Housing : PBT UL94V-0 Beige

Contacts: Copper Alloy

ELECTRICAL CHARACTERISTICS:



Current Rating: 2 AMP

Dielectric Withstanding Voltage: AC1000V for 1 minute

Insulator Resistance: 1000MΩ min at DC 500V

Contact Resistance: 20mΩ max at DC 100mA


Operating Temperature: -55°C ~ +125°C

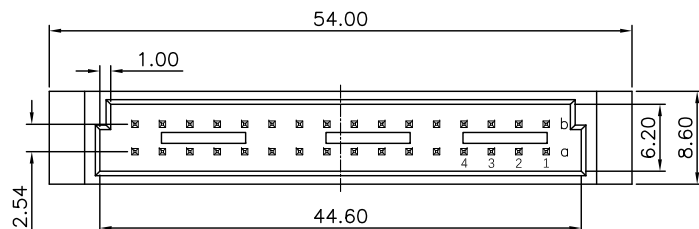

9001- 3 5 xx 0 C xx x A

3: 2.54mm
5: Male
Position
0: Dip Length
C: Dip Tin
Contact Gold
G: Gold

A: Tray Package
Blank: W/O Lock
L1: With Lock
00: G/F
10: 10u"
15: 15u"
30: 30u"

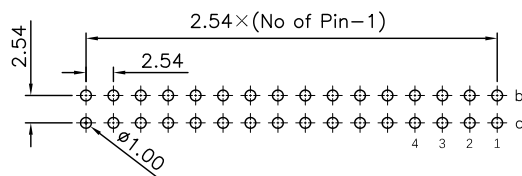P.C.B LAYOUT

Pitch	Position	Rows with Contacts	Contact Arrange
2.54mm	32	a b	
	16	a -	

MODEL: 9001-35xx0CxxA		DRAWN BY : <i>Leiqin</i>		DATE:	GENERAL TOLERANCE: (UNLESS SPECIFIED) X. ±0.30mm X.* ± 3° X.X ±0.25mm X.X* ± 2° X.XX ±0.20mm X.XX* ± 1° X.XXX±0.10mm X.XXX*± 0.5° MEASURE POINT: QUADRANT POINT (QP) TANGENCY POINT (TP) INTERSECTION POINT (IP)
TITLE : 2.54弯公胶芯+直针欧式连接器		CHECKED BY : <i>Liwei</i>		DATE:	
DRAWING NO:	REV. : A	APPROVED BY: <i>Wuxin</i>		DATE:	
SHEET: 1 OF 1	SCALE: 3:1	SIZE: A4	UNIT : mm		
 深圳市吉威电子有限公司 SZJUSTWELL ELECTRONICS CO., LTD					

NO:	PARTICULR	BY	DATE
REVISIONS			