


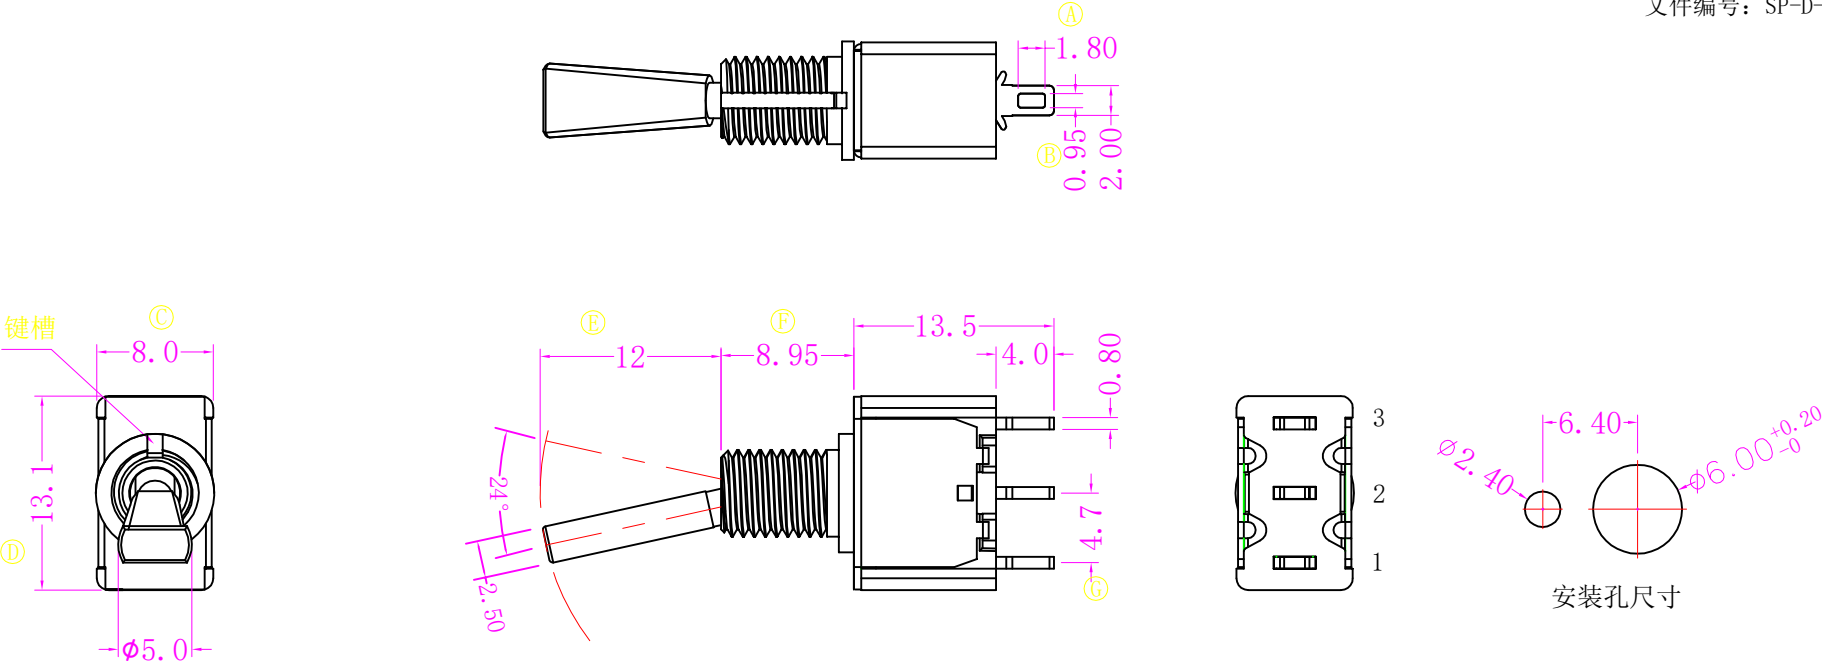

标注：Ⓐ - Ⓔ 为重点检测尺寸

Technical characteristics

SPECIFICATION:5 A max. @ 125 VAC.
2 A max. @ 250 VAC.
MECHANICAL LIFE:40,000 make-and-break cycles.
CONTACT RESISTANCE:20mΩ max.initial @2-4VDC
100mA for both silver.
INSULATION RESISTANCE: 1000 MΩ min.
DIELECTRIC STRENGTH: 1500 VAC min.
OPERATING TEMPERATURE: -30°C to +85°C.

Materials

CASE: PPA (UL 94V-0)
HOUSING: Stainless Steel.
ACTUATOR: Alloy,chrome plated.
BUSHING: Alloy ,nickel plated.
CONTACT/TERMINALS: Copper alloy silver plated.
RoHS

手柄位置及导通端子示意图

	POS. 1	POS. 2	POS. 3
Model NO.			
103	ON	OFF	ON
SCHEMATIC		OPEN	

				公差 TOLERANCES		.X± 0.4 .XX± 0.25		角度 ± 5°		UNIT 单位 mm	SCALE 1:1	
				版本 VERSION	A0	比例尺 SCALE	NONE	日期 DATE	2022. 11. 1	TITLE 图名	TOGGLE SWITCH	
				核准		核对		绘图		DWG NO. 料号	SM01515ZNR	
版本 VER.	变更说明 CHANGE DESCRIPTION		日期 DATE	ECN NO.	APPROVED BY	CHECKED BY		DRAWN BY	WSL	PART NO. 型号	MT-0-103-F001-T000-RS	