


ABIDE BY HSF

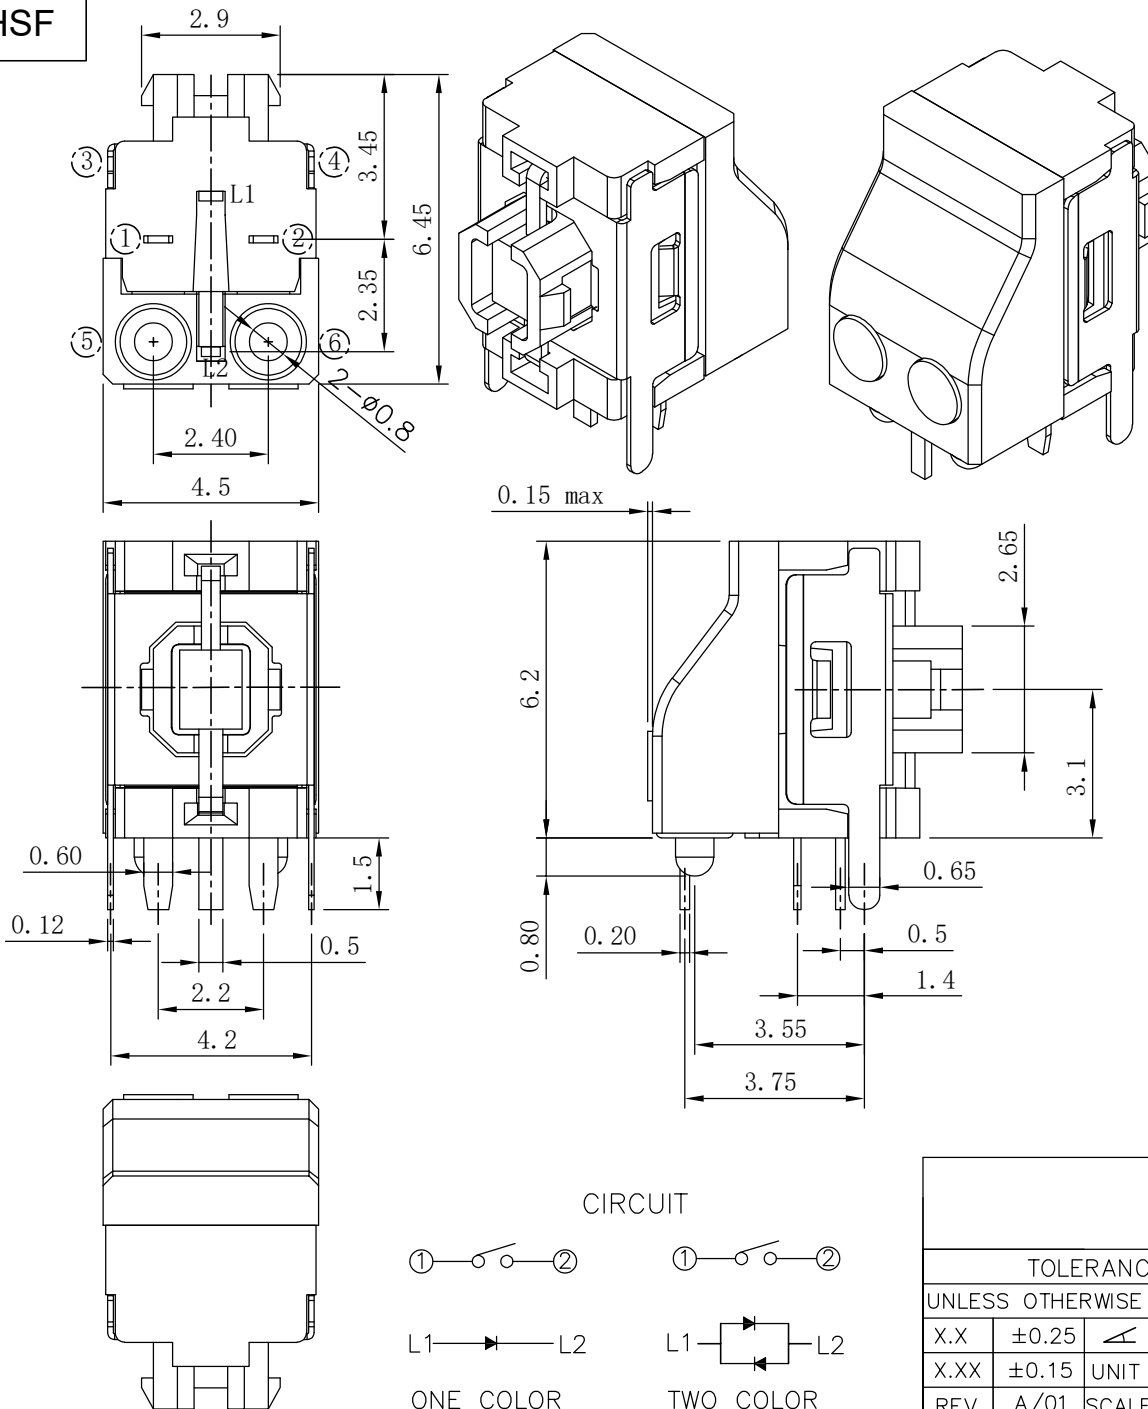

NOTES:

1. RATING: 12VDC 50mA
2. CONTACT RESISTANCE: 100mΩ Max
3. INSULATION RESISTANCE: 100VDC FOR 1MIN
4. DIELECTRIC STRENGTH: 250VAC (50/60Hz) FOR 1MIN
5. LIFE TEST: 50,000 CYCLES
6. OPERATION FORCE: 250±50g
7. TRAVEL: 0.2±0.1mm
8. WATER PROOF LEVEL: IP66

LED COLOR					
1	2	3	4	5	6
Red	Yellow	Green	Blue	White	Pure Green

7	FIXTY		LCP (WHITE/BLACK)		
6	COVER		SUS301 (Local gold/Ag plating)		
5	TERMINAL		H65 (C2680) Au/Ag plated		
4	CONTACT		SUS301 (Single sided gold/silver plating)		
3	LED		GaAsP/GaP		
2	BUTTON		LCP (WHITE/BLACK)		
1	HOUSING		LCP (WHITE/BLACK)		
ITEM	PART NAME		MATERIAL		



TOLERANCE				DRAWN		DATE	TITLE	TACT SWITCH	
UNLESS OTHERWISE STATED				01/XX/24		2023.06.15			
X.X	±0.25	∠	±2°	CHK'D		DATE	MODEL	TC16-1RL-X	
X.XX	±0.15	UNIT	mm				MATL		
REV	A/01	SCALE	1:1	APPV'D		DATE	FINISH		
SIZE	A4	SHEET	1 OF 1						