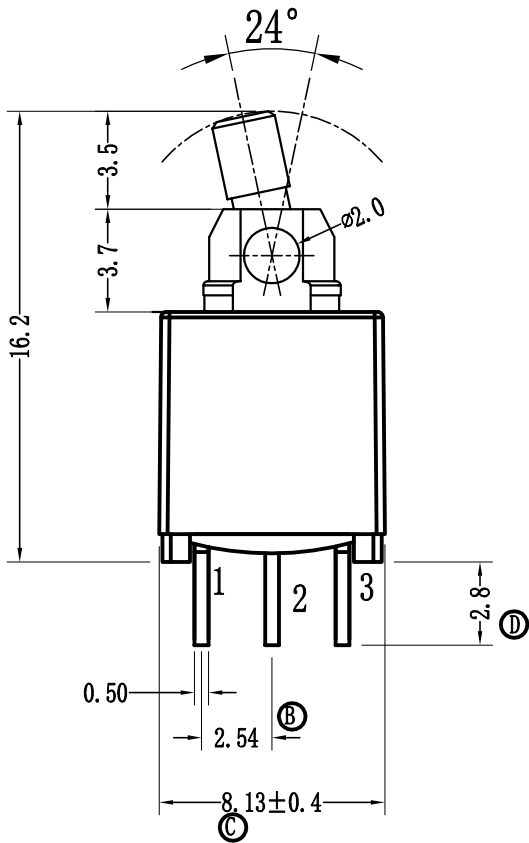


安装孔尺寸

Technical characteristics

SPECIFICATION:3 A max. @ 125 VAC.
1 A max. @ 250 VAC.
MECHANICAL LIFE:40,000 make-and-break cycles.
CONTACT RESISTANCE:20mΩ max. initial @2-4VDC
100mA for both silver.
INSULATION RESISTANCE: 1000 MΩ min.
DIELECTRIC STRENGTH: 1000 VAC min.
OPERATING TEMPERATURE: -30°C to +85°C.

Materials

CASE: PPA (UL 94V-0)
ACTUATOR: Alloy,chrome plated.
CONTACT/TERMINALS: Copper alloy silver plated.
RoHS

手柄位置及导通端子示意图

	POS. 1	POS. 2	POS. 3
Model NO.			
123	(ON)	OFF	(ON)
SCHEMATIC		N/A	

此图纸仅供参考，实际尺寸以实物为准！

				公差 TOLERANCES		. X± 0.4 . XX± 0.25		角度	± 5°	UNIT 单位	mm	SCALE 1:1	
				版本 VERSION	A0	比例尺 SCALE	NONE	日期 DATE	2024. 6. 4	TITLE 图名		Sub-Miniature Toggle Switch	
				核准		核对		绘图	WSL	DWG NO.料号			
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY		PART NO.型号		SA-0-123-002-0000-WP	