
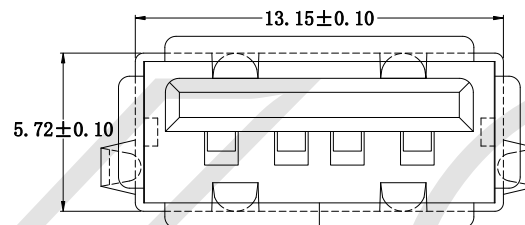


1
文件类型: 产品图面

4		5			
REV.	ECN NO.	DESCRIPTION	DRWN	APPD.	DATE.

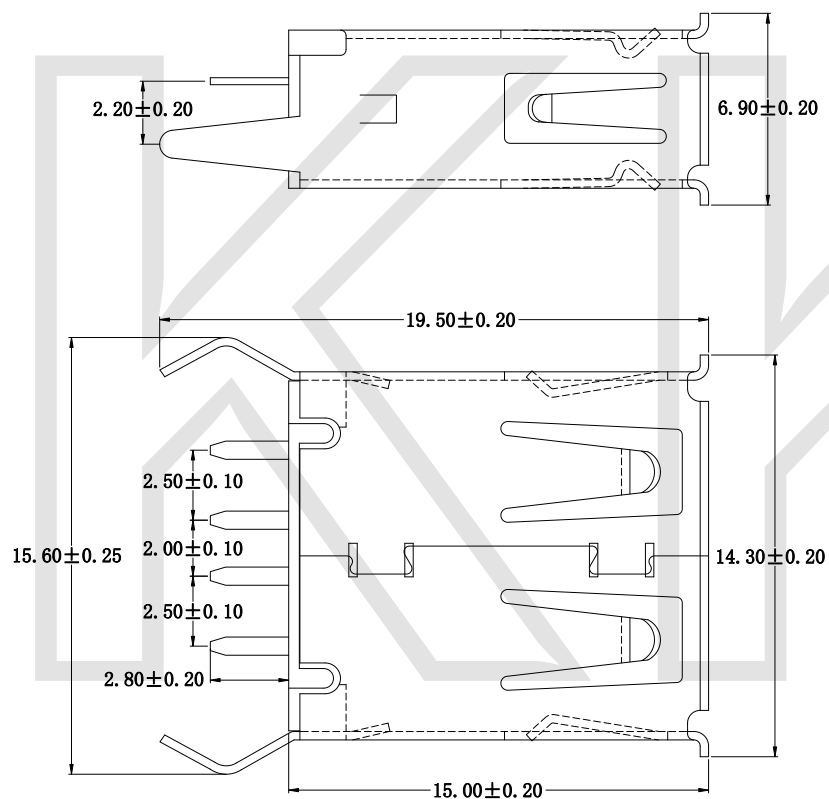

Specifications:

Electrical:

1. Current Rating
1.5A/contact terminal
2. Voltage Rating
30V DC
3. Contact Resistance
30 milliohms MAX
4. Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. Insulation Resistance:
1000MEGA ohms MIN

Mechanical:


1. Connector Mate and Unmate Force
Mate force: 3.75kgf (MAX)
Unmate force: 1.02kgf (MIN)
2. Terminal Retention
1.2kgf (MIN)

Material:


1. Housing:
Hing Temperature Tnermaplastics,
U1 94V-0 PBT/LCP White/Black
2. Contact: Copper Alloy C2680
3. Shell: Copper Alloy C2680/SPCC

Finish:

1. Contact: Plated Gold in Mating Area;
Tin On Solder Tails
2. Shell:
Nickel Plating

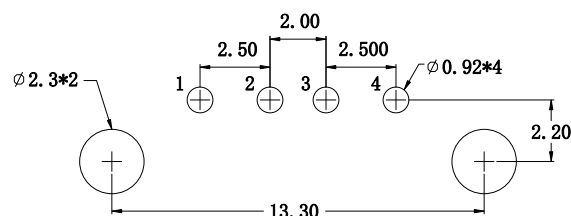

UNITS	SCALE
MM	1:1



GENERAL TOLERANCE	
X.	±0.30
X.X	±0.20
X.XX	±0.10
X.°	±3°
X.X°	±2°

KKG 东莞市洋瀚实业有限公司
TEL: 86-769-82036866 FAX: 86-769-82076788

DR. Aaron		TITLE: USB A/F 180° DIP长体 (改脚15.00)			
CHK. Aaron		MAT' L:		DWG NO: JYUB001-4C	
APPD. PANYUFENG		DATE: 2011.06.28		P	PART NO:
					SIZE A4