
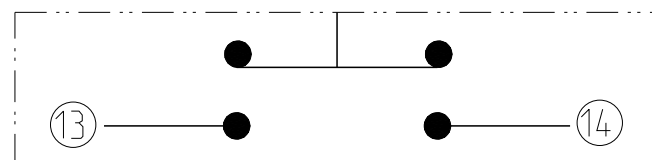

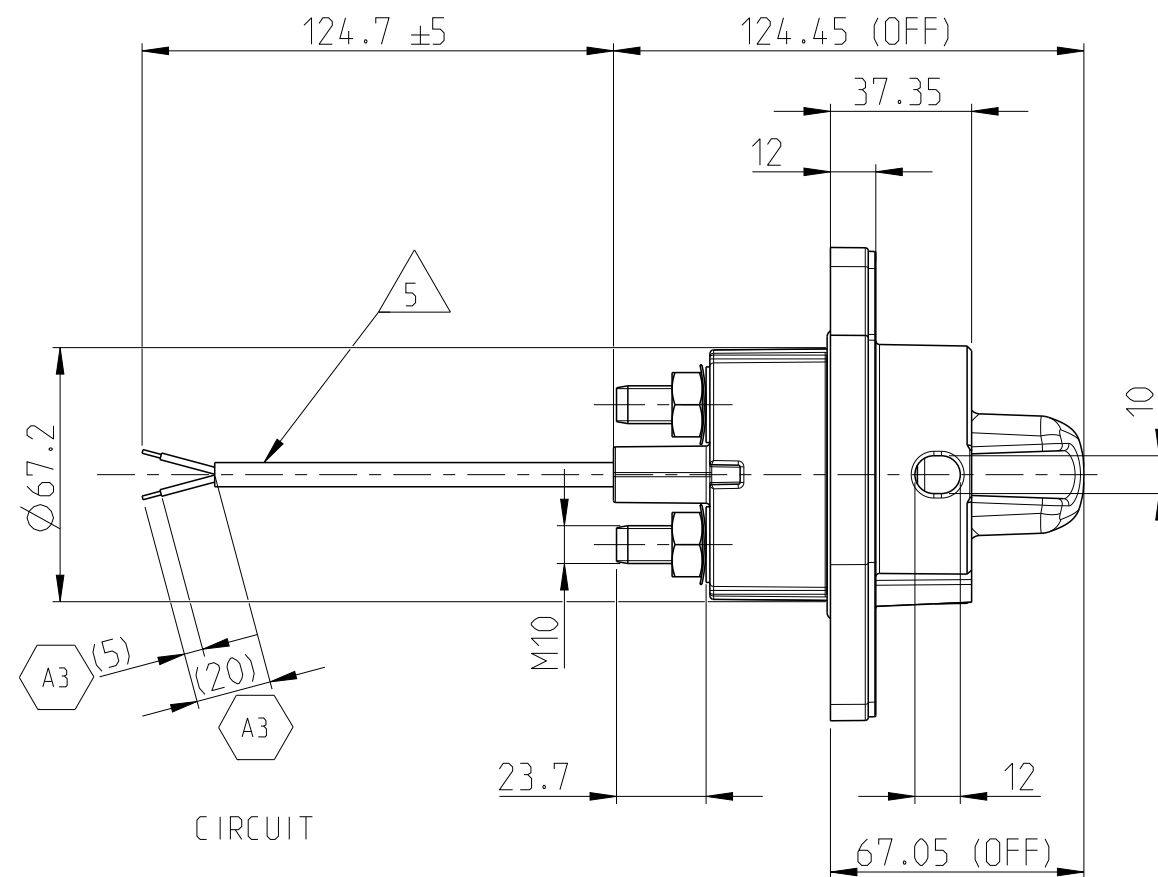
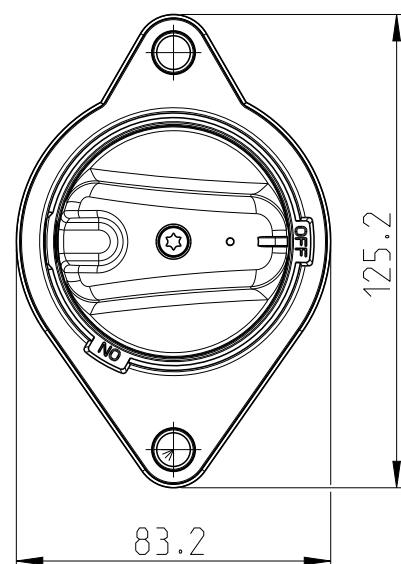
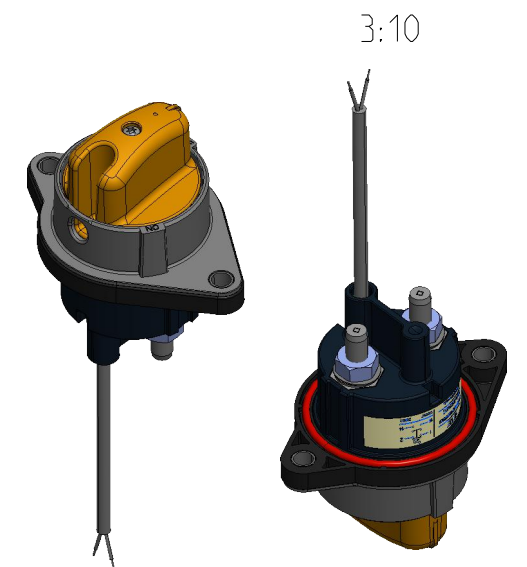


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW DRAWING	23MAY2022	AF	JH
	A1	ECN-23-218637	22JUN2023	AF	JH
	A2	ECN-23-229558	30AUG2023	AF	JH
	A3	ECN-23-235704	18OCT2023	AF	JH


NOTES

Bemerkungen

- 1 TE-CONNECTIVITY ORDER-NUMBER
TE-Connectivity Bestellnummer
- 2 CHECK THE FIT OF THE O-RING BEFORE ASSEMBLY
Vor der Montage die korrekte Position des O-Rings kontrollieren
- 3 DO NOT SWITCH UNDER LOAD!
Nicht unter Last schalten!
- 4 MAXIMUM SPACE FOR THE CABLE LUG
Maximaler Freiraum für den Kabelschuh
- 5 HELUKABEL SiHF 2x0,75mm². OUTER DIAMETER 6,4mm. ART. NR. 23001
Helukabel SiHF 2x0,75mm². Außendurchmesser 6,4mm. Art. Nr. 23001

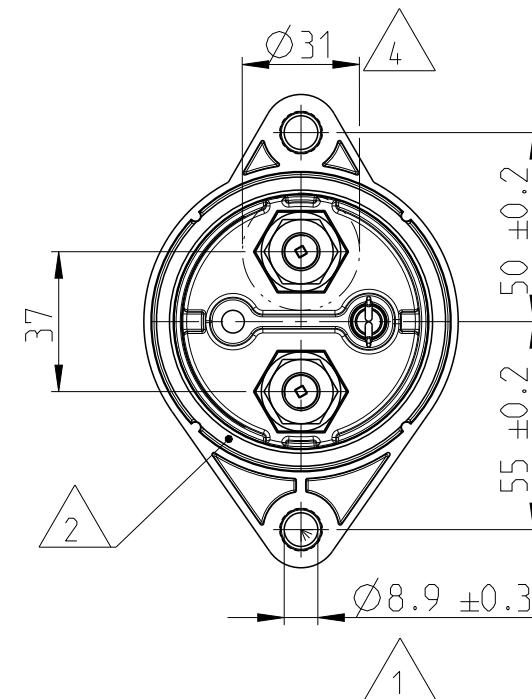

HVIL

THIS DRAWING IS A CONTROLLED DOCUMENT.											
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: DIN ISO 2768 cL										
	<table border="0"> <tr><td>0 PLC</td><td>±</td></tr> <tr><td>1 PLC</td><td>±</td></tr> <tr><td>2 PLC</td><td>±</td></tr> <tr><td>3 PLC</td><td>±</td></tr> <tr><td>4 PLC</td><td>±</td></tr> </table>	0 PLC	±	1 PLC	±	2 PLC	±	3 PLC	±	4 PLC	±
0 PLC	±										
1 PLC	±										
2 PLC	±										
3 PLC	±										
4 PLC	±										
MATERIAL	ANGLES ±										
	FINISH										
-	-										
	-										

DWN	26APR2022
A. FRITZ	
CHK	04NOV2022
A. O. WALZ	
APVD	10NOV2022
J. HOFFMANN	
PRODUCT SPEC	
108-94883	
APPLICATION SPEC	
114-94778	
WEIGHT	-
CUSTOMER DRAWING	

		TE Connectivity	
		NAME HIGH VOLTAGE BATTERY DISCONNECTOR Hochvolt Batterietrennschalter	
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A 3	00779	 35H-511-0100-0R2100001	-
		SCALE	REV
		1:2	A 3