
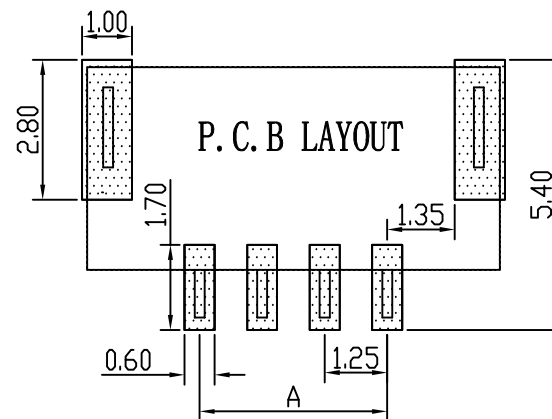


Pin	A	B	C
2	1.25	5.75	3.75
3	2.50	7.00	5.00
4	3.75	8.25	6.25
5	5.00	9.50	7.50
6	6.25	10.75	8.75
7	7.50	12.00	10.00
8	8.75	13.25	11.25
9	10.00	14.50	12.50
10	11.25	15.75	13.75
11	12.50	17.00	15.00
12	13.75	18.25	16.25
13	15.00	19.50	17.50
14	16.25	20.75	18.75
15	17.50	22.00	20.00
16	18.75	23.25	21.25

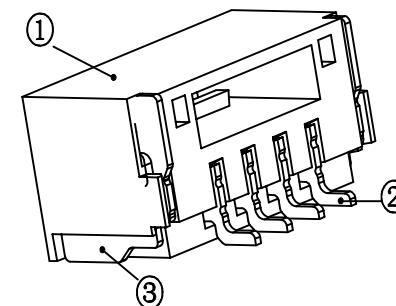

耐 压: 500V AC/minute

标记	变 更 内 容			签名	年月日
绘图	Lin L	230509			
审核	Lin R	230509			
工艺			批准	Lin R	230509

共 1 张 第 1 张

ZX-GH1.25-NPWT