

RoHS

SPECIFICATIONS

Rated Current:1.5AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40℃ to +105℃

Contact Material:Brass





Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230℃ for 30-60 seconds
(260℃ for 10 seconds)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

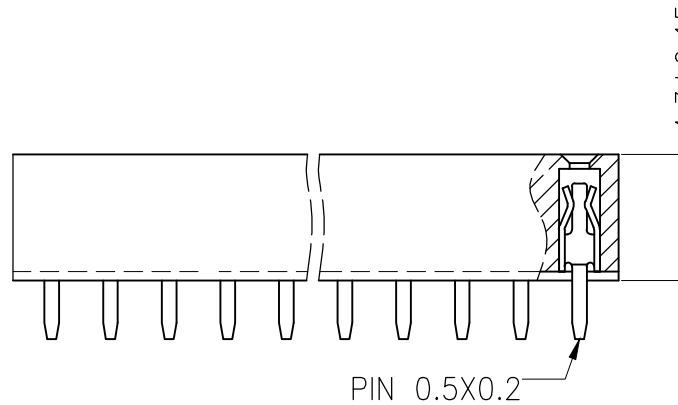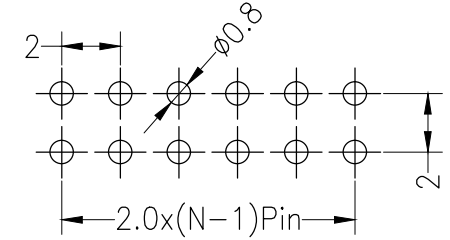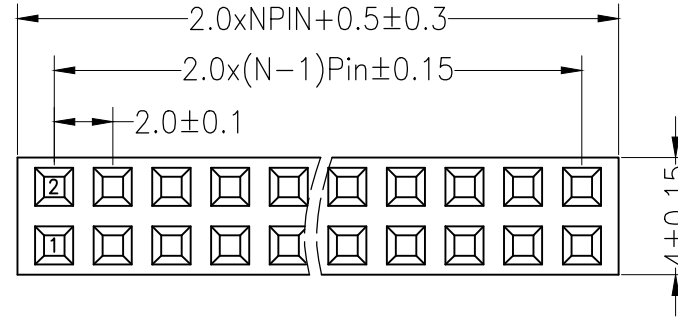

料号 : 3BS122204201LSJM

OPERATION

DRAW

SCALE

FIT

深圳市连盛精密连接器有限公司

X.X ±0.30

CHECK

UNIT

mm

X.XX ±0.20

SIZE

A4

PART NO.

1020200153

X.XXX ±0.10

SHEET

1/1

TITLE:

2.0FH H4.3mm 2x10pin 180° W4.0
PC2.4

Angle ±3°

APPROVE

PROJ.



REV DATE MODIFICATION DESCRIPTION CHANGE

1 2 3 4 5 6 7 8 9