

RoHS

SPECIFICATIONS

Rated Current:1.5AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C

Contact Material:Brass





Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

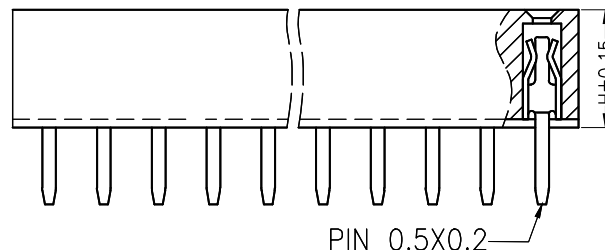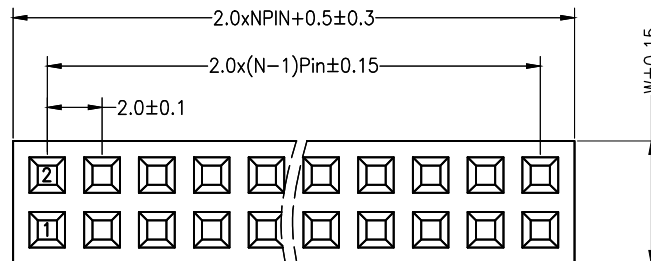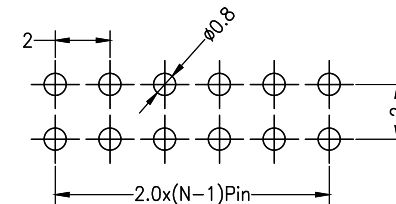

Ordering Information

F	2	D	2	XX	1	5	01	X	0039
产品类型 F=排母	间距 2=2.0	塑胶高度 D=4.3	排数 2=双排	单排PIN数 1~40P	产品形态 1=DIP	塑胶材料 5=PA6T	电镀厚度 00=常规 01=1u" 02=2u" 03=3u"	包装方式 1=管装 2=卷装 3=盘装 4=袋装 5=盒装	序列号

Dimension antitheses list					
ITEM	PB	PC	PW	H	W
001		2.4		4.3	4.0
002					

OPERATION

DRAW

SCALE

FIT

深圳市连盛精密连接器有限公司

X.X ±0.30

CHECK

UNIT

mm

X.XX ±0.20

SIZE

A4

X.XXX ±0.10

SHEET

1/1

Angle ±3°

APPROVE

PROJ.

◆

PART NO.

1020200008

TITLE:

2.0FH H=4.3 W=4.0 2*6P DIP PC2.4 U型
AU1U 青铜 PA6T

DIM

TOL

PROJ.

◆

PART NO.

1020200008

TITLE:

2.0FH H=4.3 W=4.0 2*6P DIP PC2.4 U型

AU1U 青铜 PA6T