

RoHS

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40℃ to +105℃

Contact Material:Brass





Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230℃ for 30-60 seconds
(260℃ for 10 seconds)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

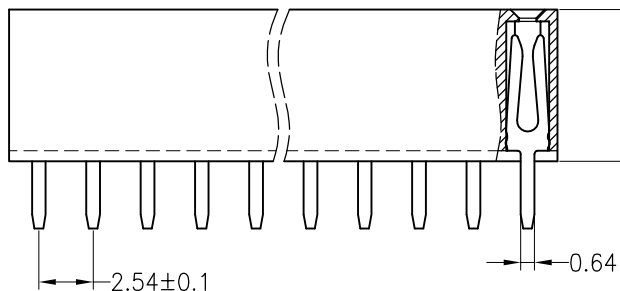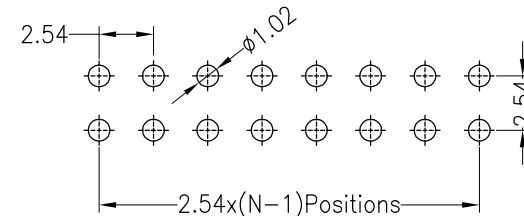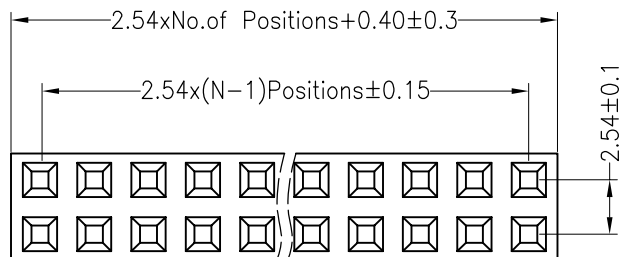

Ordering Information

F 3 N 2 07 1 5 01 X 0796

产品类型 F=排母
间距 3=2.54
塑胶高度 N=8.5
排数 2=双排
单排PIN数 1~40P
产品形态 1=DIP
塑胶材料 5=PA6T
电镀厚度 00=常规
01=1u"
02=2u"
03=3u"
包装方式 1=管装
2=卷装
3=盒装
4=袋装
5=盒装
序列号

Dimension antitheses list					
ITEM	PB	PC	PW	H	W
001		3.0		8.5	5.0

				OPERATION		DRAW			SCALE	FIT	深圳市连盛精密连接器有限公司	
				X.X	±0.30					UNIT		
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	1020300470
A0	2012.04.26	NEW DRAWING		X.XXX	±0.10				SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	Angle	APPROVE			PROJ.		TITLE:	2.54FH H=8.5 W=5.0 2x7P DIP PC3.0 Y型 AU1U 青铜 PA6T
					DIM							