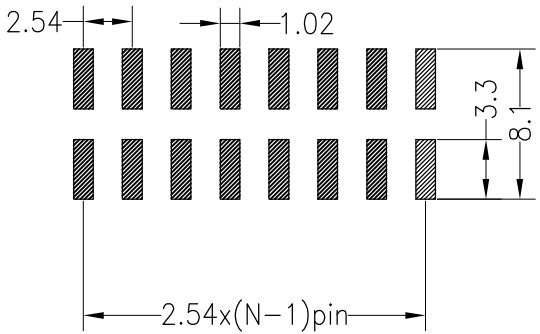
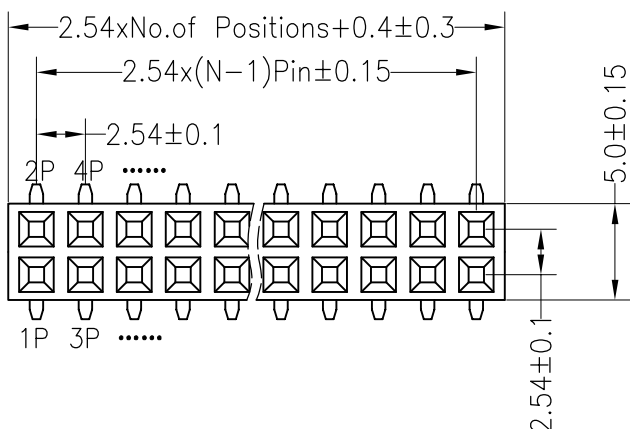
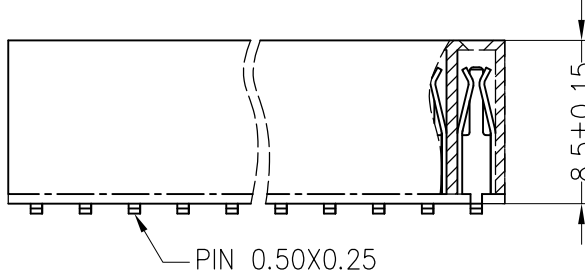



	2	3	4	5	6	7	8	9			
G	RoHS										
F	SPECIFICATIONS						Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)				
	Rated Current:3.0AMP										
	Contact Resistance:20mΩ Max										
	Withstand Voltage:1000V AC/DC										
	Insulation Resistance:1000MΩ Min										
	Operation Temperature:−40℃ to +105℃										
	Contact Material:Brass										
	Contact Plating:Au Over Ni										
	Insulator Material:Polyester(UL94V−0)										
	Standard: PA6T										
E	Max.Processing Temp: 230℃ for 30−60 seconds (260℃ for 10 seconds)										
											
D											
C	Ordering Information										
B	F	3	N	2	20	3	5	01	X	0878	
	产品类型 F=排母	间距 3=2.54	塑胶高度 N=8.5	排数 2=双排	单排PIN数 1~40P	产品形态 3=SMT	塑胶材料 5=PA6T	电镀厚度 00=常规 01=1u" 02=2u" 03=3u"	包装方式 1=管装 2=卷装 3=盒装 4=袋装 5=盒装	序列号	
A											
						OPERATION				SCALE	FIT
						X.X	±0.30			UNIT	mm
						X.XX	±0.20			SIZE	A4
						X.XXX	±0.10			SHEET	1/1
	A0					Angle	±3°			PROJ.	
	REV	DATE	MODIFICATION	DESCRIPTION	CHANGE	DIM	TOL			TITLE:	
	1		2		3	4	5	6	7	8	9