

RoHS

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40℃ to +105℃


Contact Material:Brass

Contact Plating:Au Over Ni




Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230℃ for 30-60 seconds
(260℃ for 10 seconds)

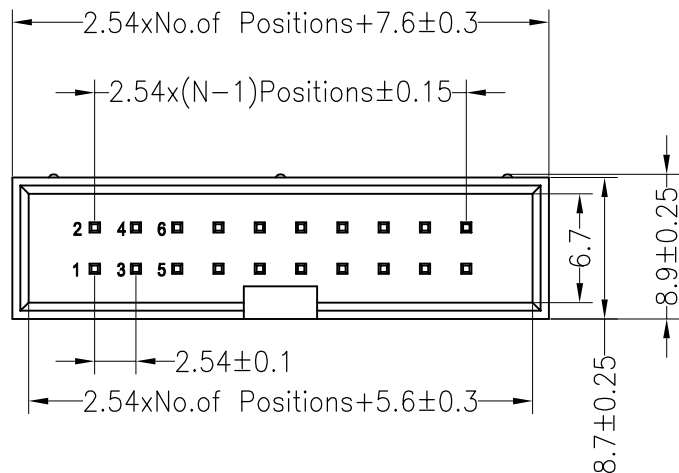

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

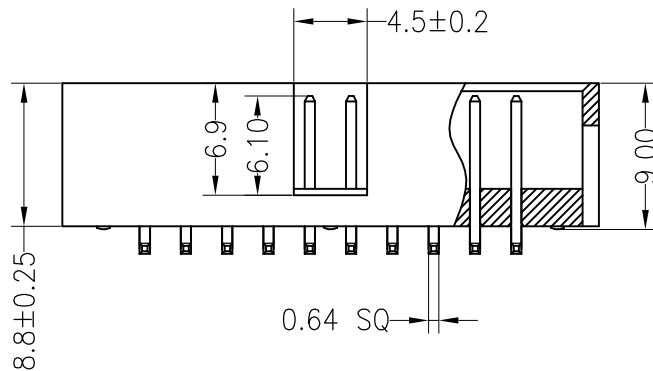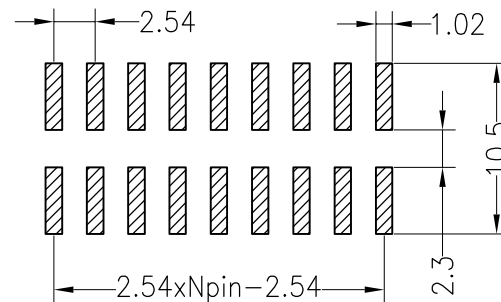

料号 : 301100215S2S5R005

				OPERATION		DRAW	YiYuSheng	12.03.28	SCALE	FIT	深圳市连盛精密连接器有限公司	
				X.X	± 0.30				UNIT	mm		
				X.XX	± 0.20	CHECK			SIZE	A4	PART NO.	1030300015
A0	2012.03.28	NEW DRAWING		X.XXX	± 0.10				SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	ANGLE	APPROVE			PROJ.		TITLE:	2.54BOX H8.8mm 30P SMT
1	2	3	4	5	6	7	8	9				