

Micropower 300mA Low-Noise Ultra-Low-Dropout Regulator

Features

- Input Voltage Range: 2.5V to 20V
- Output Voltage Range:
 - Fixed Operation: 1.2V to 5.0V
- Maximum output current: 300mA
- Low Dropout Voltage: 152mV at 300mA
- Low Quiescent Current
- Low Noise When Using External Bypass Cap
- Output Voltage Accuracy: 2% over Line, Load and Temperature
- Excellent Load and Line Transient Responses
- Thermal Shutdown and Over-Current Protection
- Stable with 1 μ F or Larger Ceramic Capacitor
- Operating Junction Temperature: -40°C to +125°C
- Available packages: SOT23-5

Applications

- Washers and Dryers
- Land Mobile Radios
- Active Antenna System mMIMO
- Cordless Power Tools
- Motor Drivers and Control Boards

Description


The device is a fixed-output, wide-input, low-noise, low-dropout voltage regulator supporting an input voltage range from 2.5V to 16V and up to 300mA of load current. The device supports an output range of 1.2V to 5.0V.

Additionally the device has a 2% output accuracy across load, line and temperature that can meet the needs of low-voltage microcontrollers (MCUs) and processors.

Low output noise (with 10nF bypass capacitor) and wide bandwidth PSRR help attenuate the switching noise of an upstream DC/DC converter and minimize post regulator filtering.


The device also features short-circuit current limit and thermal shutdown protection, as well as automatic discharge function to quickly discharge V_{OUT} in the disabled states.

Typical Application Circuits

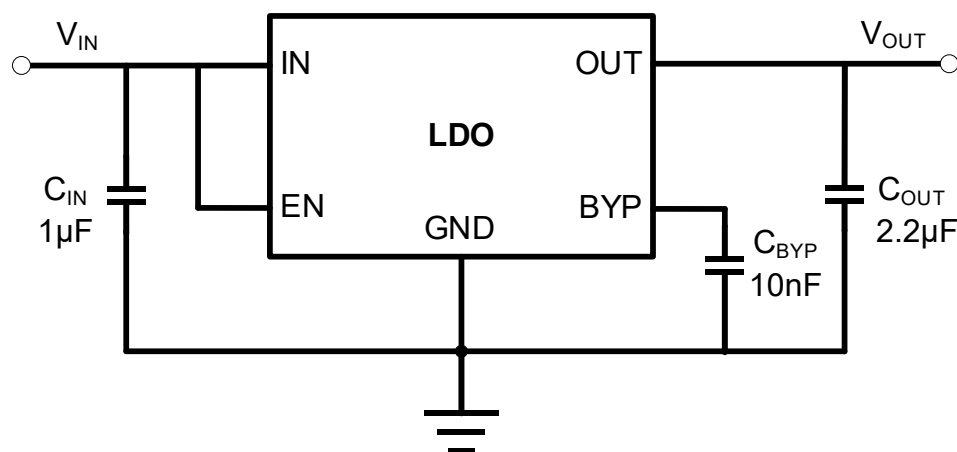

Low Noise Fixed Output Voltage

Pin Configuration and Functions

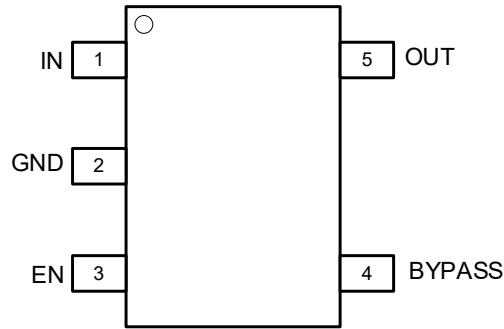

5-Pin SOT-23 (Top View)

Pin Descriptions

PIN Number	PIN Name	I/O	Function
1	IN	I	Input supply voltage pin. It is recommended to use a 1 μ F or larger ceramic capacitor from IN pin to ground to get a good power supply decoupling.
2	GND	-	Ground.
3	EN	I	Enable Pin. Drive EN high to turn on the regulator. Drive EN low to turn off the regulator.
4	BYPASS	I	Connect an external 10nF capacitor from this pin to ground can reduce the output to a very low noise level. This pin can be left open if low noise at the output is not required.
5	OUT	O	Regulator output voltage pin. A 2.2 μ F or larger ceramic capacitor from OUT to ground is required to ensure regulator stability.

Package/Ordering Information

ORDERABLE DEVICE	PACKAGE TYPE	MARKING	OUTPUT VOLTAGE	PACKING OPTION
LP2992IM5X-1.2/NOPB	SOT23-5	LFAB	1.2V	Tape and Reel, 3000
LP2992IM5X-1.8/NOPB	SOT23-5	LFGB	1.8V	Tape and Reel, 3000
LP2992IM5X-2.5/NOPB	SOT23-5	LFDB	2.5V	Tape and Reel, 3000
LP2992IM5X-3.0/NOPB	SOT23-5	LF8B	3.0V	Tape and Reel, 3000
LP2992IM5X-3.3/NOPB	SOT23-5	LFEB	3.3V	Tape and Reel, 3000
LP2992IM5X-5.0/NOPB	SOT23-5	LFFB	5.0V	Tape and Reel, 3000

Electrical Specifications

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
IN, OUT and EN Pins	IN, OUT and EN	-0.3 to 22	V
BYPASS Pin	BYP	-0.3 to +6	V
Storage temperature range	T _{STG}	-65 to +150	°C
Output current	I _{OUT}	300	mA

Notes:

1. Exposure of the device under conditions beyond the limits specified by Maximum Ratings for extended periods may cause permanent damage to the device and affect product reliability. These conditions represent a stress rating only, and functional operations of the device at these or any other conditions above the operational limits noted in this specification is not implied.

ESD Ratings

		Value	Unit
V _{ESD}	Electrostatic Discharge	HBM (Human Body Model)	3000
		CDM (Charge Device Model)	1000

Recommended Operation Conditions

Over operating temperature range unless otherwise noted

Parameter	Symbol	Min	Max	Unit
Input Supply Voltage	V _{IN}	2.5	20	V
Enable Input Voltage	EN	0	20	V
Output Voltage	V _{OUT}	1.2	5	V
Bypass Pin Voltage	BYP	0	5	V
Output Capacitance	C _{OUT}	1	220	μF
Output Current	I _{OUT}	0	300	mA
Operating Junction Temperature	T _J	-40	125	°C

Thermal Information

Package	R _{θJA}	Unit
SOT23-5	205	°C/W


Electrical Characteristics

$V_{IN} = 2.5V$ or $V_{IN} = V_{OUT} + 1V$ (whichever is greater), $I_{OUT} = 1mA$, $C_{OUT} = 2.2\mu F$, typical values are at $T_A = 25^\circ C$ unless otherwise noted

Parameter	Symbol	Conditions	Rating			Unit
			Min	Typ	Max	
Input Voltage	V_{IN}		2.5	-	20	V
Output Voltage Accuracy		$0.1mA \leq I_{OUT} \leq 300mA$	-2.0	0	2.0	%
GND Pin Current	I_{GND}	$V_{IN} = 2.5V$, No Load		80		μA
		$V_{IN} = 2.5V$, $I_{OUT} = 300mA$		156		μA
Shutdown Current	I_{SHDN}	$V_{IN} = 2.5V$, $V_{EN} = 0V$		2.3		μA
Dropout Voltage	V_{DO}	$V_{OUT} = 3.3V$, $I_{OUT} = 300mA$		152		mV
Output Current Limit	I_{LIM}	$V_{OUT} = 0$	300			mA
Line Regulation	$\Delta V_{OUT}(\Delta V_{IN})$	$V_{IN} = V_{OUT} + 1V$ to 20V		0.15		mV/V
Load Regulation	$\Delta V_{OUT}(\Delta I_{OUT})$	$V_{IN} = 6V$, $I_{OUT} = 1mA$ to 300mA		5		mV/A
EN pin low-level input voltage (device disabled)	$V_{IL(EN)}$				0.5	V
EN pin high-level input voltage (device enabled)	$V_{IH(EN)}$		1.6			V
EN PIN Leakage Current	I_{EN}	$V_{EN} = 20V$		0.8		μA
Power Supply Ripple Rejection	PSRR	$f = 1kHz$, $V_{OUT} = 5V$, $I_{OUT} = 300mA$		64		dB
Output Noise Voltage	V_N	$BW = 300Hz$ to 50kHz, $C_{BYP} = 10nF$, $C_{OUT} = 2.2\mu F$, $V_{OUT} = 1.8V$, $I_{OUT} = 300mA$		45		μV
Thermal Shutdown Temperature	TSD			160		$^\circ C$
Thermal Shutdown Hysteresis	T_{HYS}			20		$^\circ C$


Typical Characteristics

$C_{IN} = 1\mu F$, $C_{OUT} = 2.2\mu F$, $I_{OUT} = 300mA$, $T_A = 25^\circ C$ unless otherwise noted

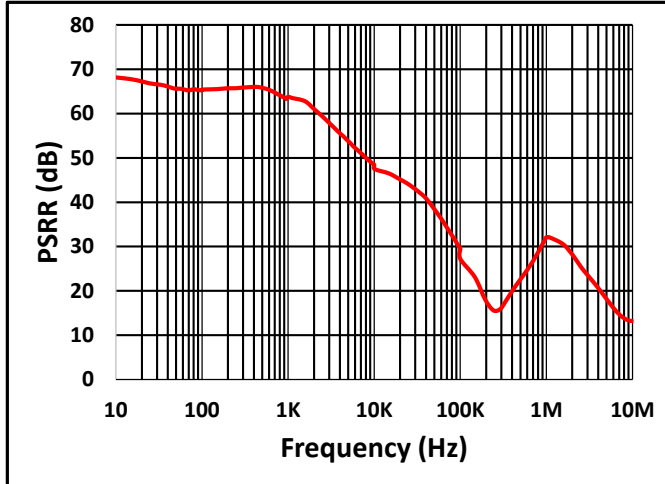


$V_{IN} = 6V$, $V_{OUT} = 5V$, $I_{OUT} = 300mA$, $C_{OUT} = 2.2\mu F$

Fig. 1 PSRR

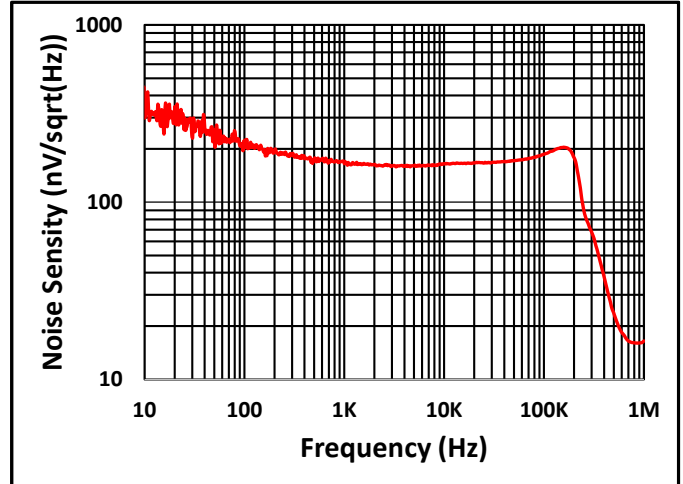


$V_{IN} = 2.5V$, $V_{OUT} = 1.8V$, $I_{OUT} = 300mA$, $C_{OUT} = 2.2\mu F$

Fig. 2 Output Noise Density

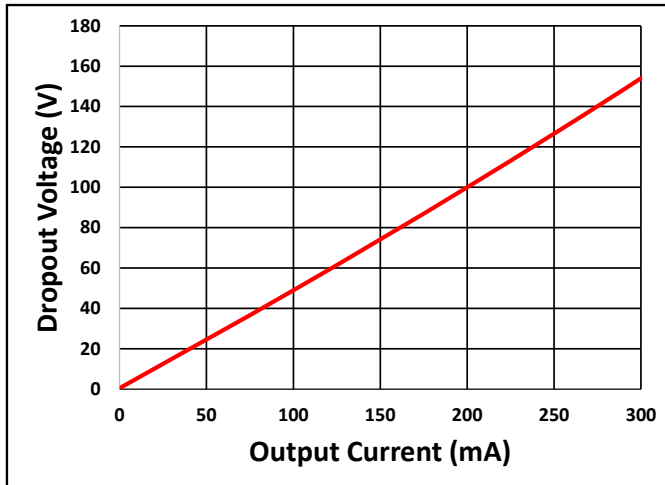

$V_{IN} = 6V$

Fig. 3 Dropout Voltage

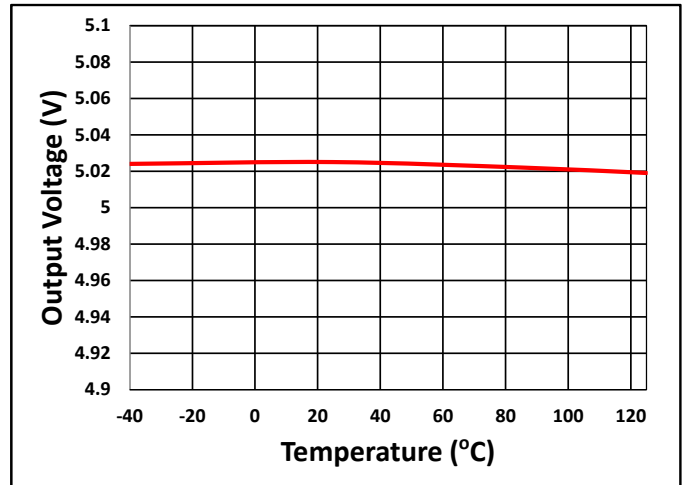

$V_{IN} = 6V$, $V_{OUT} = 5V$, $I_{OUT} = 0.1mA$

Fig. 4 Output Voltage vs Temperature

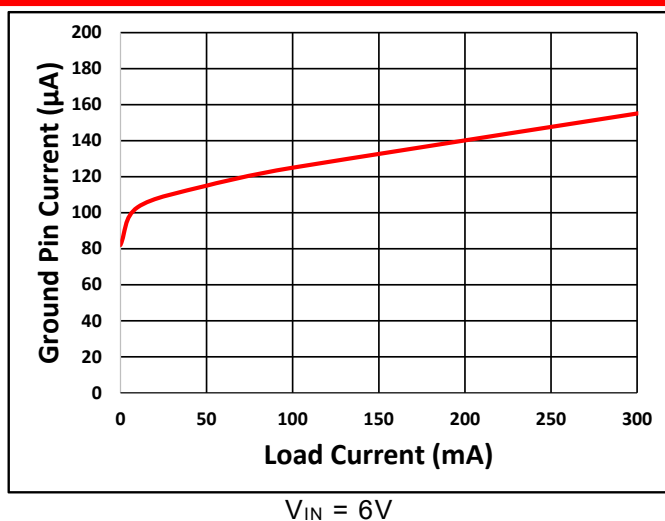


Fig. 5 Ground Current vs Load Current

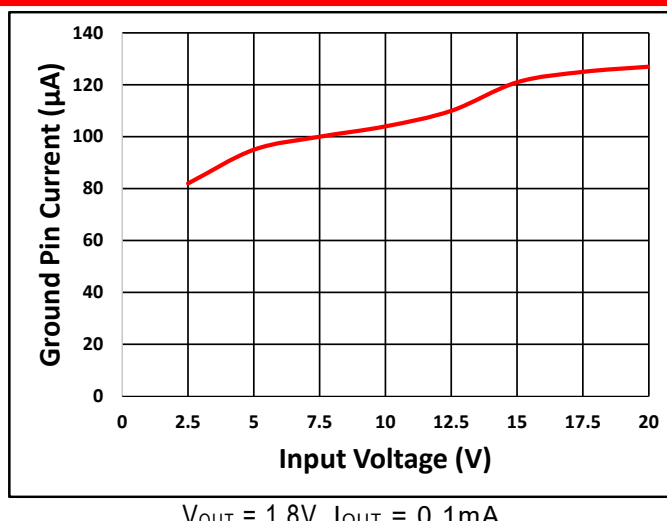


Fig. 6 Ground Current vs Input Voltage

Feature Description

The enable pin for the LDO is active high. The device is enabled when the enable pin voltage is greater than $V_{IH(EN)}$ and disabled with the enable pin voltage less than $V_{IL(EN)}$. If independent control of chip enable is not needed, then connect the enable pin to the input. The LDO has an internal pulldown MOSFET that connects a discharge resistor from V_{OUT} to ground when the device is disabled to actively discharge the output voltage.

When overload events happen, the output current is internally limited.

The LDO uses an undervoltage lockout circuit to keep the output shut off until the internal circuitry is operating properly.

The LDO contains a thermal shutdown protection circuit to turn off the output current when excessive heat is dissipated in the LDO.

PACKAGE OUTLINE DIMENSIONS

SOT23-5

尺寸 标注	最小 (mm)	最大 (mm)	尺寸 标注	最小 (mm)	最大 (mm)
A	2.82	3.02	C	1.05	1.15
e	0.95 (BSC)		C1	0.03	0.15
b	0.28	0.45	C2	0.12	0.23
B	1.50	1.70	L	0.35	0.55
B1	2.60	3.00	θ	0°	8°

