

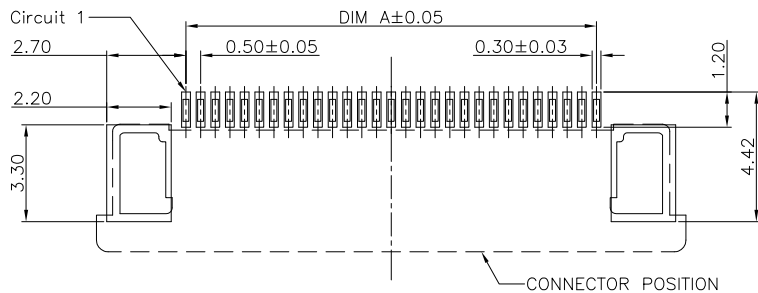



SECTION A-A
SCALE 1:1

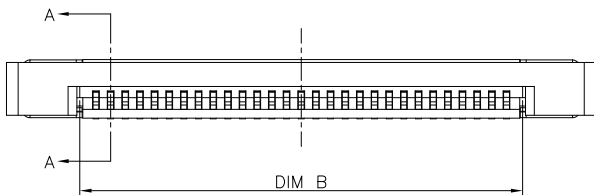

RECOMMENDED P.C.B. PATTERN LAYOUT

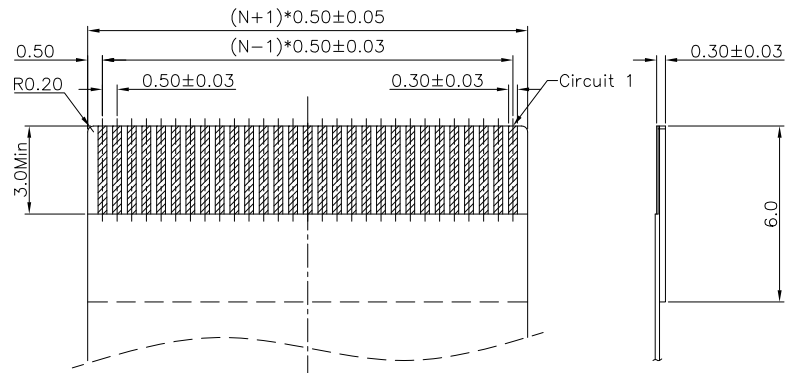


RECOMMENDED FPC/FFC DIMENSION

- Note:
- Material:
 - Housing: thermoplastic high temp.UL94V-0; Color: natural.
 - Latch: thermoplastic high temp.UL94V-0; Color: black.
 - Terminal: copper alloy.
 - Fitting Nail: copper alloy.
 - Finish:
 - Terminal:
Underplating: Au/matt Tin overall.
 - Fitting Nail:
Underplating: matt Tin overall.
 - Product must comply HF RoHS specification.
 - Product No:
AFC07-S ** F * * - **
CKTS CONTACTS TYPE F:Lower
PLATING
1:Gold flash 1u"
2:Gold flash 2u"
3:Gold flash 3u"
B:Bright-Tin 90-120u"
C:Matt-Tin 90-120u"
PACKING
A:Tape&Reel
C:Tube
REMARKS
HF:Halogen free

CKTS	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F
4	1.50	2.60	6.50	7.60		
5	2.00	3.10	7.00	8.10		
6	2.50	3.60	7.50	8.60		
7	3.00	4.10	8.00	9.10		
8	3.50	4.60	8.50	9.60		
9	4.00	5.10	9.00	10.10		
10	4.50	5.60	9.50	10.60		
11	5.00	6.10	10.00	11.10		
12	5.50	6.60	10.50	11.60		
13	6.00	7.10	11.00	12.10		
14	6.50	7.60	11.50	12.60		
15	7.00	8.10	12.00	13.10		
16	7.50	8.60	12.50	13.60		
17	8.00	9.10	13.00	14.10		
18	8.50	9.60	13.50	14.60		
19	9.00	10.10	14.00	15.10	5.20	6.45
20	9.50	10.60	14.50	15.60		
21	10.00	11.10	15.00	16.10		
22	10.50	11.60	15.50	16.60		
23	11.00	12.10	16.00	17.10		
24	11.50	12.60	16.50	17.60		
25	12.00	13.10	17.00	18.10		
26	12.50	13.60	17.50	18.60		
27	13.00	14.10	18.00	19.10		
28	13.50	14.60	18.50	19.60		
29	14.00	15.10	19.00	20.10		
30	14.50	15.60	19.50	20.60		
31	15.00	16.10	20.00	21.10		
32	15.50	16.60	20.50	21.60		
33	16.00	17.10	21.00	22.10		
34	16.50	17.60	21.50	22.60		
35	17.00	18.10	22.00	23.10		
36	17.50	18.60	22.50	23.60		
37	18.00	19.10	23.00	24.10		
38	18.50	19.60	23.50	24.60		
39	19.00	20.10	24.00	25.10		
40	19.50	20.60	24.50	25.60		
41	20.00	21.10	25.00	26.10		
42	20.50	21.60	25.50	26.60		
43	21.00	22.10	26.00	27.10		
44	21.50	22.60	26.50	27.60		
45	22.00	23.10	27.00	28.10		
46	22.50	23.60	27.50	28.60		
47	23.00	24.10	28.00	29.10		
48	23.50	24.60	28.50	29.60		
49	24.00	25.10	29.00	30.10		
50	24.50	25.60	29.50	30.60		
51	25.00	26.10	30.00	31.10		
52	25.50	26.60	30.50	31.60		
53	26.00	27.10	31.00	32.10		
54	26.50	27.60	31.50	32.60		
55	27.00	28.10	32.00	33.10		
56	27.50	28.60	32.50	33.60		
57	28.00	29.10	33.00	34.10		
58	28.50	29.60	33.50	34.60		
59	29.00	30.10	34.00	35.10		
60	29.50	30.60	34.50	35.60		

CUSTOMER DRAWING		浙江创都电子科技有限公司	
Tolerance Unspecified (未注公差)	Size(图幅): A4	Product Name(产品名称):	
0.0 ±0.15 0° ±5°	Unit(单位): MM	0.5Pitch H=2.0 FPC ZIF R/A Type3 Lower SMT CONN	
0.00 ±0.10 0° 0 ±3°	Scale(比例): 1 : 1	Product No(产品料号):	
0.000 ±0.05 0° 00 ±1°	Project View (投影视角)	AFC07-S20FCA-00-H2.0	
	Page(页数): 1 OF 1	Designer(设计): Allan	Checked(审核): Approved(核准):
Rev(版本): A			



-
- Technical drawing of a rectangular plate with four rectangular holes and a central circular hole. The drawing includes dimensions: overall width W , overall height 1.75 ± 0.10 , hole diameter $\phi 1.50^{+0.10}_{-0.00}$, hole spacing 4.0 and 2.0 , hole width 12.0 , and hole depth 2.8 . A dimension F is shown from the top edge to the center of the first hole. The text "单边孔" (Single-sided hole) is present.

CLASSIFICATION DIMENSION (尺寸类别): FAI (首次检验): <input checked="" type="radio"/> To <input type="radio"/> <input checked="" type="radio"/> MARK IS MAJOR DIM (重点尺寸标示) <input checked="" type="radio"/> MARK IS CRITICAL DIM (Cpk&Cp标示)		<h1>浙江创都电子科技有限公司</h1>		
Tolerance Unspecified (未注公差) 0.0 ±0.10 0° ±3° 0.00 ±0.05 0° 0 ±2° 0.000 ±0.02 0° 00 ±1°		Product Name (产品名称): 0.5Pitch H=2.0 FPC 拉拔卧式3代SMT型. 载带		
Size (图幅): A4 Unit (单位): MM Scale (比例): 1 : 1		Product No (产品料号): EB-595XXX230-00		
Project View (投影视角) 		Drawing No (图面编号): DNE00013-1		Date (日期): 2011/05/05
Page (页数): 1 OF 1 Rev (版本): 1.0		Designer (设计): Allan Checked (审核): Approved (核准): 		