


7183-6097



△ 7183-6097-90

△ 7183-6097-40




7183-6152 (リブ違い品)

△ 7183-6152-60



24.70

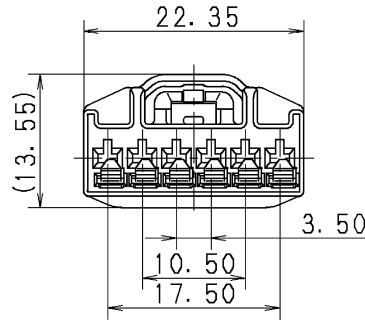

注 記

- △ 1) かん合相手品番 : 7183-6152 : A (直結専用)
: 7183-6097 : A (直結専用)
: 7182-6097
- △ 2) 適用端子品番 : 7116-4780-02 (CAVS 0.3~0.5)
: 7116-4781-02 (CAVS 0.85~1.25)

NOTES

- △ 1) MATING PART NO. : 7183-6152 : A (DIRECT)
: 7183-6097 : A (DIRECT)
: 7182-6097
- △ 2) APPLICABLE TERMINAL NO. : 7116-4780-02 (CAVS 0.3~0.5)
: 7116-4781-02 (CAVS 0.85~1.25)



GENERAL TOLERANCE														
	10MAX	50MAX	100MAX	250MAX	250OVR	R5 MAX	R10 MAX	R20 MAX	R20 OVR	ANGLE	ECCENT			
A	±0.15	±0.2	±0.3	±0.5	±0.75	±0.2	±0.3	±0.5	±2.5	±3°	0.1	ISSUE MARK		
B	±0.2	±0.3	±0.55	±0.95	±1.4					±3°	0.1			
C	±0.3	±0.5	±0.8	±1.4	±2	±3°	0.15							
CUSTOMER						MATL. PBT				TREAT. & FIN.				
CUSTOMER PART NO.				CUSTOMER DWG NO.				NAME				△ 060 6P HOUSING		
OFFICE				TRIAL PART NO.				FEMALE						
VENDOR				VENDOR NO.										
DWG TYPE	DWG SOURCE		DWG DATE		UNIT	SCL	ANGLE	PART NO.						
R	NEW		01.10.11		mm	2:1	3	CH. CODE					7183-6097 ETC.	
APPROVED		CHECKED	CHECKED		DESIGN		DRAWN		DWG NO.				7183-6097:R	SET DWG NO.
S. MIZUSE		_____		R. DE GUZMAN		S. KAYAMA		M. ALAGAR						
10.11.15		_____		10.11.15		00.10.26		10.11.15		YAZAKI CORPORATION				

GENERAL TOLERANCE						ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1
C	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15
SPECIFIED						MASS	