

Specifications:

规格:

Voltage rating:250V AC/DC

额定电压: 250V AC/DC

Current rating:10A AC/DC

额定电流: 10A AC/DC

Withstanding voltage:1500V

AC/minute

耐受电压: 1500V AC/分钟

Temperature range:-25°C-+85°C

温度范围: -25℃-+85℃

Insulation resistance: $\geq 1000\text{M}\Omega$



绝缘电阻: $\geq 1000\text{M}\Omega$

Contact resistance: $\leq 10\text{m}\Omega$

接触电阻: $\leq 10\text{m}\Omega$

After environmental testing: $\leq 20\text{m}\Omega$

环境测试后: ≤ 20 兆欧



X5050 W R X-04B-XX SN XX

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

① Series No

② Category : W-WAFER

③ Welding Board Angle : R-Ri ght Angl e 90°

④ Welding Way: Bl

⑤ Row No.-Pin No.: XX-Single Row


⑥ Special No: B-With buckle 、 the poi sitive angle

⑦ Material: 6T-PA6T 94V-0 ; 9T-PA9T 94V-0

N2-PA66 94V-2

⑧ Plating Category: SN-Bright Tin Plating

⑨ Color : Blank-Natural Color ; BK-Black

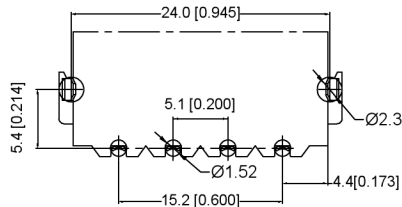

~~Recommended P.C.B Lay out~~

General Tolerance ± 0.05

X5050WR-04B-N2	Nylon 66 UL 94V-2	Brass	Tin-Plated	Spcc	Tin-Plated	X5050H
X5050WR-04B-9T5N	Nylon 9T UL 94V-0					
X5050WR-04B6T5N	Nylon 6T UL 94V-0					
PART NO	Material	Material(Pin)	Finish(Pin)	Material (Metal/Band)	Finish (Metal/Band)	Mates With X'KB Housing

广东星坤科技股份有限公司

生		日期
發		
ΔX		
MARSH	文件工程章	REVIS
		www.hel

			XKB	ANGULAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
				L ≥ 63	±0.5
				UNSPECIFIED TOLERANCES	
ONS					
xkb.com					

DSND		DATE		SCALE: N/A	MODEL TYPE: X5050WR-04B-XXSN						
DWN		DATE		VIEW: 	PART NO.:						
CHKD		DATE		UNIT: mm/in	5.08mm Crimp Style Connectors						
APPD		DATE		SIZE: A4	DWG NO.:						
XKB INDUSTRIAL PRECISION CO.,LIMITED					<table><tr><td>WEIGHT</td><td>SHEET</td><td>REVISION</td></tr><tr><td>1.0g</td><td>1/1</td><td>A0</td></tr></table>	WEIGHT	SHEET	REVISION	1.0g	1/1	A0
WEIGHT	SHEET	REVISION									
1.0g	1/1	A0									