

NO.	ECN NO.	DESCRIPTION	DATE
1			

Electronical:
Current Rating: 3 Amps
Withstanding Voltage: 500V AC/DC
Insulation Resistance: 1000M Ohms Min.
Operating Temperature: -40°C to +105°C
Max Processing Temp.: 230°C for 30~60 seconds
(260°C for 10 seconds)

Material:
Housing: PA9T
Terminal: Copper Alloy
Plated: Gold or Tin all over based on the Ni
(Standard: Gold flash all over)
Packed: PE Bag

Unspecified Tolerance: ±0.20mm

Part number information:

YZT1070-06104-**025-01

A B C D E

A、Serial No.

YZT1070: 90° DLP pin header

B、Needle size:

Diameter * total

C、NO. of positions:

1*01-1*40pins

D、Spacing:

025: PH2.54mm





E、Manner of packing

01: loose

PIN No.	Dim.(mm)	
	L1	L2
1*1	*****	2.54
1*2	2.54	5.08
1*3	5.08	7.62
1*4	7.62	10.16
1*5	10.16	12.70
1*6	12.70	15.24
1*7	15.24	17.78
1*8	17.78	20.32
1*9	20.32	22.86
1*10	22.86	25.40
1*11	25.40	27.94
1*12	27.94	30.48
1*13	30.48	33.02
1*14	33.02	35.56
1*15	35.56	38.10
1*16	38.10	40.64
1*17	40.64	43.18
1*18	43.18	45.72
1*19	45.72	48.26
1*20	48.26	50.80
1*21	50.80	53.34
1*22	53.34	55.88
1*23	55.88	58.42
1*24	58.42	60.96
1*25	60.96	63.50
1*26	63.50	66.04
1*27	66.04	68.58
1*28	68.58	71.12
1*29	71.12	73.66
1*30	73.66	76.20
1*31	76.20	78.74
1*32	78.74	81.28
1*33	81.28	83.82
1*34	83.82	86.36
1*35	86.36	88.90
1*36	88.90	91.44
1*37	91.44	93.98
1*38	93.98	96.52
1*39	96.52	99.06
1*40	99.06	101.60

C23	3.00	4.36	6.00
C22	3.00	3.90	7.90
C21	8.00	6.32	3.20
C20	5.84	4.38	3.05
C19	6.00	4.22	3.05
C18	3.00	6.50	7.50
C17	4.00	4.36	3.00
C16	4.50	3.20	2.80

C38	1.50	1.90	2.43	C15	8.08	3.88	2.80
C37	6.00	4.40	3.00	C14	4.00	3.20	2.80
C36	3.80	4.38	3.05	C13	3.40	3.20	6.55
C35	3.00	4.15	11.35	C12	6.10	3.20	3.50
C34	3.30	3.15	5.10	C11	3.60	3.20	3.60
C33	3.00	3.33	2.90	C10	3.60	4.26	3.50
C32	3.00	3.33	5.90	C09	8.00	4.16	3.20
C31	3.50	4.00	2.00	C08	4.00	3.20	3.00
C30	10.0	4.32	3.00	C07	3.00	4.36	1.60
C29	3.50	4.26	3.50	C06	6.00	4.36	3.50
C28	4.00	6.86	3.00	C05	3.50	4.36	3.50
C27	3.00	4.40	6.10	C04	6.10	4.26	3.50
C26	3.00	4.36	6.00	C03	3.50	3.2	3.50
C25	3.00	3.90	7.90	C02	3.60	4.26	6.10
C24	8.00	6.32	3.20	C01	6.00	4.36	3.00
Code	A	B	C	Code	A	B	C

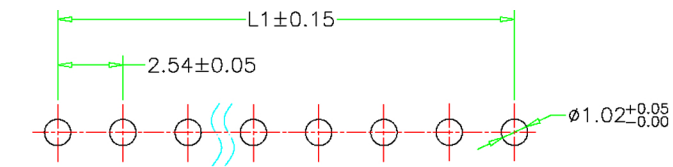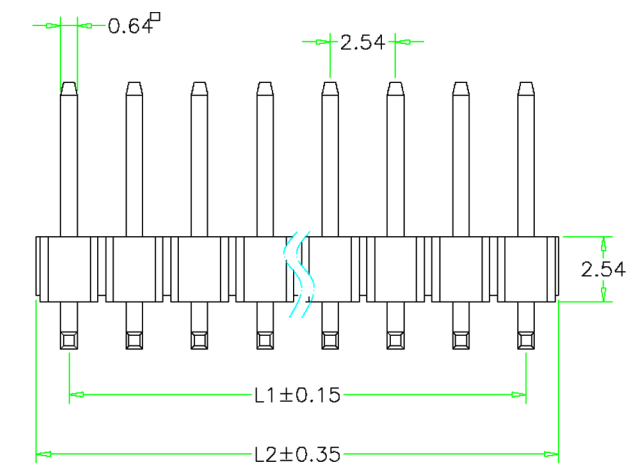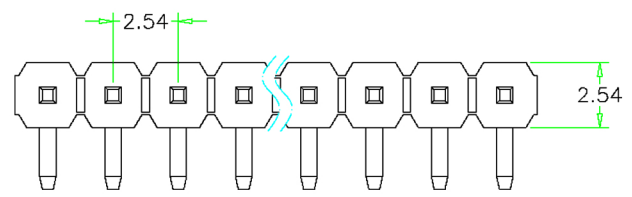

Recommended P.C.B Layout

深圳市鑫扬泽电子有限公司

HTTP://WWW.XYZPOGOPIN.COM
TEL:0755-28773277 FAX:0755-28891353



SCALE:	N/A	UNIT	mm
SHEET:	1 of 1	PROJECTION	
DATE:	2018.04.12	VER.	A.0

THE UNMARKED TOLERANCE ARE AS BELOW :			
LENGTH		ANGLE	
X.XX	±0.05mm	X.XX	±0.50°
X.X	±0.10mm	X.X	±1.00°
X.	±0.20mm	X.	±2.00°

DESIGNED BY:		DWG. NO.	YZT1070-06104系列
CHECKED BY:		TITLE:	Pogo pin
APPROVED BY:			