

# Flexible Armoured SY PVC (YSLYSY) Multicore Control Cable

pro-POWER



RoHS  
Compliant

## Application

These steel wire braided flexible connecting cables for instrumentation and control equipment, for tooling machinery production lines, and in flexible applications for free movement without tensile load. Suitable for use in dry, moist and wet rooms. The galvanised steel wire braid serves as protection against mechanical traverse loads and acts as a magnetic screen against interference. These cables are not used for outdoor or underground installation.

SY control cables are not suitable for fixed wiring applications requiring compliance with the regulations set out in BS7671.

## Characteristics

Voltage Rating	: 300/500V
Test Voltage	: 4kV
Temperature Rating	: Fixed: -40°C to +80°C Flexed: -5°C to +70°C
Minimum Bending Radius	: Fixed: 4 x overall diameter Flexed: 12.5 x overall diameter


## Cable Standards

VDE 0207-363-3, VDE 0285-525-2-51, VDE 0285-525-1, VDE 0285-525-2-11, VDE 0482-332-1-2, VDE 819-102 (TM54)  
Flame Retardant according to IEC 60332-1-2



## UK Laboratory Tested

This product is subject to the Quality Assurance protocols of The Cable Lab®, a UKAS accredited ISO 17025 cable testing laboratory. Testing includes vertical flame, conductor resistance, tensile & elongation, and dimensional consistency, verified to published standards and approved product drawings.

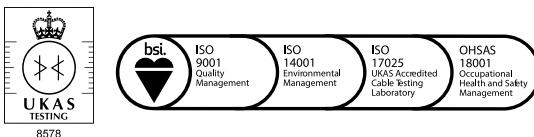

## Regulatory Compliance

This cable meets the requirements of the Low Voltage Directive 2014/35/EU and the RoHS Directive 2011/65/EU. RoHS compliance has been tested and confirmed by The Cable Lab® as meeting the requirements of the BSI RoHS Trusted Kitemark™.



## Construction

### Conductor

Class 5 flexible plain copper wires

[www.element14.com](http://www.element14.com)  
[www.farnell.com](http://www.farnell.com)  
[www.newark.com](http://www.newark.com)  
[www.cpc.co.uk](http://www.cpc.co.uk)

pro-POWER

# Flexible Armoured SY PVC (YSLYSY) Multicore Control Cable

pro-POWER

## Insulation

PVC (Polyvinyl Chloride)

## Inner Sheath

PVC (Polyvinyl Chloride)

## Armour

GSWB (Galvanised Steel Wire Braid)

## Sheath

PVC (Polyvinyl Chloride)

## Core Identification

Black with white number

From 3 cores: Black with white number + Green/Yellow

## Sheath Colour

Transparent

## Dimensions

Part Number	No. of Cores	Nominal Cross Sectional Area mm <sup>2</sup>	Nominal Thickness of Insulation mm	Nominal Thickness of Sheath mm	Nominal Overall Diameter mm	Nominal Weight kg/km
PP001584	2	0.75	0.4	0.8	7.2	79.3
PP001585	2	1	0.4	0.8	7.6	91
PP001586	2	1.5	0.4	0.8	8.2	110
PP001587	3	0.75	0.4	0.8	7.5	91.3
PP001588	3	1	0.4	0.8	7.9	104
PP001589	3	1.5	0.4	0.8	8.6	129
PP001590	3	2.5	0.5	0.9	10.1	185
PP001591	3	4	0.6	1	12	269
PP001592	3	6	0.65	1.1	13.5	354
PP001593	4	0.75	0.4	0.8	8	107
PP001594	4	1	0.4	0.8	8.5	124
PP001595	4	1.5	0.4	0.8	9.2	151
PP001596	4	2.5	0.5	0.9	11.1	230
PP001597	4	4	0.6	1.1	13.2	332
PP001598	4	6	0.65	1.2	14.8	442
PP001599	5	0.75	0.4	0.8	8.5	120
PP001600	5	1	0.4	0.8	9.1	140
PP001601	5	1.5	0.4	0.9	10.1	182
PP001602	5	2.5	0.5	1	12.1	266
PP001603	5	4	0.6	1.1	14.2	382
PP001604	5	6	0.65	1.3	16.5	525
PP001605	7	0.75	0.4	0.8	9.1	147

# Flexible Armoured SY PVC (YSLYSY) Multicore Control Cable

pro-POWER

Part Number	No. of Cores	Nominal Cross Sectional Area mm <sup>2</sup>	Nominal Thickness of Insulation mm	Nominal Thickness of Sheath mm	Nominal Overall Diameter mm	Nominal Weight kg/km
PP001606	7	1	0.4	0.9	9.9	181
PP001607	7	1.5	0.4	0.9	11	226
PP001608	7	2.5	0.5	1.1	13.2	338
PP001578	12	0.75	0.4	1	10.9	237
PP001579	12	1	0.4	1	12.7	280
PP001580	12	1.5	0.4	1.1	14.2	365
PP001581	18	0.75	0.4	1.1	13.7	322
PP001582	18	1	0.4	1.2	14.9	396
PP001583	18	1.5	0.4	1.3	16.8	521

## Electrical Characteristics

Nominal Cross Sectional Area mm <sup>2</sup>	Current Carrying Capacities 30°C Continuous Loading A	Maximum Resistance of Conductor at 20°C Ω/km
0.75	12	26
1	15	19.5
1.5	18	13.3
2.5	26	7.98
4	34	4.95
6	44	3.3

## Part Number Table

Description	No. of Cores	Nominal Cross Sectional Area mm <sup>2</sup>	Reel Length	Part Number
Flexible Armoured SY PVC (YSLYSY) Multicore Control Cable	2	0.75	50m	PP001584
	2	1		PP001585
	2	1.5		PP001586
	3	0.75		PP001587
	3	1		PP001588
	3	1.5		PP001589
	3	2.5		PP001590
	3	4		PP001591
	3	6		PP001592
	4	0.75		PP001593
	4	1		PP001594

# Flexible Armoured SY PVC (YSLYSY) Multicore Control Cable

pro-POWER

Description	No. of Cores	Nominal Cross Sectional Area mm <sup>2</sup>	Reel Length	Part Number
Flexible Armoured SY PVC (YSLYSY) Multicore Control Cable	4	1.5	50m	PP001595
	4	2.5		PP001596
	4	4		PP001597
	4	6		PP001598
	5	0.75		PP001599
	5	1		PP001600
	5	1.5		PP001601
	5	2.5		PP001602
	5	4		PP001603
	5	6		PP001604
	7	0.75		PP001605
	7	1		PP001606
	7	1.5		PP001607
	7	2.5		PP001608
	12	0.75		PP001578
	12	1		PP001579
	12	1.5		PP001580
	18	0.75		PP001581
	18	1		PP001582
	18	1.5		PP001583

**Important Notice :** This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. pro-POWER is the registered trademark of the Group. © Premier Farnell Limited 2016.