
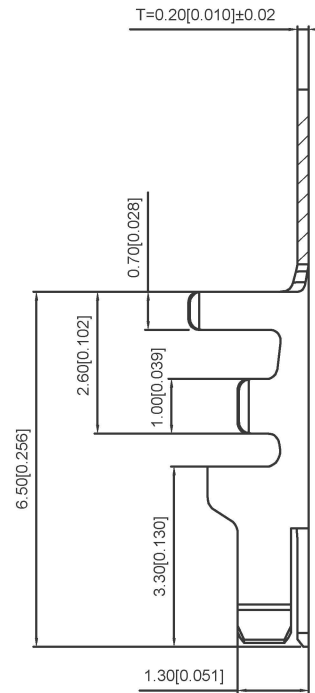


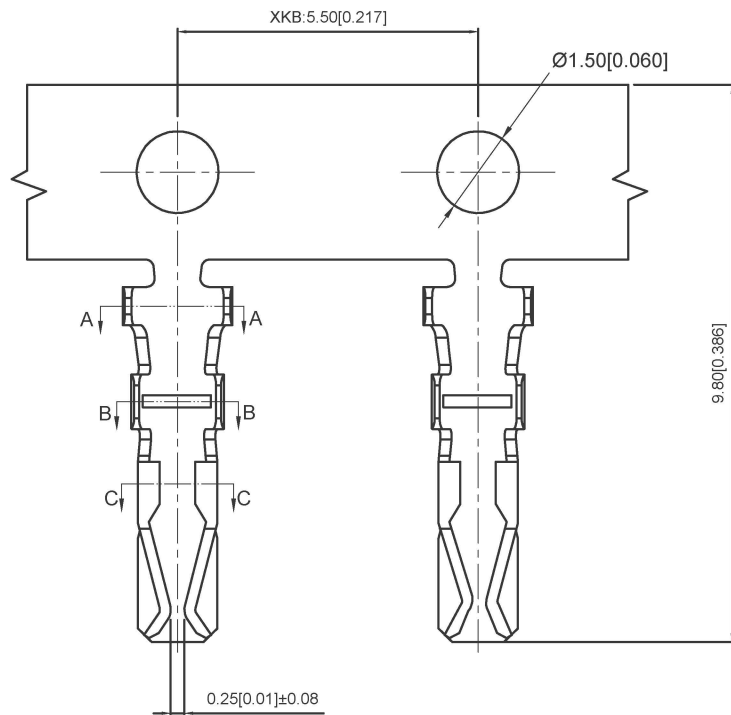





Specifications:
规格:
Voltage rating:250V AC/DC
额定电压: 250V AC/DC
Current rating:3A AC/DC
额定电流: 3A AC/DC
Withstanding voltage:1000V AC/minute
耐受电压: 1000V AC/分钟

Temperature range:-25℃~+85℃
温度范围: -25℃~+85℃
Insulation resistance:≥1000MΩ
绝缘电阻: ≥1000MΩ
Contact resistance:≤30mΩ
接触电阻: ≤30mΩ
After environmental testing:≤40mΩ
环境测试后: ≤40兆欧

X2011 T X - P SN X - A

① ② ③ ④ ⑤ ⑥ ⑦

- 1.Series Number
- 2.Category:T-terminal0
- 3.Shape:Blank-ordinary
- 4.Material:P-Phosphor bronze
- 5.Plating style:SN-Bright tin plating
- 6.Plating method:Blank-Stamping before plating
- 7.Mold No/Mark/Special No:A-Mating 2011-A HSG

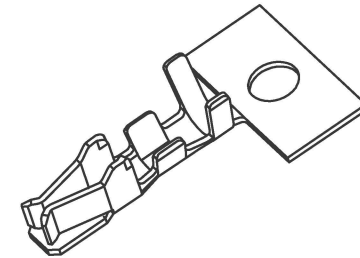

X2011T-PSN-A	Phosphor Bronze	AWG#22-30	1.45mm(MAX)	Stamping Before Plating:30u"MIN. Ni;70u"MIN.Sn	X2011H-A
PART NO	Material	Wire Range	Insulation OD	Finish	Suitable XKB Terminal

广东星坤科技股份有限公司

SECTION:A-A
SCALE:1:1

SECTION:B-B
SCALE:1:1

SECTION:C-C
SCALE:1:1

生 效 日期

文件工程章

REVISIONS

www.xk-dg.cn www.helloxkb.com www.helloxkb.cn

units: mm
tolerance:
X.X ±0.2mm
X.XX ±0.1mm
X.XXX ±0.05mm

UNSPECIFIED TOLERANCES

DSND		DATE		SCALE: N/A	MODEL TYPE: Wire to board connector
DWN		DATE		VIEW:	PART NO.: 2.00mm Crimp Style Connectors
CHKD		DATE		UNIT: mm/in	DWG NO.: X2011T-PSN-A
APPD		DATE		SIZE: A4	
XKB INDUSTRIAL PRECISION CO.,LIMITED				WEIGHT 1.0g	SHEET 1/1
				REVISION A0	