



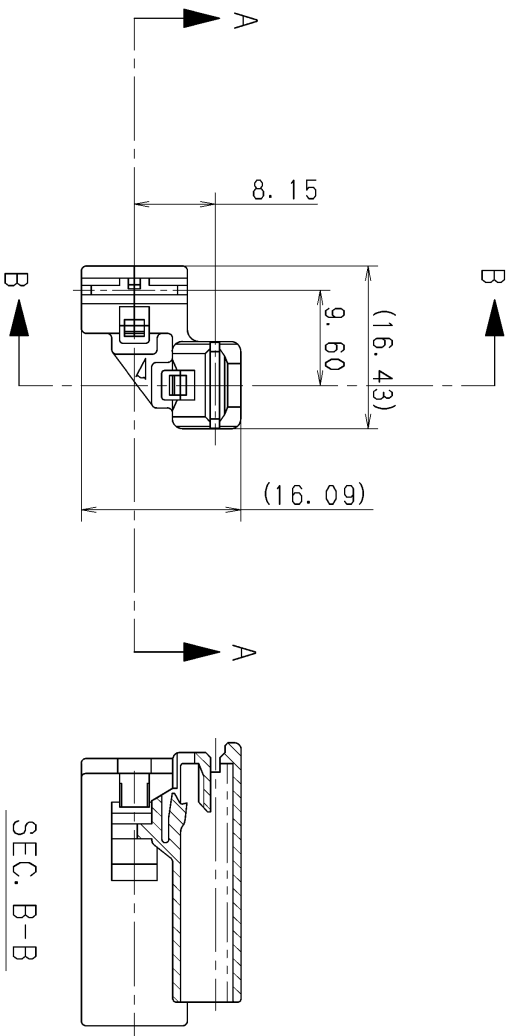

SEC. B-B

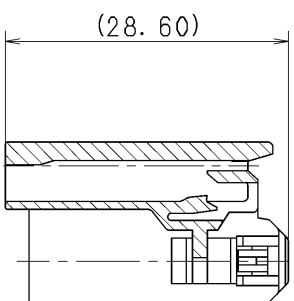

SEC. A-A

△ 注記

1. 通用端子品番： 7116-2784, 7116-2783, 7116-7150

NOTE

△ 1. APPLICABLE TERMINAL NO. : 7116-2784, 7116-2783, 7116-7150

								CUSTOMER				MATERIAL		TREAT.	
								CUSTOMER PART NO.				SPEC.		& FIN.	
△		11. 04. 20		CHANGE DRAWING NO.		ETC.		C11-Z259		K. K		NAME		POSITIVE LOCK HOUSING	
93. 12. 10				NEW				C93-M268		H. M		TRIAL PART NO.		-----	
LET		DATE		REVISION RECORD				NO.		CHKD		FEMALE 2P			
GENERAL TOLERANCE															
		10MAX		50MAX		100MAX		250MAX		250OVR		ANGLE		ECCENT	
A		±0. 15		±0. 2		±0. 3		±0. 5		±0. 75		±30'		0. 1	
B		±0. 2		±0. 3		±0. 55		±0. 95		±1. 4		±30'		0. 1	
C		±0. 3		±0. 5		±0. 8		±1. 4		±2		±30'		0. 15	
SPECIFIED														MASS	
11. 04. 20		11. 04. 20		11. 04. 20		11. 04. 20		11. 04. 20		87. 02. 25		11. 04. 20			
												YAZAKI CORPORATION			