


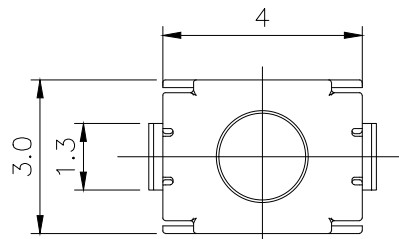
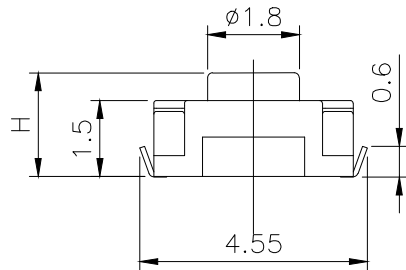




RoHS

CAD GENERATED DRAWING. DON'T CHANGE BY HAND.

REV.	ECN. NO.	APPD.

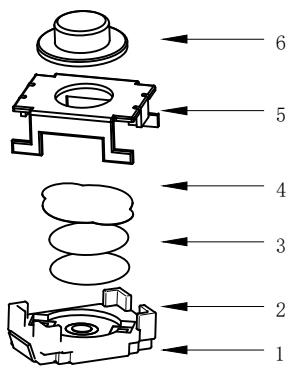

CIRCUIT DIAGRAM

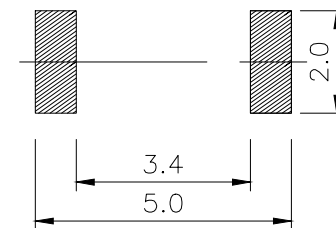

PCB. WELDING DRAWING

Specification

Operating Life	100,000
Contact rating	50mA@12V DC.
Insulation resistance	1011Ω min.
Contact resistance	100mΩ max. initial
Dielectric Strength	250 V AC(1mm)
Travel	0.2±0.15mm
Storage Temperature	- 30° C to 80° C

E	Button	LCP/Silica	1	Black/Blue
D	COVER	Stainless Steel	1	Cleaning
C	DOME	Stainless Steel	1	Plated Ag
B	HOUSING	PPA	1	Black
A	PIN	PHOSPHOR BRONZE	1	Plated Ag
ITEM	DESCRIPTION	MATERIAL	QTY	FINISH/COLOR


Mechanical

Type	Operating Force(gf)	Height mm	Button	Leads Shape (6, J, T)	Ground pin (6, 1)	Page Option (0, 1)
BTS0A010	2	250±50	B	2.0	U(Blue) B(Black)	J
	1	180±50	A	1.8		

X.	±0.50	X.°	± 2°
.X	±0.30	.X°	± 1°
.XX	±0.10	.XX°	± 0.5°
.XXX	± 0.05		

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF Bozhong TECHNOLOGY CO.,LTD

UNITS	mm
MAT'L	
FINISH	
Q' TY	

 博众电气	东莞市博众电气有限公司 Dongguan Bozhong Electrical Co., Ltd
PART NO. BTS0A010	TITLE: TACTILE SWITCH 3x4mm
APPD: ROGER	DWG NO.: BTS0A010
CHKD: ROC	
DR: BILLY WANG 2020/08/21	
	
	SCALE SHEET REV. 1/1 1/1 A1

Packaging:
Reel of 4,000 pieces.