
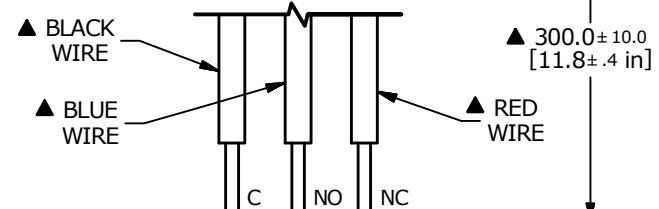
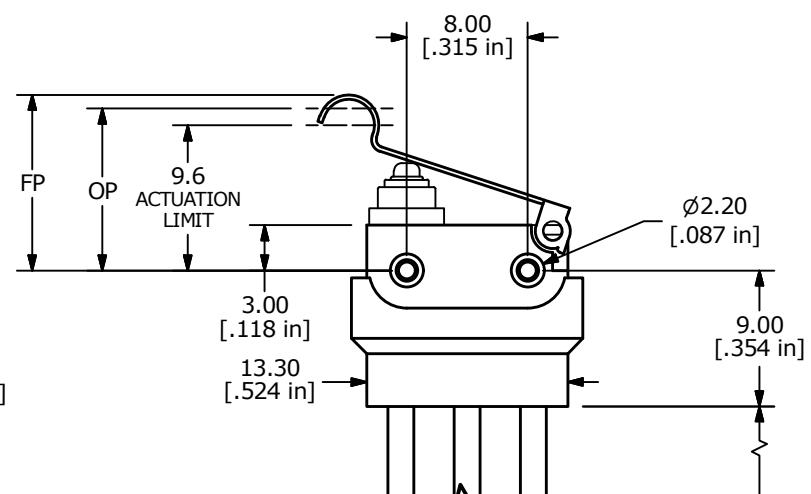
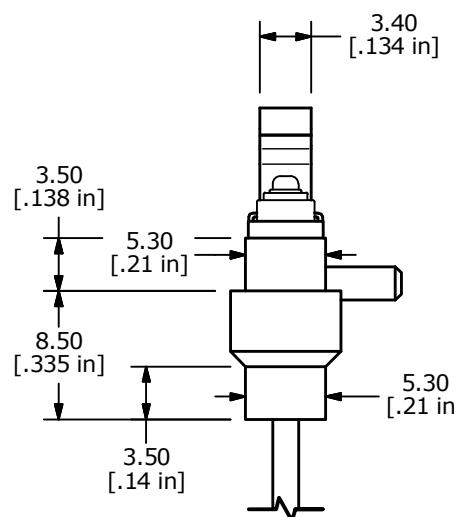


O.P. (MM)	F.P. (MM)
10.8±0.8	12.0 MAX

O.P. = OPERATING POINT  
F.P. = FREE-POSITION

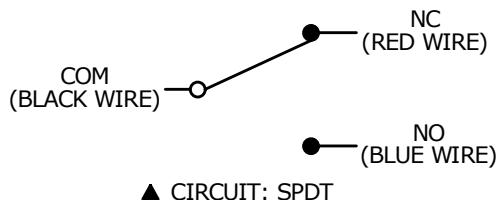

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X =  $\pm 0.4$   
X.XX =  $\pm 0.25$
3. RATING: 0.1A @ 125VAC; 2A @ 12VDC;  
0.5A @ 42VDC; 1A @ 24VDC;  
UL, CUL APPROVED
4. OPERATING FORCE:  $70 \pm 30$  GRAMS.
5. OPERATING TEMP: -25°C to 85°C
6. ELECTRICAL LIFE: 10,000 CYCLES MIN.
7. MECHANICAL LIFE: 1,000,000 CYCLES TYP.
8. INSULATION RESISTANCE: >100 MEGA-OHMS @ 500VDC
9. DIELECTRIC STRENGTH: 600VAC
10. CONTACT RESISTANCE: 100 MILLI-OHMS MAX (INITIAL).
11. WIRES ARE 22AWG, STRANDED, UL1007, COLOR AS NOTED
12. 2011/65/EU (ROHS) COMPLIANT.
13. ▲ DENOTES CRITICAL PARAMETER.
14. ACTUATION BELOW THE 9.6mm ACTUATION LIMIT MAY CAUSE DAMAGE TO THE INTERNAL CONTACTS.

5.0±1.0  
[.20±.04 in]  
STRIPPED LENGTH

 E-SWITCH®

TITLE WS0850102F070WA

A	23891	New Release	5/13/19	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY  
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	DATE	DR	DWG	REV
2:1	5/13/2019	MW	Q930009	A

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[E-Switch:](#)

[WS0850102F070WA](#)