


Capacitor, Tantalum, 330 uF, 7343, +/-20% Tol, 10V@85C, Failure Rate=A

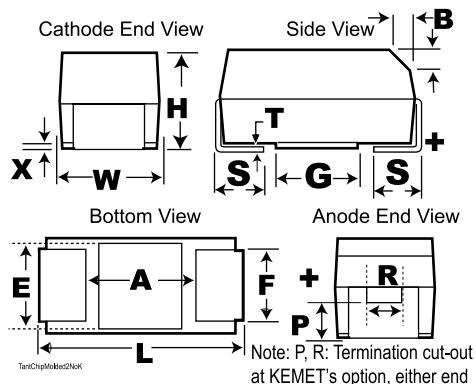

Dimensions (mm)		
Symbol	Dimension	Tolerance
L	7.3	+/-0.3
W	4.3	+/-0.3
H	4	+/-0.3
F	2.4	+/-0.1
S	1.3	+/-0.3
B	0.5	+/-0.15
X	0.1	+/-0.1
P	1.7	REF
R	1	REF
T	0.13	REF
A	3.8	MIN
G	3.5	REF
E	3.5	REF

Notes:

-In polarity stripe, at KEMET's option, type may be indicated: no symbol = Standard (or low leakage) MnO₂ tantalum chip, O = LowESR T494, R = Low ESR T495, F = Fused T496, HT = 150C rated T498 (or B45196P, B45198P), H = 175C rated T499, H2 = 200C rated T50

General Information	
Supplier:	KEMET
Construction:	Standard Chip-Polymer
Testing:	Standard Testing Only

Specifications	
Capacitance:	330 uF
Voltage DC @ 85C:	10V
Voltage DC @ 105C:	10V
Tolerance:	+/-20%
Application:	Military COTS/Upscreened/Low ESR
Body Type:	Molded Chip
ESR:	10 mOhm
Temperature Range:	-55/+105C
Footprint:	7343
Termination:	Tin
RoHS:	Yes
Leakage Current:	330 uA
Dissipation Factor:	10%
Ripple @ 25C:	4.97 A
Ripple @ 85C:	3.479 A
Ripple @ 105C:	1.2425 A

Packaging Specifications	
Package Kind:	T&R
Package Quantity:	500

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.