


Current Rating :0.5mA
Voltage Rating :5V AC/DC
Ambient Temperature Range :-20°C~+60°C
Storage Temperature Range :-40°C~+85°C
Ambient Humidity Range :95% R.H. Max.
Contact Resistance:100m Ω max.
Insulation Resistance:1000M Ω min./500VDC
产品耐温温度：-55℃
-55℃
Rating Cycles:1500Min Insertions

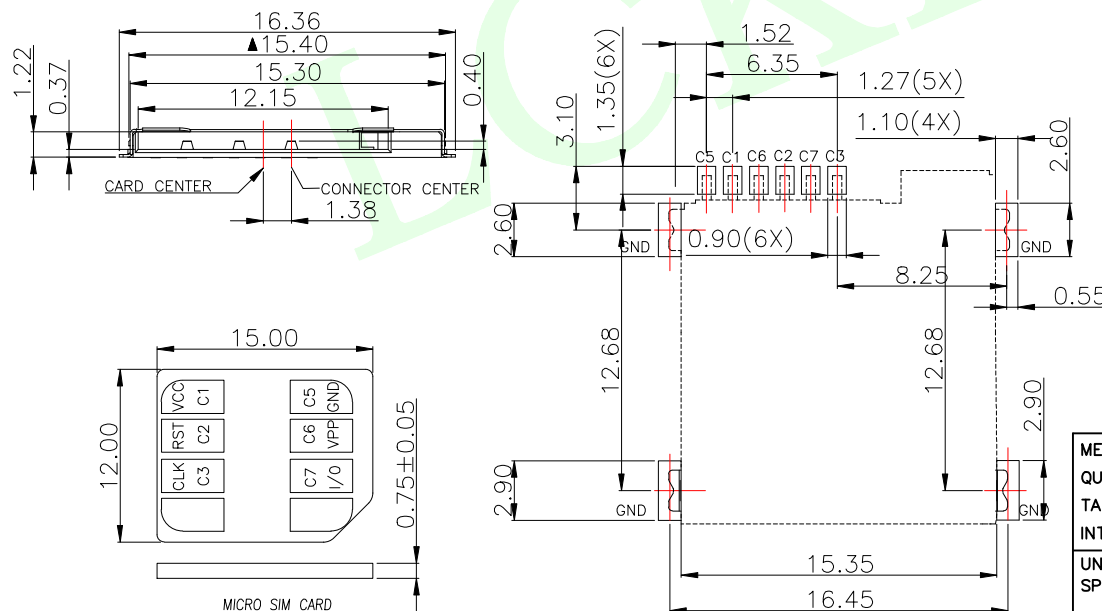

SIM pin assignment	
PIN#	Name
C1	VCC供电电压
C2	RST重置
C3	CLK时钟
C5	GND接地
C6	VPP程序电压
C7	I/O输入输出

连晟欣 —
LCK
产品类别 —
MS: MINI SIM
SIM: MICRO SIM
NANO: NANO SIM

产品流水料号识别码—

产品PIN位
P6: 6PIN

电镀规格
G: gold flash
G1: 1U
G3: 3U
(以此类推)

L: 圆盘

—有柱无柱
Y: 有柱
W: 无柱

— 产品高度
H135: 1.35MM

REV: 04	SCALE: 1:1	UNIT: mm
SIZE: A4	SHEET: 1/1	



联晟欣连接器（深圳）有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd