


RoHS Compliant

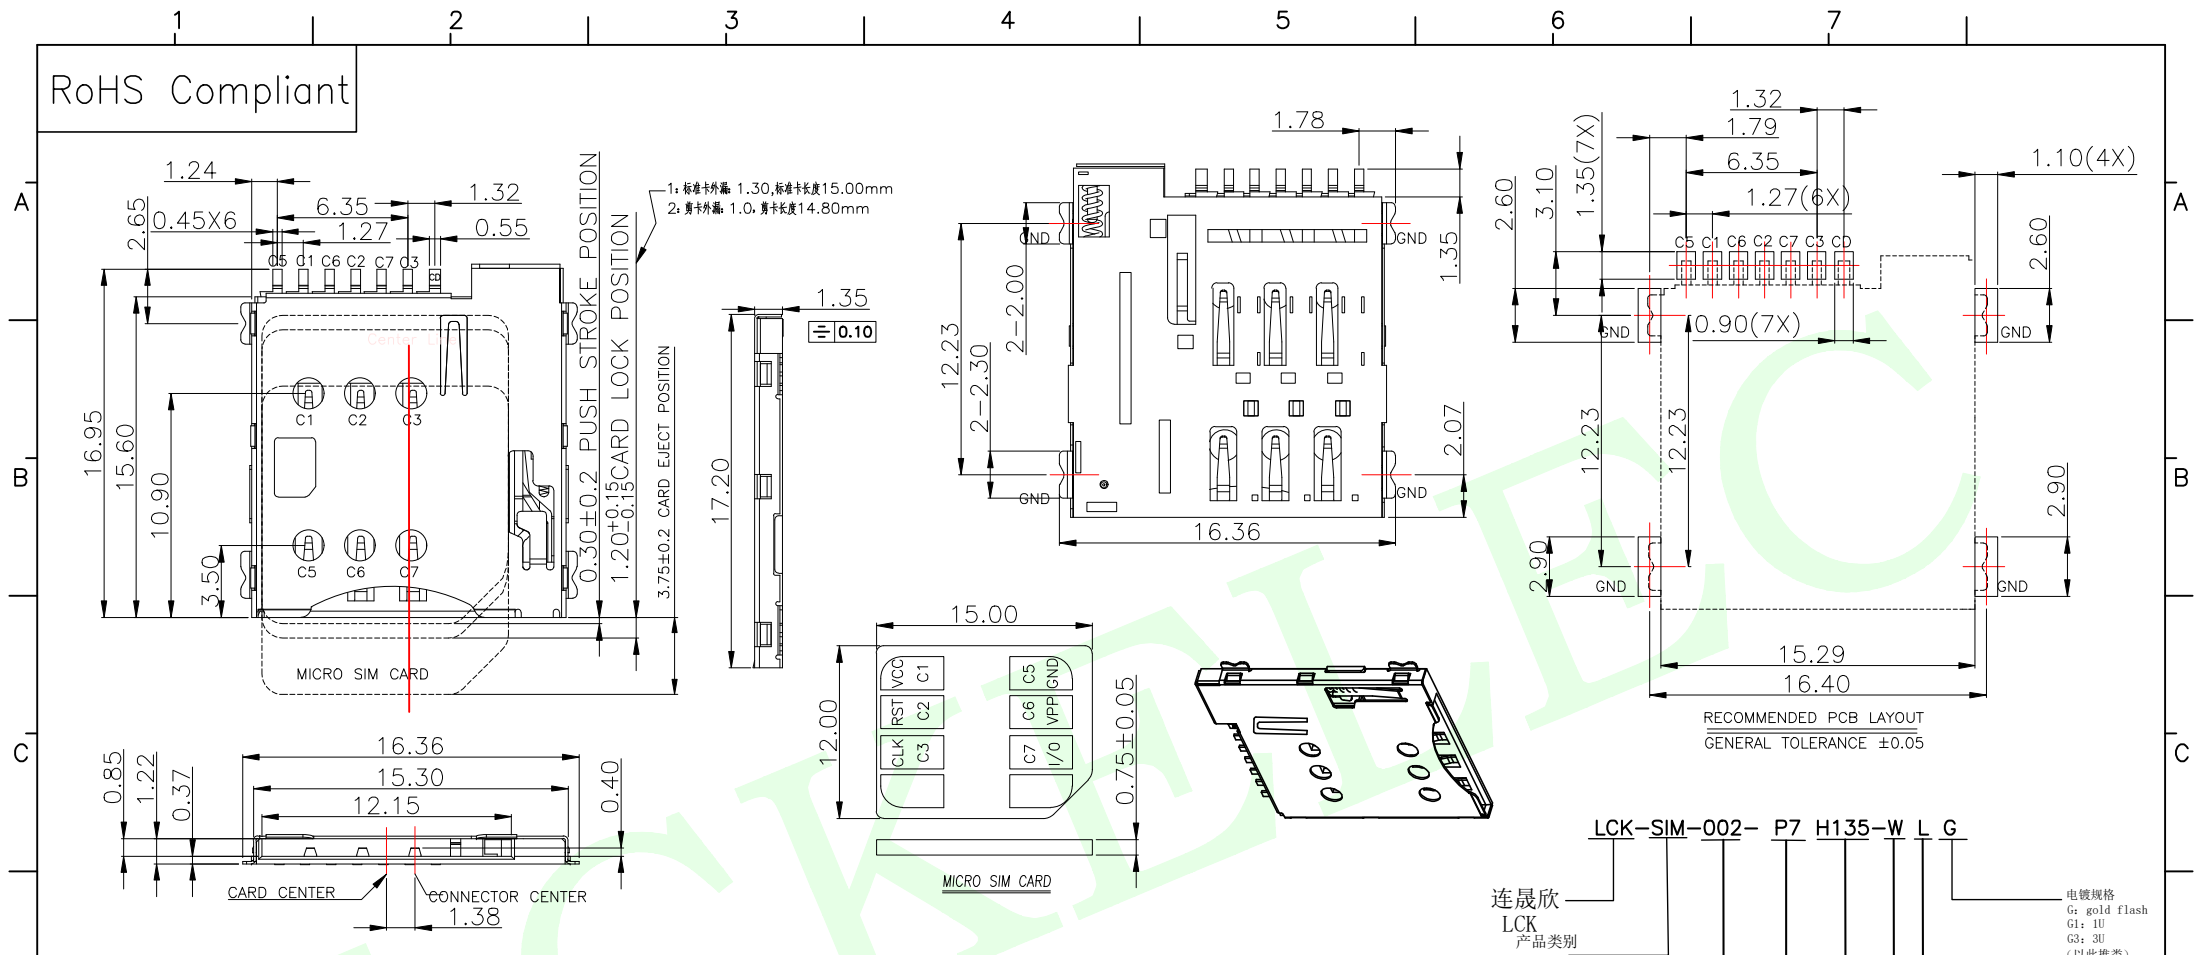

Specification

MATERIAL:


Insulator: High Temperature Thermoplastic, UL 94V-0.
Contact: Copper Alloy
SHELL: SUS

PLATING:

Contact: Plated 50u" Ni Over all Contact Au 1U
Shell: Plated 50u" Ni Overall
Plated 1u"Au Selective Contact Area

Electrical:

Current Rating :0.5mA
Voltage Rating :5V AC/DC
Ambient Temperature Range :-20°C~+60°C
Storage Temperature Range :-40°C~+85°C
Ambient Humidity Range :95% R.H. Max.
Contact Resistance:100m Ω max.
Insulation Resistance:1000M Ω min./500VDC
产品耐温温度: 260°C 'C S<1.70>'C S<1.70>+5°C
Mating Cycles:1500Min Insertions

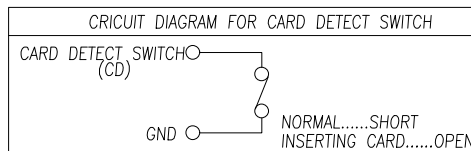

LCK-SIM-002- P7 H135-W L G

连晟欣
LCK
产品类别

MS: MINI SIM
SIM: MICRO SIM
NANO: NANO SIM

产品流水料号识别码

产品PIN位
P7: 7PIN

产品高度
H135: 1.35MM

电镀规格
G: gold flash
G1: 1U
G3: 3U
(以此类推)

包装方式
L: 圆盘

有柱无柱
Y: 有柱
W: 无柱

SIM pin assignment

PIN#	Name
C1	VCC供电电压
C2	RST重置
C3	CLK时钟
C5	GND接地
C6	VPP编程电压
C7	I/O输入输出

MEASURE POINT:

QUADRANT POINT (QP)
TANGENCY POINT (TP)
INTERSECTION POINT (IP)

UNLESS OTHERWISE SPECIFIED, TOLERANCE:

X. ±0.25
X.x ±0.20
X.xx ±0.15
ANGULAR ±3°

联晟欣连接器 (深圳) 有限公司
Lianshengxin Connector (Shenzhen) Co., Ltd

DESIGN	Andy	DATE	2014.12.24	TITLE:	MICRO SIM PUSH PUSH 1.35H
CHECKED		DATE			7P无柱#CD PIN
APPROVED		DATE			
PART NO:	LCK-SIM-002-P7H135-WLG	REV:	04	SCALE:	1:1
DRAWING NO:	102022200	SIZE:	A4	SHEET:	1/1