



RoHS Compliant

NOTES:
 1. MATERIAL:
 1-1.Insulator: High Temperature Thermoplastic,UL 94V-0
 1-2.Contact: Copper ALLoy
 2. PLATING:
 2-1.Contact: Plated 30u" Ni Overall,Contact area gold-plated G/F, Plated 80u" Sn Over Ni On Solder Area
 2-2.Shell: Plated 30u" Ni Overall
 3.ELECTRICAL REQUIREMENTS:
 3-1.RATED CURRENT: 0.5A
 3-2.Voltage Rating :125V AC/DC
 3-3.Ambient Temperature Range : -20°C~+60°C
 3-4.Storage Temperature Range : -40°C~+70°C
 3-5.Ambient Humidity Range :95% R.H. Max.
 3-6.Contact Resistance:100m Ω
 3-7.Insulation Resistance:1000M min./500VDC Ω
 3-8.Mating Cycles:5000 Insertions
 3-9.产品耐温温度: 260+0/-5°C


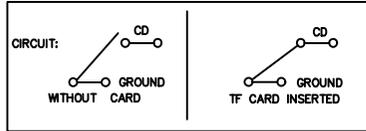


PIN NO.	NAME	TYPE	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLK	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DAT0	I/O/PP	DATE LINE(BIT0)
8	DAT1	I/O/PP	DATE LINE(DIT1)
9	CD	CD	CD

产品采购完整示意号: LCK-TF-01AH1809-WLG

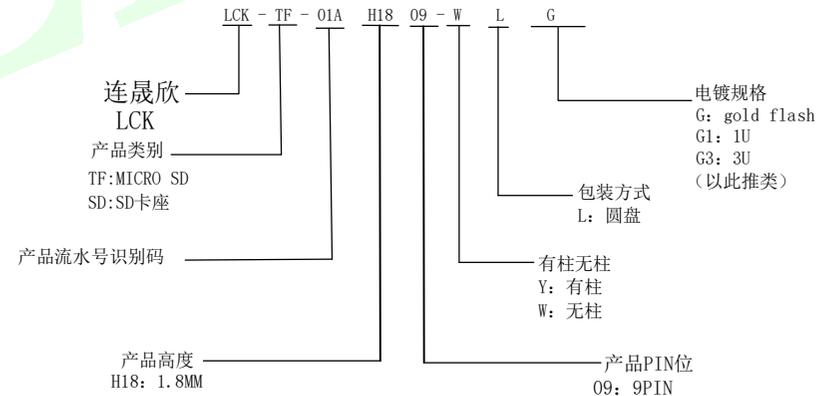

NO.	ASSIGNMENT
1#	DAT2
2#	CD/DAT3
3#	CMD
4#	VDD
9#	CD
5#	CLK
6#	VSS
7#	DAT0
8#	DAT1

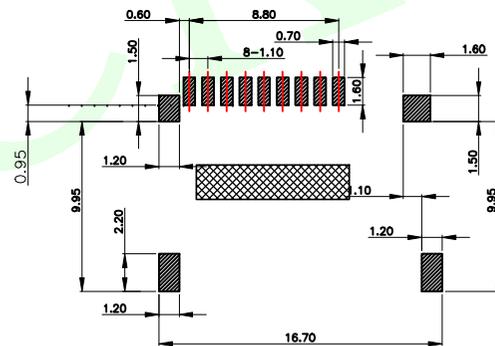

(RECOMMENDED/P.C.B) HOLE LAYOUT
 COMPONENT SIDE VIEW TOLERANCE: ±0.05

■ SMT SOLDER AREA.
 ▨ NO PATTERN AREA

MEASURE POINT	QUADRANT POINT	TANGENCY POINT	INTERSECTION POINT	<p>联晟欣连接器 (深圳) 有限公司 Lianshengxin Connector (Shenzhen) Co., Ltd</p>	DESIGN Andy DATE 2014.12.24 TITLE: TF PUSH PUSH 9PIN外焊无柱1.8H		
UNLESS OTHERWISE SPECIFIED, TOLERANCE:	X. ±0.25	X.x ±0.20	X.xx ±0.15		CHECKED	DATE	DATE
ANGULAR ±3°	APPROVED				PART NO: LCK-TF-01AH1809WLG	REV: 04	SCALE: 1:1
DRAWING NO: 102022012R				SIZE: A4		SHEET: 1/1	