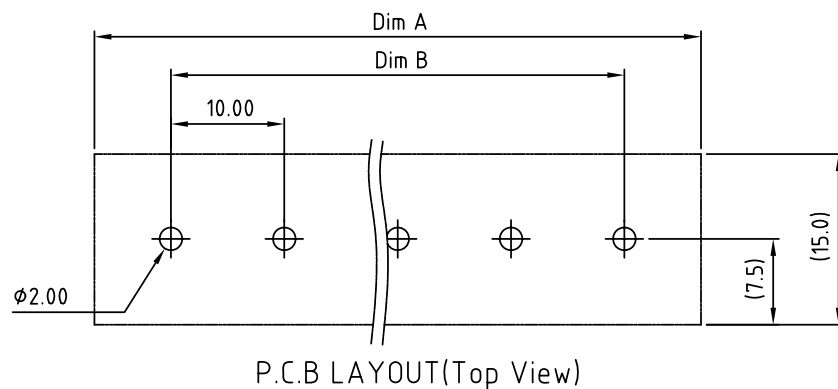


MATERIALS ELECTRICAL

RATED VOLTAGE & CURRENT:	300 V, 20 A
WITHSTAND VOLTAGE:	AC 2000 V/Min
INSULATION RESISTANCE:	1000 MΩ OR MORE AT DC 500 V
OPERATING TEMPERATURE RANG:	Δ -40 °C ~+115 °C
SCREW TORQUE VALUE:	12Lb-In.
WIRE RANGE:	22 - 12 AWG
1) MOLDED PARTS:	THERMOPLASTIC , UL 94 V-0 BLACK
2) TERMINAL:	BRASS, 0.8t, Tin PLATED
3) TERMINAL SCREWS:	STEEL, M3.5

APPROVAL: us

Critical dimension: ∇_C

PART NO.:

YK 601 xx 0 x x 00G

G:RoHS compliant(lead<4%)
in copper alloy

NO. OF POLES

04: 4 POLES

05: 5 POLES
06: 6 POLES

30: 30 POLE

— MARK

0: "@" MARK

1: "ANY" MARK

— TERMINAL & SCREW PLATED

0: TERMINAL & SCREW: G/F

3 1: TERMINAL: G/F, SCREW: Zinc

2: TERMINAL: S_n, SCREW: G/F

△ 3: TERMINAL: Sn, SCREW: Zinc

N=Number of contacts
Dimension A&B

DIM A	$N \times 10 + 3.5$
DIM B	$(N-1) \times 10$

Poles \ Tol.	Dim A&B
4p	±0.20
5-10p	±0.30
11-24p	±0.40
25-30p	±0.50

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	YK-601 Without Flange& Cover Series(4-30P)						
PART NO.	YK601xx0xx00G			DWG NO.	8YK0002-601		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Jacky 2012.11.13	Jacky 2012.11.13		UNIT: mm		X. ±0.50
					SCALE: NONE		X.X ±0.30
					REV: D		X.XX ±0.10
				SHEET: 01/01			X° ±1°